



Plenum 4.1/9.5 Mini DIN Male to 7/16 DIN Male Low PIM Cable  
100 CM Length Using SPP-250-LLPL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C4134-100CM

**Configuration**

- Connector 1: 4.1/9.5 Mini DIN Male
- Connector 2: 7/16 DIN Male
- Cable Type: SPP-250-LLPL

**Features**

- Max Frequency 6 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 100 dB
- 76% Phase Velocity
- FEP Jacket
- PIM < -160 dBc
- 100% Tested with PIM Test Results Marked on Cable
- UL910 Plenum Rated Cable
- Lightweight and Extremely Flexible
- Low Loss with Excellent VSWR
- IP67 (when mated)

**Applications**

- General Purpose
- Laboratory Use
- Low PIM Applications
- Distributed Antenna Systems (DAS)
- Plenum Installations
- Multi-Carrier Communication Systems
- PIM Testing



**Description**

Pasternack's low PIM plenum cable assemblies using SPP-250-LLPL coax and 4.1/9.5 mini DIN male to 7/16 DIN male connections are part of our full line of RF components available for same-day shipping. These 4.1/9.5 mini DIN male to 7/16 DIN male plenum coax cable assemblies deliver low PIM performance to support Distributed Antenna Systems (DAS) and other complex, multi-carrier communication systems. The SPP-250-LLPL coax cable has been certified in accordance with UL910 for plenum coaxial cable installations. Each 4.1/9.5 mini DIN male to 7/16 DIN male cable assembly is 100% tested for Passive Intermodulation (PIM) and the tested value is marked directly on the cable.

Our 4.1/9.5 mini DIN male to 7/16 DIN male cable datasheet specifications and drawing with dimensions are shown below in this PDF. Whether the need is to provide a low PIM jumper connection, low PIM test cable or simply create a custom cable assembly configuration, Pasternack has the right cable assemblies for the job.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum 4.1/9.5 Mini DIN Male to 7/16 DIN Male Low PIM Cable 100 CM Length Using SPP-250-LLPL Coax , LF Solder PE3C4134-100CM](#)



Plenum 4.1/9.5 Mini DIN Male to 7/16 DIN Male Low PIM Cable  
100 CM Length Using SPP-250-LLPL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C4134-100CM

**Electrical Specifications**

| Description             | Minimum | Typical      | Maximum | Units        |
|-------------------------|---------|--------------|---------|--------------|
| Frequency Range         | DC      |              | 6       | GHz          |
| VSWR                    |         |              | 1.35:1  |              |
| Velocity of Propagation |         | 76           |         | %            |
| RF Shielding            | 100     |              |         | dB           |
| Passive Intermodulation |         | -165         | -160    | dBc          |
| Capacitance             |         | 27 [88.58]   |         | pF/ft [pF/m] |
| Inductance              |         | 0.067 [0.22] |         | uH/ft [uH/m] |
| Operating Voltage (AC)  |         |              | 750     | Vrms         |

**Specifications by Frequency**

| Description           | F1     | F2     | F3     | F4     | F5     | Units |
|-----------------------|--------|--------|--------|--------|--------|-------|
| Frequency             | 0.5    | 1      | 2      | 4      | 6      | GHz   |
| Insertion Loss (Max.) | 0.53   | 0.59   | 0.67   | 0.79   | 0.89   | dB    |
| VSWR (Max.)           | 1.25:1 | 1.25:1 | 1.25:1 | 1.35:1 | 1.35:1 |       |

Electrical Specification Notes:

PIM test results vary between cables

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.4dB of connector loss.

**Mechanical Specifications**

**Cable Assembly**

|          |                      |
|----------|----------------------|
| Length*  | 39.37 in [100 cm]    |
| Diameter | 0.28 in [7.11 mm]    |
| Weight   | 0.535 lbs [242.67 g] |

**Cable**

|                                      |                                  |
|--------------------------------------|----------------------------------|
| Cable Type                           | SPP-250-LLPL                     |
| Impedance                            | 50 Ohms                          |
| Inner Conductor Type                 | Solid                            |
| Inner Conductor Material and Plating | Copper, Bare                     |
| Dielectric Type                      | PTFE                             |
| Number of Shields                    | 1                                |
| Shield Layer 1                       | Helically Corrugated Copper Tube |
| Outer Conductor Diameter             | 0.25 in [6.35 mm]                |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum 4.1/9.5 Mini DIN Male to 7/16 DIN Male Low PIM Cable 100 CM Length Using SPP-250-LLPL Coax , LF Solder PE3C4134-100CM](#)



Plenum 4.1/9.5 Mini DIN Male to 7/16 DIN Male Low PIM Cable  
100 CM Length Using SPP-250-LLPL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C4134-100CM

|                              |                   |
|------------------------------|-------------------|
| Jacket Material              | FEP               |
| Jacket Diameter              | 0.28 in [7.11 mm] |
| One Time Minimum Bend Radius | 1.5 in [38.1 mm]  |

**Connectors**

| Description                  | Connector 1           | Connector 2      |
|------------------------------|-----------------------|------------------|
| Type                         | 4.1/9.5 Mini DIN Male | 7/16 DIN Male    |
| Impedance                    | 50 Ohms               | 50 Ohms          |
| Contact Material and Plating | Brass, Silver         | Brass, Silver    |
| Dielectric Type              | PTFE                  | PTFE             |
| Body Material and Plating    | Brass, Tri-Metal      | Brass, Tri-Metal |
| Seal Gasket Material         | Silicone Rubber       | Silicone Rubber  |

Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8$ ", whichever is greater.

**Environmental Specifications**

**Temperature**

|                 |                   |
|-----------------|-------------------|
| Operating Range | -55 to +200 deg C |
| Storage Range   | -55 to +200 deg C |
| Plenum Rating   | UL910             |

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum 4.1/9.5 Mini DIN Male to 7/16 DIN Male Low PIM Cable 100 CM Length Using SPP-250-LLPL Coax , LF Solder PE3C4134-100CM](#)



Plenum 4.1/9.5 Mini DIN Male to 7/16 DIN Male Low PIM Cable  
100 CM Length Using SPP-250-LLPL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C4134-100CM

Typical Performance Data



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum 4.1/9.5 Mini DIN Male to 7/16 DIN Male Low PIM Cable 100 CM Length Using SPP-250-LLPL Coax , LF Solder PE3C4134-100CM](#)



Plenum 4.1/9.5 Mini DIN Male to 7/16 DIN Male Low PIM Cable  
100 CM Length Using SPP-250-LLPL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C4134-100CM

**How to Order**

Part Number Configuration:

**PE3C4134**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C4134-12 = 12 inches long cable  
PE3C4134-100cm = 100 cm long cable

Plenum 4.1/9.5 Mini DIN Male to 7/16 DIN Male Low PIM Cable 100 CM Length Using SPP-250-LLPL Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum 4.1/9.5 Mini DIN Male to 7/16 DIN Male Low PIM Cable 100 CM Length Using SPP-250-LLPL Coax , LF Solder PE3C4134-100CM](#)


URL: <https://www.pasternack.com/4.1-9.5-mini-din-male-7-16male-spp250llpl-cable-assembly-pe3c4134-100cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C4134-100CM CAD Drawing

Plenum 4.1/9.5 Mini DIN Male to 7/16 DIN Male Low PIM Cable

100 CM Length Using SPP-250-LLPL Coax , LF Solder

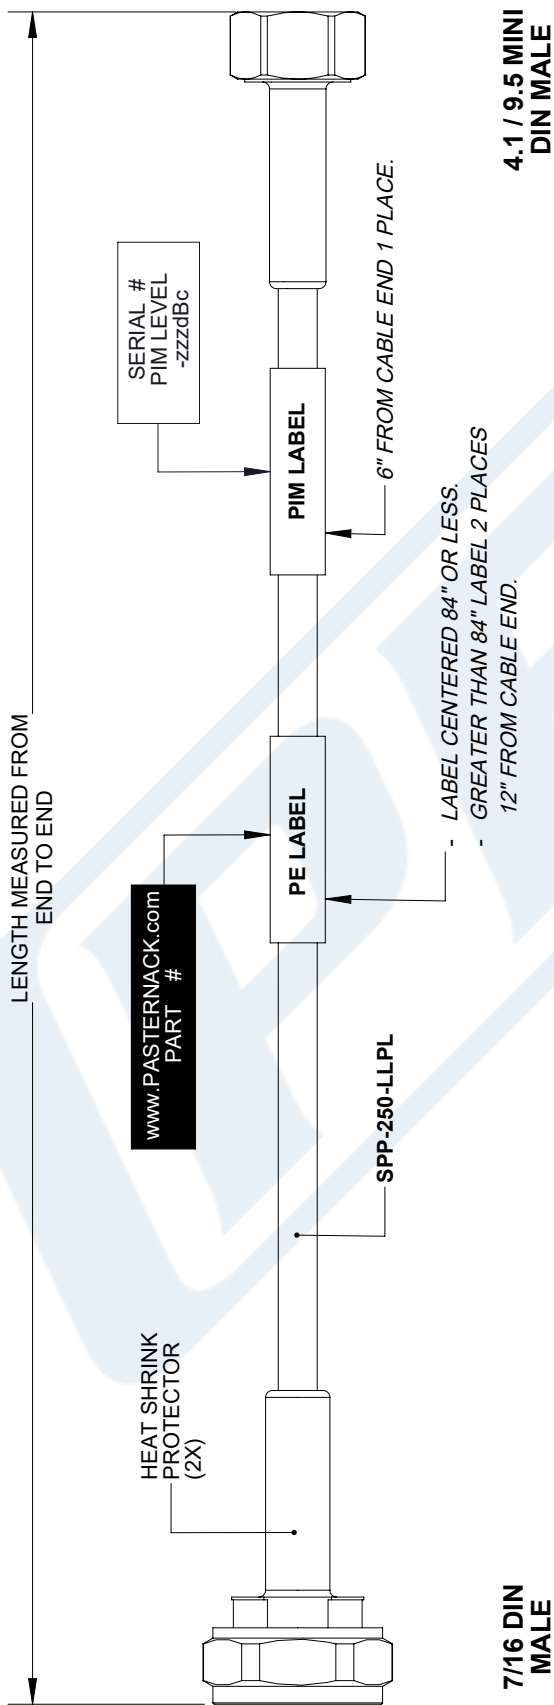

| STANDARD TOLERANCES |        |
|---------------------|--------|
| .X                  | ±0.2   |
| .XX                 | ±0.01  |
| .XXX                | ±0.005 |

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE3C4134

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE 12/05/18

SCALE N/A

SIZE A

7361