



5 Watt P1dB, 500 MHz to 2.8 GHz, High Power Amplifier,
SMA Input, SMA Output, 37 dB Gain, 52 dBm IP3

TECHNICAL DATA SHEET

PE15A5013

PE15A5013 is a 5W wideband high gain power coaxial amplifier operating in the 0.5 to 2.8 GHz frequency range. The amplifier offers 5 Watts typ of P1dB and high 37 dB typical small signal gain with the gain flatness of ± 2 dB typical. This excellent technical performance is achieved through the use of hybrid MIC design and advanced GaAs PHEMT devices. The driver amplifier requires typically a +12V DC power supply. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation, load VSWR protection, reverse bias protection, and thermal protection for added reliability. The amplifier operates over the temperature range of -10°C and +65°C.

Features

- 0.5 GHz to 2.8 GHz Frequency Range
- P1dB 37 dBm
- Small Signal Gain: 37 dB
- Gain Flatness: ± 2 typical
- 50 Ohms Input and Output Matched
- Unconditionally Stable
- Regulated Supply & Bias Sequencing
- Overvoltage Protection
- Thermal Protection

Applications

- Military Radar
- Commercial Air Traffic Control
- Weather & Earth Observation Satellites
- Radar & Communication Systems
- High Gain Driver Power Amplifier
- High Gain Output Power Amplifier

Electrical Specifications (TA = +25°C, DC Voltage = 12Volts, DC Current = 1.8A)

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.5		2.8	GHz
Small Signal Gain	36	37		dB
Gain Flatness		± 2		dB
Output Power at 1 dB Compression Point		+37		dBm
Output 3rd Intercept Point	+49	+52		dBm
Impedance (Input)		50		Ohms
Impedance (Output)		50		Ohms
Input Return Loss	-11	-14		dB
Operating DC Voltage		12		Volts
Operating DC Current			1.8	A
Operating Temperature Range	-10		+65	°C

Absolute Maximum Rating

Parameter	Rating	Units
Source Voltage	+12.5	Volts
RF input Power	+10	dBm
Operating Temperature (base-plate)	-10 to +65	°C
Storage Temperature	-55 to +100	°C



ESD Sensitive Material,
Transport material in
Approved ESD bags.
Handle only in approved
ESD Workstation.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Watt P1dB, 500 MHz to 2.8 GHz, High Power Amplifier, SMA Input, SMA Output, 37 dB Gain, 52 dBm IP3 PE15A5013](#)



5 Watt P1dB, 500 MHz to 2.8 GHz, High Power Amplifier,
SMA Input, SMA Output, 37 dB Gain, 52 dBm IP3

TECHNICAL DATA SHEET

PE15A5013

Mechanical Specifications

Size

Length	5 in [127 mm]
Width	2.5 in [63.5 mm]
Height	2.2 in [55.88 mm]
Weight	0.564 lbs [255.83 g]
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature

Operating Range	-10 to +65 deg C
Storage Range	-55 to +100 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.
- Heat Sink Required for Proper Operation, Unit is cooled by conduction to heat sink.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Watt P1dB, 500 MHz to 2.8 GHz, High Power Amplifier, SMA Input, SMA Output, 37 dB Gain, 52 dBm IP3 PE15A5013](#)



5 Watt P1dB, 500 MHz to 2.8 GHz, High Power Amplifier,
SMA Input, SMA Output, 37 dB Gain, 52 dBm IP3

TECHNICAL DATA SHEET

PE15A5013

Amplifier Power-up Precautions

- 1.) Confirm that proper ESD precautions and controls are always in place before handling any Amplifier module.
- 2.) Confirm adequate thermal management is in place to effectively dissipate heat away from the Amplifier package. The Amplifier operational baseplate temperature must be within the operational temperature range stated in the Amplifier datasheet. Depending on the design and thermal requirements, using a heatsink with cooling fan is always recommended for safe reliable operation. A heat sink without a cooling fan may also be used. Damage caused from overheating will void the warranty.
- 3.) Confirm adequate system grounding is established. The DC power supply and Amplifier must have a common ground in order to operate properly.
- 4.) Power Amplifiers may require additional DC Current when initially powered-up. Depending on the design, the input current draw could range from an additional 10% to 100% above the maximum rated DC current of the Amplifier. This varies based on product part number.
- 5.) Confirm the DC power supply, if limited, is set to allow for additional start-up current that's rated for the Power Amplifier.
- 6.) Confirm the system is designed and calibrated for 50 ohms. Any impedance mismatch may cause performance issues.
- 7.) Perform a CALIBRATION (if required) with the loads before connecting the Amplifier to the Network Analyzer to ensure proper performance.
- 8.) Use a fixed attenuator between the signal source and input port of the Amplifier to optimize the input VSWR match.
- 9.) Confirm the input power level at the input port of the amplifier does not exceed the maximum rated limit for input power (as stated in the Amplifier datasheet).
 P_{in} for Small Signal Gain = P1dB-SSG-10 dB
 P_{in} for P1dB = P1dB-SSG+1 dB
- 10.) Confirm the Network Analyzer is always connected to the Amplifier first before DC power is applied to the Amplifier.
- 11.) As long as the input and output ports of the amplifier are connected to a 50Ohm load and RF signal power is applied, the Amplifier can be powered up with DC voltage.
- 12.) Confirm the Amplifier output load is matched for a 50 Ohm impedance and will not exceed the maximum rated VSWR or Return Loss limit for the Amplifier. Exceeding the maximum rated VSWR or Return Loss limit will result in reflected signal power that could damage the Amplifier and void the warranty.
- 13.) **Power Amplifier connected to an Antenna for signal transmission** - It's strongly recommended to use a high power fixed attenuator pad or an Isolator between the output port of the Amplifier and input port to the antenna. Any reflected signal power due to impedance mismatch will likely damage the Amplifier and void the warranty.
- 14.) The attenuator or isolator used at the output port of the Amplifier must be rated to handle the output power level and operational frequency band of the amplifier.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Watt P1dB, 500 MHz to 2.8 GHz, High Power Amplifier, SMA Input, SMA Output, 37 dB Gain, 52 dBm IP3 PE15A5013](#)




5 Watt P1dB, 500 MHz to 2.8 GHz, High Power Amplifier,
SMA Input, SMA Output, 37 dB Gain, 52 dBm IP3

TECHNICAL DATA SHEET

PE15A5013

Typical Performance Data

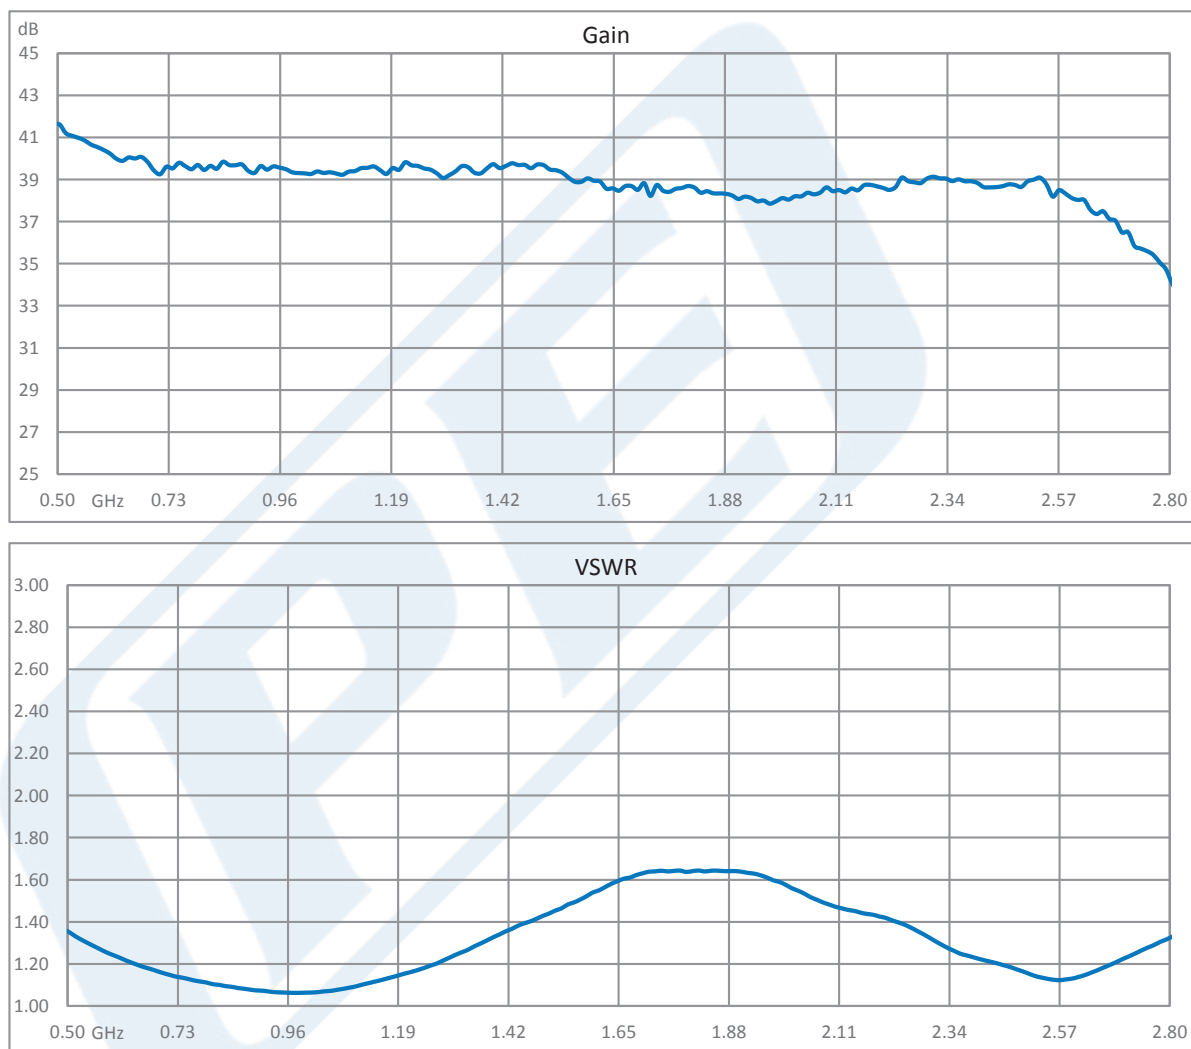


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Watt P1dB, 500 MHz to 2.8 GHz, High Power Amplifier, SMA Input, SMA Output, 37 dB Gain, 52 dBm IP3 PE15A5013](#)



5 Watt P1dB, 500 MHz to 2.8 GHz, High Power Amplifier,
SMA Input, SMA Output, 37 dB Gain, 52 dBm IP3

TECHNICAL DATA SHEET

PE15A5013

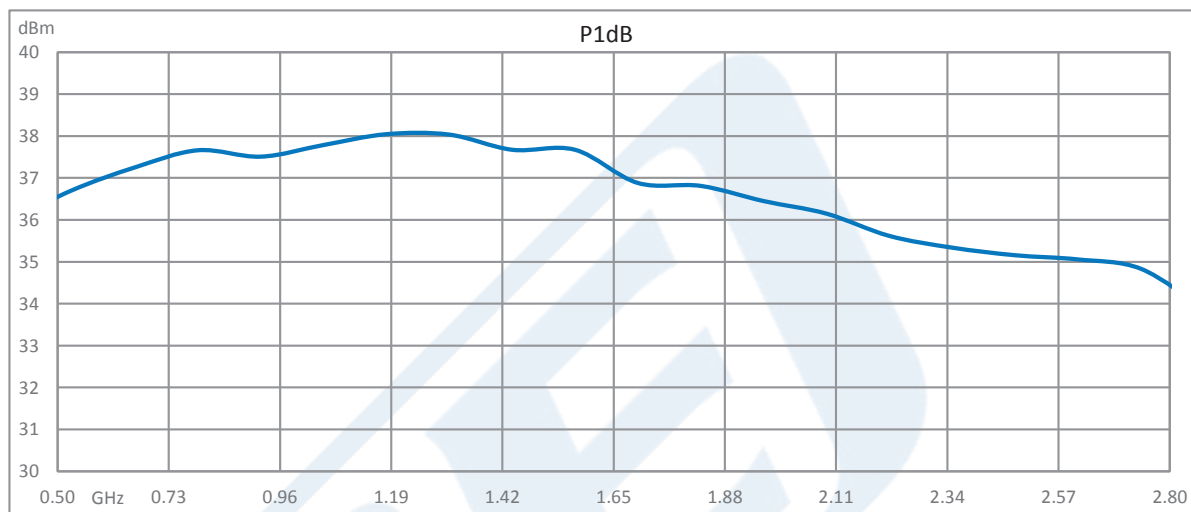

5 Watt P1dB, 500 MHz to 2.8 GHz, High Power Amplifier, SMA Input, SMA Output, 37 dB Gain, 52 dBm IP3 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Watt P1dB, 500 MHz to 2.8 GHz, High Power Amplifier, SMA Input, SMA Output, 37 dB Gain, 52 dBm IP3 PE15A5013](https://www.pasternack.com/2.8-ghz-high-power-amplifier-37-db-gain-52-dbm-ip3-sma-pe15a5013-p.aspx)

URL: <https://www.pasternack.com/2.8-ghz-high-power-amplifier-37-db-gain-52-dbm-ip3-sma-pe15a5013-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15A5013 CAD Drawing

5 Watt P1dB, 500 MHz to 2.8 GHz, High Power Amplifier,
SMA Input, SMA Output, 37 dB Gain, 52 dBm IP3

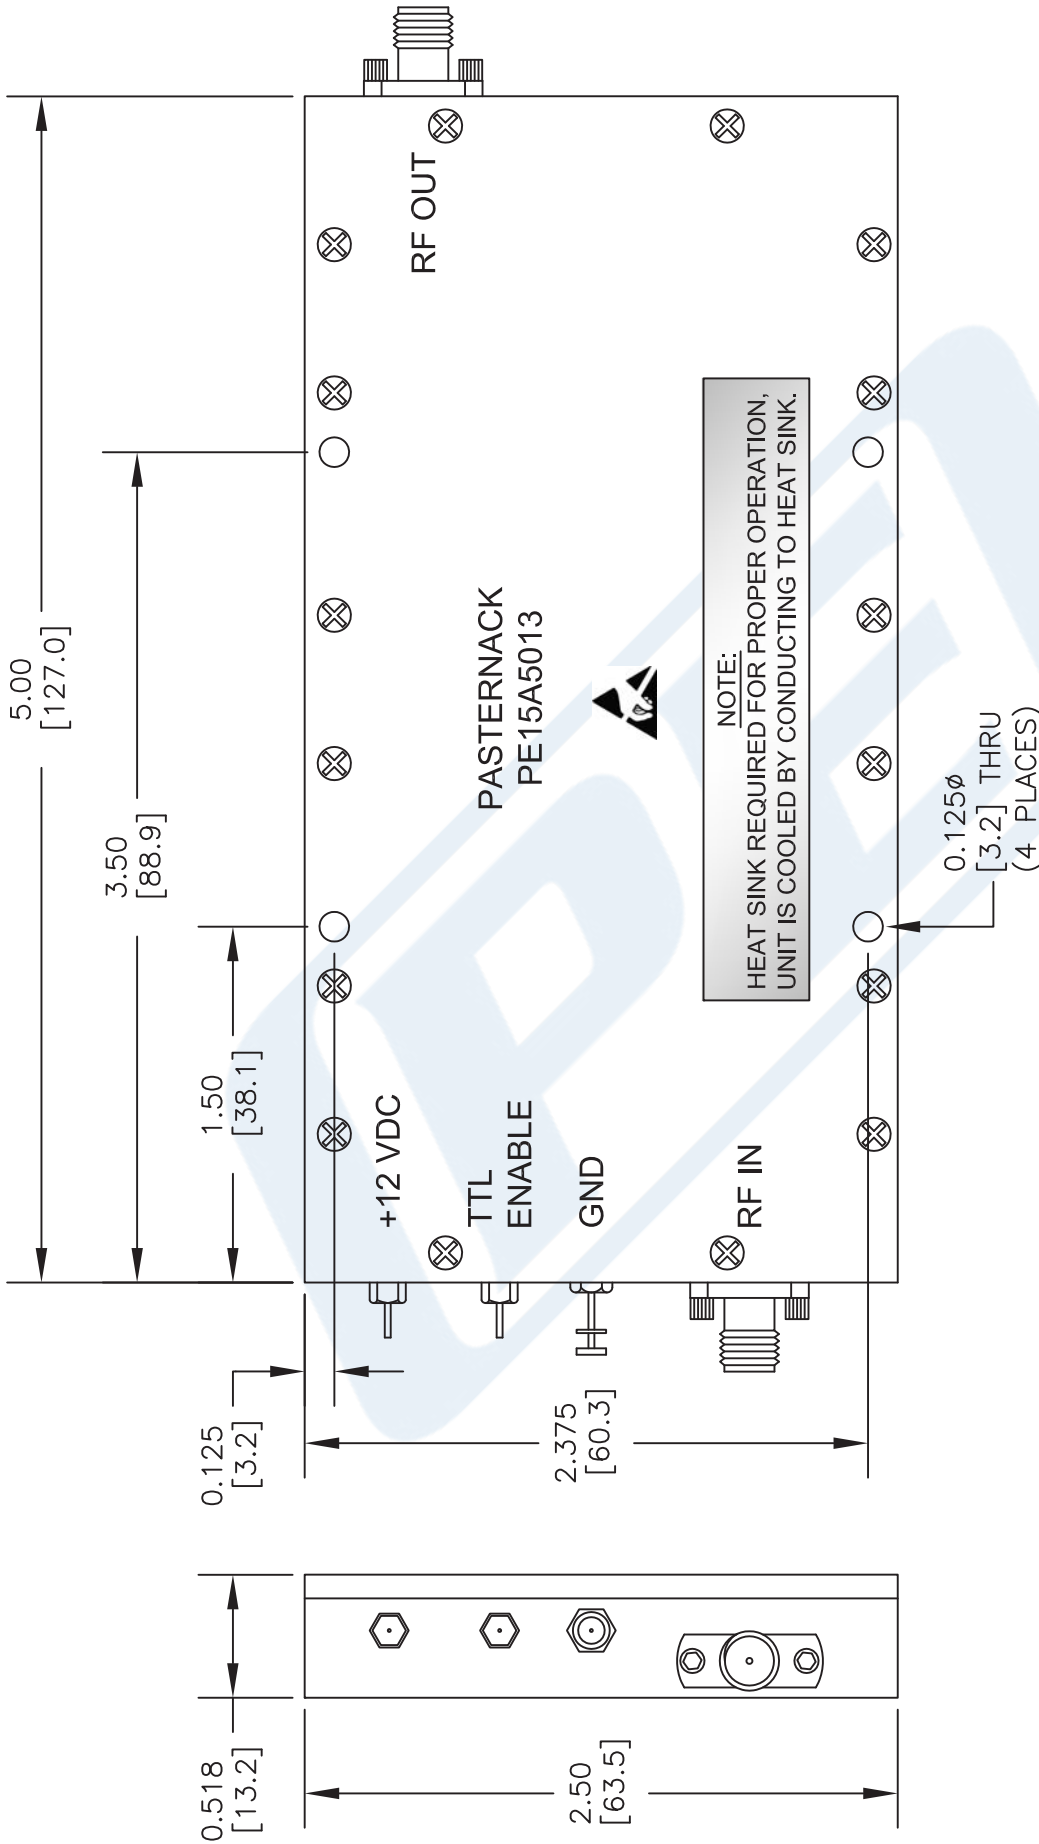

PIN	DESCRIPTION	SPECIFICATION
+VDC	DC Supply	+12VDC ± .5V *
TTL Enable	TTL On/Off	High=Enable, Low=Disable
GND	---	---
RF Input	---	+10 dBm Max.

* SPECIFIED OPERATION AT +12V, HOWEVER, UNIT CAN BE RUN FROM +9 VDC TO +14 VDC.

NOTE:
HEAT SINK REQUIRED FOR PROPER OPERATION,
UNIT IS COOLED BY CONDUCTING TO HEAT SINK.

DWG TITLE

PE15A5013

PE PASTERNAK
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 050114

SCALE N/A

SIZE A

150