



48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB

TECHNICAL DATA SHEET

PE15A5032F

The PE15A5032F is a high gain Class A/AB GaN Linear Power Amplifier operating in the 500 to 3000 MHz frequency range. The amplifier offers a Wide Dynamic Range with 50 Watts typical saturated power, 48 dB minimum small signal gain, and ± 2.0 dB gain flatness maximum. The amplifier requires typically a +36V DC power supply, is unconditionally stable, and operates over the temperature range of -20°C and +75°C. Pinouts include TTL Blanking, Remote ON/OFF, DC Current Monitoring, Reset, And Temperature Sensor Monitoring. RF Input/Output Connectors are SMA Female. The unit has a Heatsink and Fan.

Features

- 500 MHz to 3000 MHz Frequency Range
- Psat 50 Watts typ
- Small Signal Gain: 48 dB min
- Gain Flatness ± 2.0 dB max
- Class A/AB
- TTL Blanking
- Remote ON/OFF
- 50 Ohms Input and Output Matched
- Unconditionally Stable
- Regulated Supply
- RF Input Signal Format CW/AM/FM/PM/Pulse
- SMA Female RF Connectors
- Heatsink and Fan
- DC Current Monitoring
- Rest Control
- Temperature Sensor Monitoring

Applications

- Military Radio
- Communication Systems
- High Gain Driver Power Amplifier
- Medical Industry
- High Gain Output Power Amplifier

Electrical Specifications (TA = +25°C)

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.5		3	GHz
Small Signal Gain	48			dB
Gain Flatness			± 2	dB
Input Power (CW)			+0	dBm
Pout at Sat.	+46.5	+47		dBm
Output Power at 1 dB Compression Point		+44		dBm
Output Power at 1 dB Compression Point at OTR*	+43			dBm
Output 3rd Order Intercept Point		+52		dBm
Harmonics @20 Watts		-15		dBc
Spurious @20 Watts		-70	-60	dBc
Impedance (Input)		50		Ohms
Impedance (Output)		50		Ohms
Input VSWR			2:1	
TTL Control	"1": Off, "0": On (Blanking), Enable: 0V, Disable: 5V			
Operating DC Voltage	+28	+36	+42	Volts
Operating DC Current		8.333		A
DC Consumption			300	Watts
Operating Temperature Range	-20		+75	°C
Temperature Indication: Analog Voltage Reporting with LM 35 or Equivalent				

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB PE15A5032F](#)



48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN
Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB

TECHNICAL DATA SHEET

PE15A5032F

Current Indication: Analog Voltage Reporting

*OTR= Base Plate Operating Temperature Range

Mechanical Specifications

Size

Length	9.8 in [248.92 mm]
Width	9.744 in [247.5 mm]
Height	4.1 in [104.14 mm]
Weight	11.52 lbs [5.23 kg]
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature

Operating Range	-20 to +75 deg C
Humidity	95
Shock	MIL-STD-810F Method 516.5
Vibration	MIL-STD-810F Method 516.5
Altitude	10000

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB PE15A5032F](#)



48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN
Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB

TECHNICAL DATA SHEET

PE15A5032F

Amplifier Power-up Precautions

- 1.) Confirm that proper ESD precautions and controls are always in place before handling any Amplifier module.
- 2.) Confirm adequate thermal management is in place to effectively dissipate heat away from the Amplifier package. The Amplifier operational baseplate temperature must be within the operational temperature range stated in the Amplifier datasheet. Depending on the design and thermal requirements, using a heatsink with cooling fan is always recommended for safe reliable operation. A heat sink without a cooling fan may also be used. Damage caused from overheating will void the warranty.
- 3.) Confirm adequate system grounding is established. The DC power supply and Amplifier must have a common ground in order to operate properly.
- 4.) Power Amplifiers may require additional DC Current when initially powered-up. Depending on the design, the input current draw could range from an additional 10% to 100% above the maximum rated DC current of the Amplifier. This varies based on product part number.
- 5.) Confirm the DC power supply, if limited, is set to allow for additional start-up current that's rated for the Power Amplifier.
- 6.) Confirm the system is designed and calibrated for 50 ohms. Any impedance mismatch may cause performance issues.
- 7.) Perform a CALIBRATION (if required) with the loads before connecting the Amplifier to the Network Analyzer to ensure proper performance.
- 8.) Use a fixed attenuator between the signal source and input port of the Amplifier to optimize the input VSWR match.
- 9.) Confirm the input power level at the input port of the amplifier does not exceed the maximum rated limit for input power (as stated in the Amplifier datasheet).
 P_{in} for Small Signal Gain = P1dB-SSG-10 dB
 P_{in} for P1dB = P1dB-SSG+1 dB
- 10.) Confirm the Network Analyzer is always connected to the Amplifier first before DC power is applied to the Amplifier.
- 11.) As long as the input and output ports of the amplifier are connected to a 50Ohm load and RF signal power is applied, the Amplifier can be powered up with DC voltage.
- 12.) Confirm the Amplifier output load is matched for a 50 Ohm impedance and will not exceed the maximum rated VSWR or Return Loss limit for the Amplifier. Exceeding the maximum rated VSWR or Return Loss limit will result in reflected signal power that could damage the Amplifier and void the warranty.
- 13.) **Power Amplifier connected to an Antenna for signal transmission** - It's strongly recommended to use a high power fixed attenuator pad or an Isolator between the output port of the Amplifier and input port to the antenna. Any reflected signal power due to impedance mismatch will likely damage the Amplifier and void the warranty.
- 14.) The attenuator or isolator used at the output port of the Amplifier must be rated to handle the output power level and operational frequency band of the amplifier.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB PE15A5032F](#)



48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN
Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB

TECHNICAL DATA SHEET

PE15A5032F

Power Up Sequence

For Turn On:

1. Initially, NO RF INPUT
2. On/Off and Blanking Pins set to Ground (Logic 0). This will keep the module in the Disable and blanked condition (no amplification) during Voltage (+32VDC) turn on.
3. Turn the Voltage (+32VDC) on.
4. Turn on Voltage (TTL +5VDC or +3.3VDC) to On/Off and Blanking Pins. This will enable and un-blank the module (amplification).
5. Turn on the Signal Source (-25dBm) on the RF input.

For Turn Off:

1. Turn off the Signal Source on the RF input.
2. On/Off and Blanking Pins set to Ground (Logic 0). This will keep the module in the Disable and blanked condition (no amplification during Voltage (+32VDC) turn off.
3. Turn off the Voltage (+32VDC).

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB PE15A5032F](#)





48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB

TECHNICAL DATA SHEET

PE15A5032F

Typical Performance Data

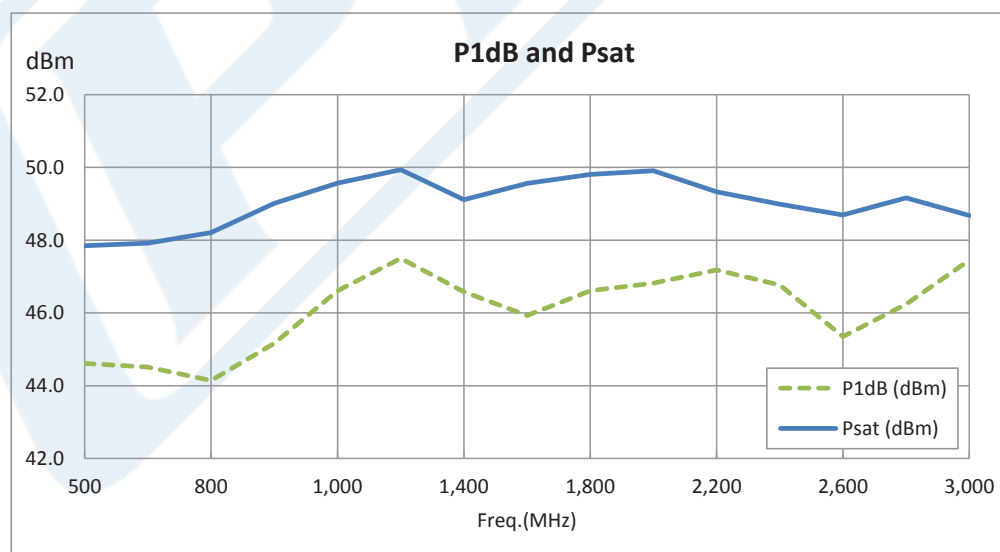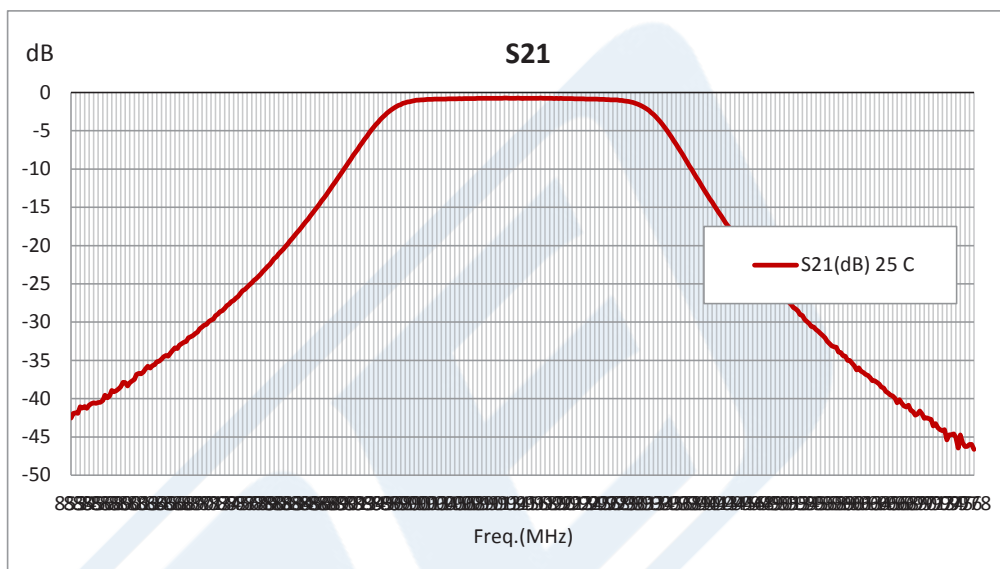



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB PE15A5032F](#)



48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB

TECHNICAL DATA SHEET

PE15A5032F

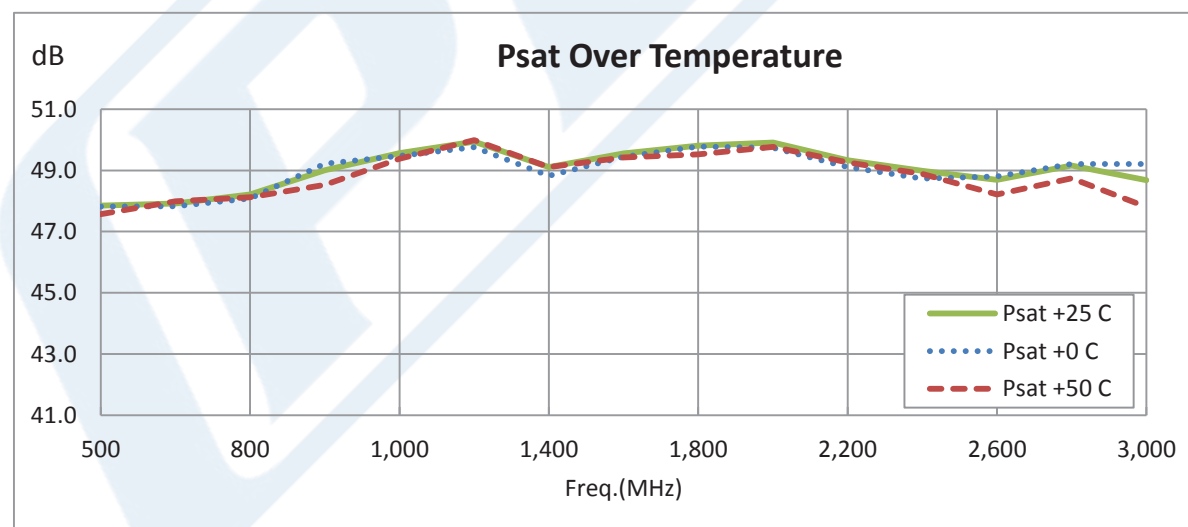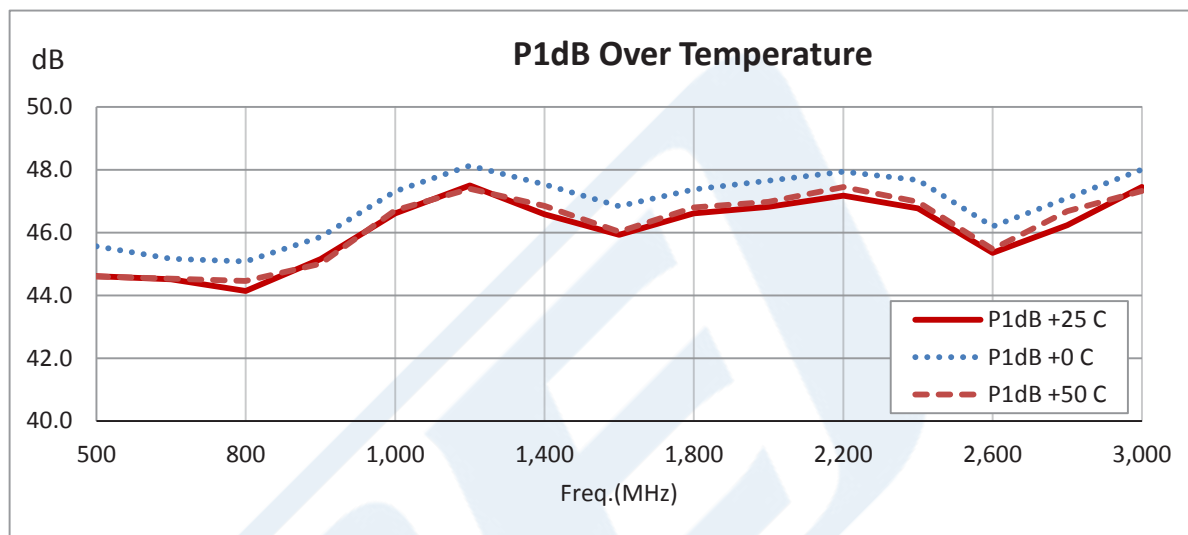



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB PE15A5032F](#)



48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB

TECHNICAL DATA SHEET

PE15A5032F

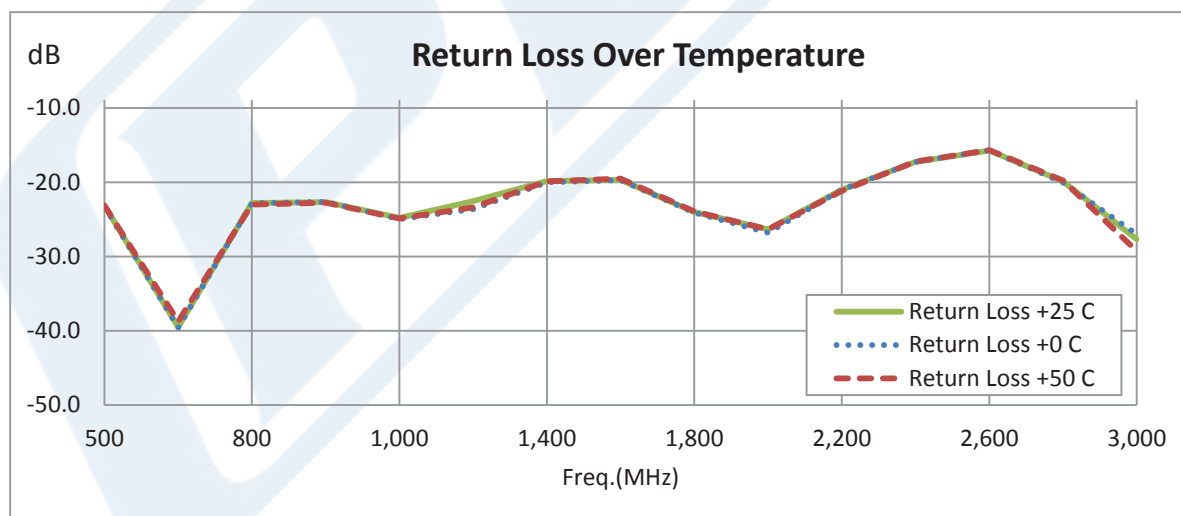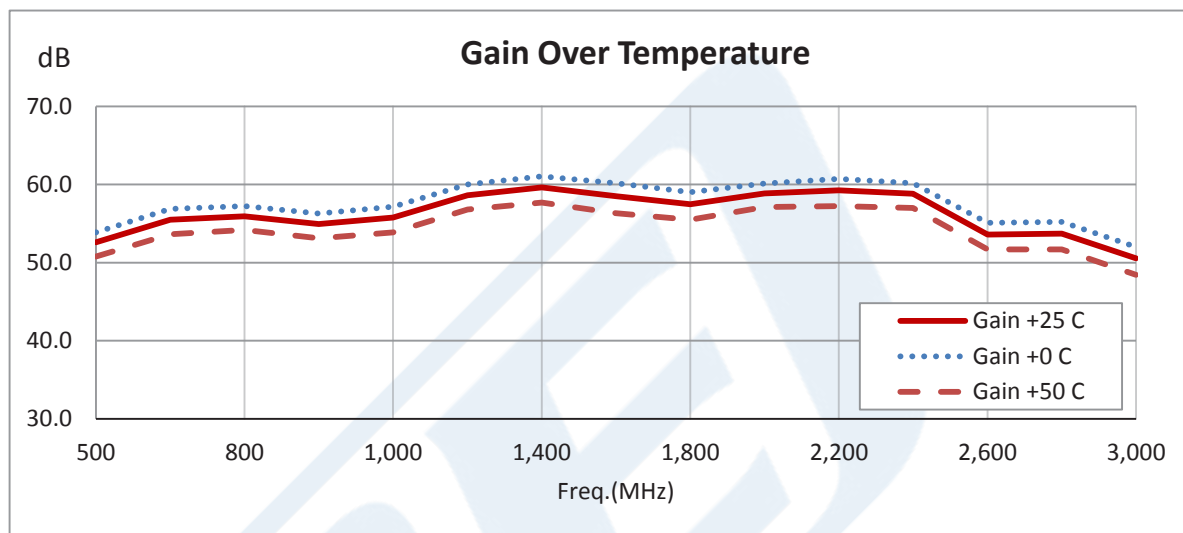

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB PE15A5032F](#)



48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN
Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB

TECHNICAL DATA SHEET

PE15A5032F

48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB PE15A5032F](https://www.pasternack.com/48-db-gain-3-ghz-high-power-high-gain-amplifier-sma-pe15a5032f-p.aspx)

URL: <https://www.pasternack.com/48-db-gain-3-ghz-high-power-high-gain-amplifier-sma-pe15a5032f-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15A5032F CAD Drawing

48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN
Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB

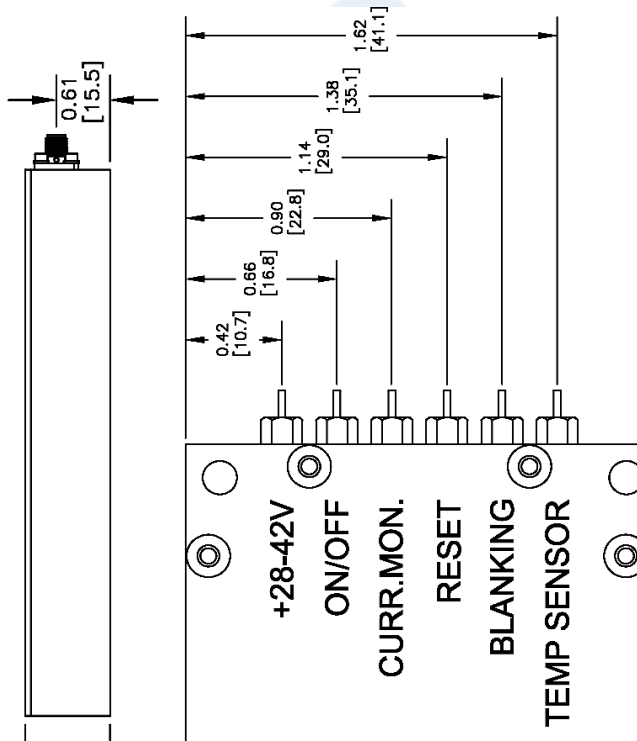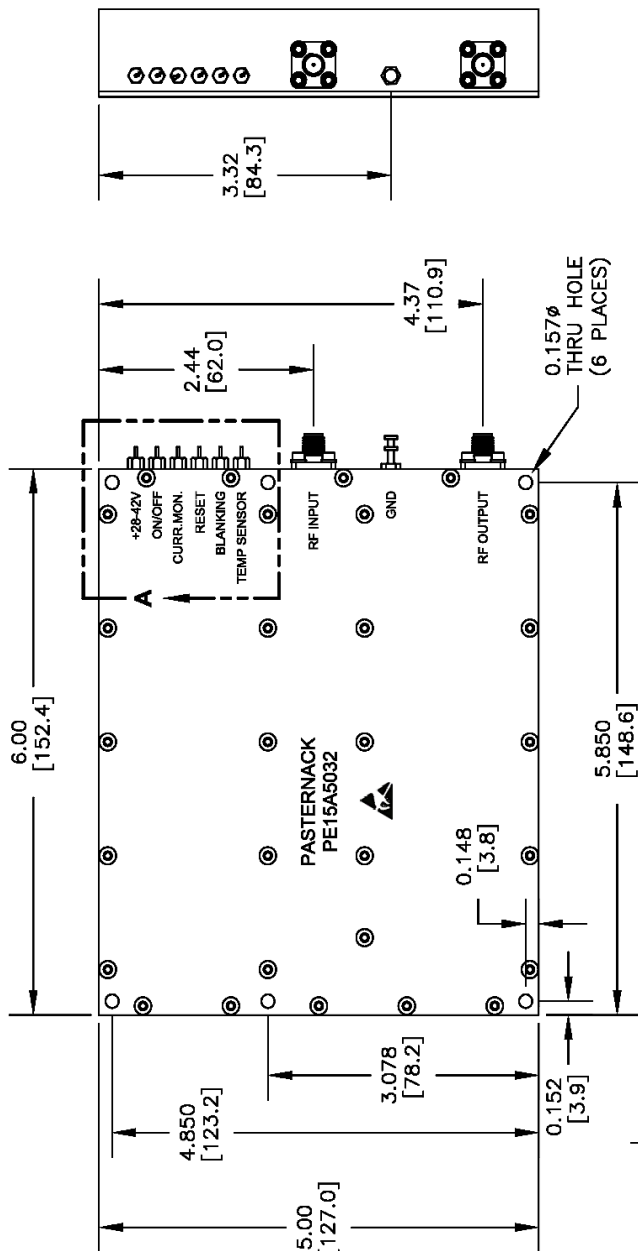

VIEW A

Parameter	Specification
DC Input	+28V to +42V
Remote ON/OFF (TTL Control)	0 VDC Disable 5 VDC Enable
Current Monitor	Analog Voltage
Reset	Connect pin to ground for 1 sec to reset fault
Blanking	0 VDC Enable 5 VDC Disable
Temp Sensor	Analog Voltage: 100mV per 10°C

STANDARD TOLERANCES
.X ±0.2
.XX ±0.01
.XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

PE PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com


DWG TITLE
PE15A5032F
CAGE CODE 53919

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE 100417
SCALE N/A
SIZE A
7361

PE15A5032F CAD Drawing

48 dB Gain, 50 Watt Psat, 500 MHz to 3 GHz, High Power GaN Amplifier, SMA Input, SMA Output, 52 dBm IP3, Class AB

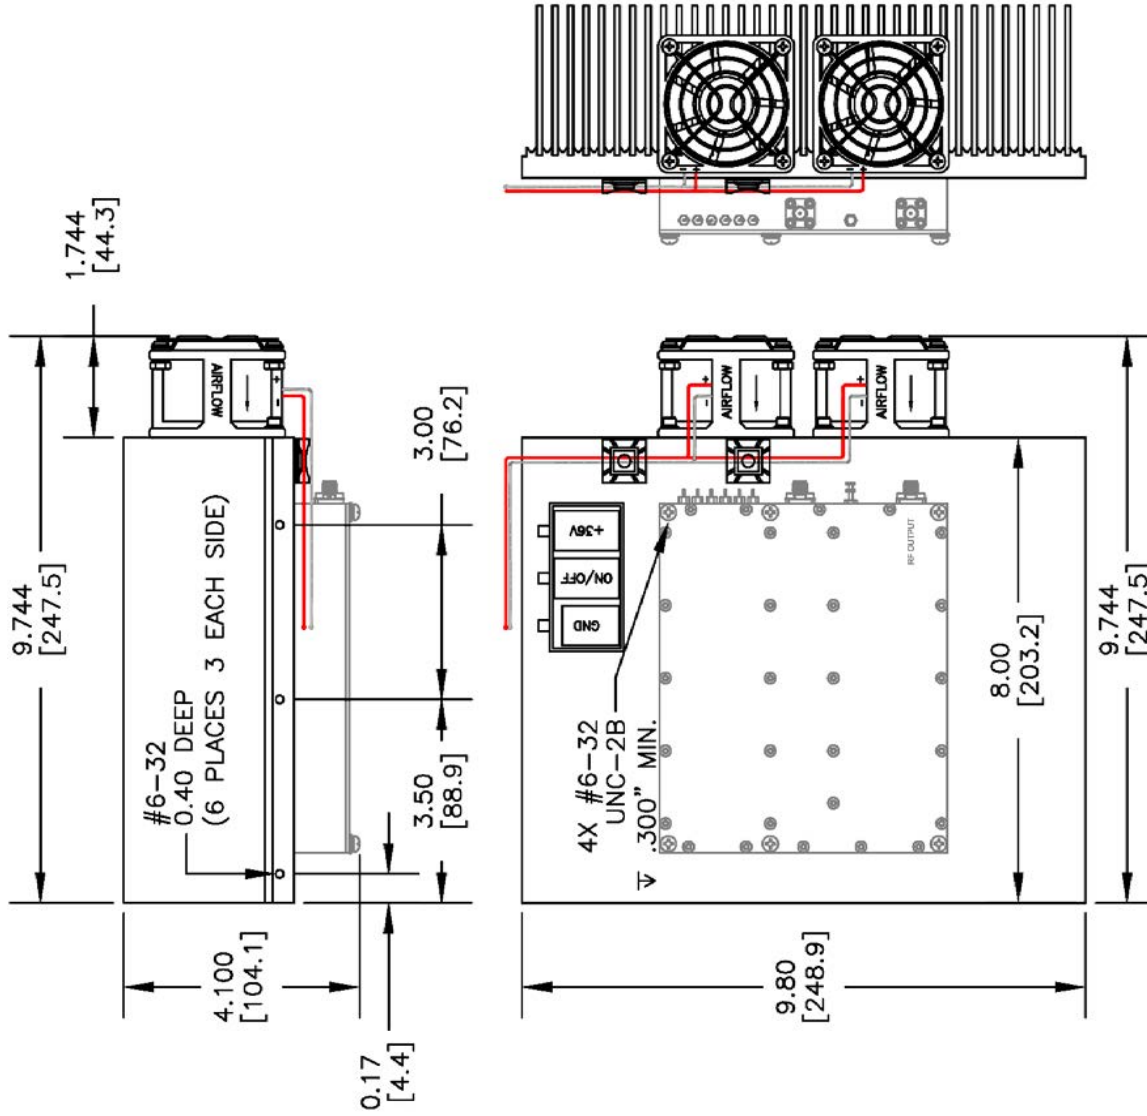

STANDARD TOLERANCES
.X ±0.2
.XX ±0.01
.XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE15A5032F

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE 100417

SCALE N/A

SIZE A

7361