



Blue FAKRA Plug to FAKRA Jack Right Angle Low
Loss Cable Using PE-C100-LSZH Coax

RF Cable Assemblies Technical Data Sheet

PE3C6038

Configuration

- Connector 1: FAKRA Plug
- Connector 2: FAKRA Jack Right Angle
- Cable Type: PE-C100-LSZH

Features

- Max Frequency 4 GHz
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- LSZH Jacket


Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C6038 blue FAKRA plug to FAKRA jack right angle cable using PE-C100-LSZH coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack FAKRA to FAKRA cable assembly has a plug to jack gender configuration with 50 ohm flexible PE-C100-LSZH coax. The PE3C6038 FAKRA plug to FAKRA jack cable assembly operates to 4 GHz. The right angle FAKRA interface on the PE-C100-LSZH cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

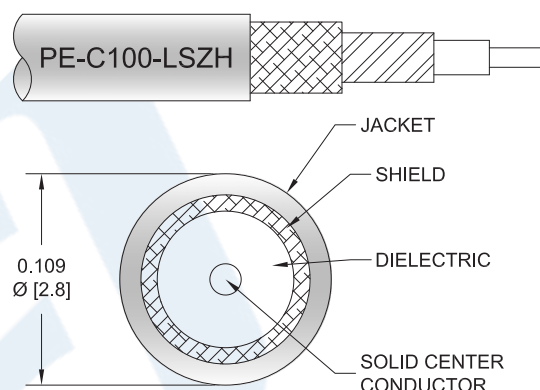

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Blue FAKRA Plug to FAKRA Jack Right Angle Low Loss Cable Using PE-C100-LSZH Coax PE3C6038](#)



Blue FAKRA Plug to FAKRA Jack Right Angle Low Loss Cable Using PE-C100-LSZH Coax

RF Cable Assemblies Technical Data Sheet

PE3C6038

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.62 [5.31]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		6 [19.69]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		2.5 [8.2]		Ω/1000ft [Ω/Km]
Jacket Spark			2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	4	GHz
Insertion Loss (Typ.)	0.059	0.115	0.166	0.24	0.508	dB/ft
	0.19	0.38	0.54	0.79	1.67	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2dB for the right angle connector and 0.1 dB for the straight connector.

Mechanical Specifications

Cable Assembly

Weight 0.026 lbs [11.79 g]

Cable

Cable Type	PE-C100-LSZH
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	LSZH, Black
Jacket Diameter	0.109 in [2.77 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Blue FAKRA Plug to FAKRA Jack Right Angle Low Loss Cable Using PE-C100-LSZH Coax PE3C6038](#)



Blue FAKRA Plug to FAKRA Jack Right Angle Low Loss Cable Using PE-C100-LSZH Coax

RF Cable Assemblies Technical Data Sheet

PE3C6038

One Time Minimum Bend Radius	0.25 in [6.35 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	15 lbs [6.8 Kg]

Connectors

Description	Connector 1	Connector 2
Type	FAKRA Plug	FAKRA Jack Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Phosphor Bronze, Gold	Phosphor Bronze, Gold
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Brass, Nickel	Brass, Nickel
Body Material and Plating	Plastic	Plastic

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Blue FAKRA Plug to FAKRA Jack Right Angle Low Loss Cable Using PE-C100-LSZH Coax PE3C6038](#)



Blue FAKRA Plug to FAKRA Jack Right Angle Low Loss Cable Using PE-C100-LSZH Coax

RF Cable Assemblies Technical Data Sheet

PE3C6038

How to Order

Part Number Configuration:

PE3C6038

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C6038-12 = 12 inches long cable
PE3C6038-100cm = 100 cm long cable

Blue FAKRA Plug to FAKRA Jack Right Angle Low Loss Cable Using PE-C100-LSZH Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Blue FAKRA Plug to FAKRA Jack Right Angle Low Loss Cable Using PE-C100-LSZH Coax PE3C6038](https://www.pasternack.com/fakra-plug-to-fakra-jack-right-angle-low-loss-cable-using-pe-c100-lszh-pe3c6038-p.aspx)

URL: <https://www.pasternack.com/fakra-plug-to-fakra-jack-low-loss-cable-using-pe-c100-lszh-pe3c6038-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C6038 CAD Drawing

Blue FAKRA Plug to FAKRA Jack Right Angle Low Loss Cable Using PE-C100-LSZH Coax

