

## SMA Male to BNC Male Cable Using RG316 Coax





### PE3W01705

#### Configuration

- Connector 1: SMA Male
- Connector 2: BNC Male
- Cable Type: RG316
- Coax Flex Type: Flexible

#### Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket

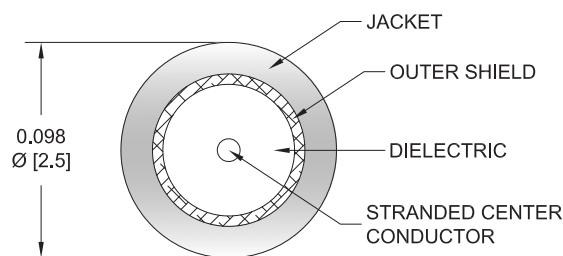

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W01705 SMA male to BNC male cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to BNC cable assembly has a male to male gender configuration with 50 ohm flexible RG316 coax. The PE3W01705 SMA male to BNC male cable assembly operates to 3 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR		1.4:1		
Velocity of Propagation		69		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
DC Resistance Inner Conductor		8.41 [27.59]		Ohms/1000ft [Ohms/Km]
Operating Voltage (AC)			335	Vrms
Jacket Spark			2,000	Vrms

#### Specifications by Frequency

## SMA Male to BNC Male Cable Using RG316 Coax



### PE3W01705

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	100	250	500	1000	3000	MHz	
PE3W01705	Custom Lengths Available	Insertion Loss (Typ.)	0.11	0.16	0.238	0.38	0.58	dB/ft	
			0.37	0.53	0.79	1.25	1.91	dB/m	
PE3W01705-12	12 inch	Insertion Loss (Typ.)	0.46	0.51	0.59	0.73	0.93	dB	0.047
PE3W01705-24	24 inch	Insertion Loss (Typ.)	0.57	0.67	0.83	1.11	1.51	dB	0.058
PE3W01705-36	36 inch	Insertion Loss (Typ.)	0.68	0.83	1.07	1.49	2.09	dB	0.068
PE3W01705-48	48 inch	Insertion Loss (Typ.)	0.79	0.99	1.31	1.87	2.67	dB	0.078
PE3W01705-72	72 inch	Insertion Loss (Typ.)	1.01	1.31	1.78	2.63	3.83	dB	0.098

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.25 dB

Loss due to Connector 2: 0.1 dB

Base Weight: 0.047 pounds

Additional Weight per Inch: 0.00084 pounds

## Mechanical Specifications

### Cable Assembly

Weight 0.047 lbs [21.32 g]

### Cable

Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.102 in [2.59 mm]

## SMA Male to BNC Male Cable Using RG316 Coax



PE3W01705

## Connectors

Description	Connector 1	Connector 2
Type	SMA Male	BNC Male
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	15 $\mu$ in minimum	50 $\mu$ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	200 $\mu$ in minimum	100 $\mu$ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	200 $\mu$ in minimum	100 $\mu$ in minimum

## Environmental Specifications

### Operating Range Temperature

-40 to +125 deg C

## Compliance Certifications (see [product page](#) for current document)


## Plotted and Other Data

## Notes:

## SMA Male to BNC Male Cable Using RG316 Coax

**PE3W01705****Typical Performance Data****How to Order**

Part Number Configuration:

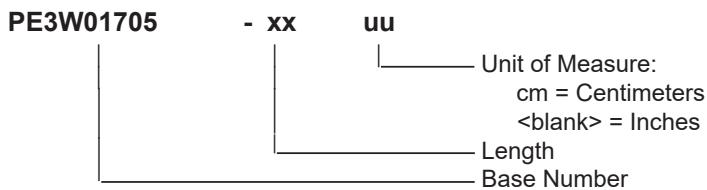

Example: PE3W01705-12 = 12 inches long cable  
PE3W01705-100cm = 100 cm long cable

SMA Male to BNC Male Cable Using RG316 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Male Cable Using RG316 Coax PE3W01705](#)

URL: <https://www.pasternack.com/sma-male-to-bnc-male-cable-using-rg316-pe3w01705-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W01705 CAD Drawing

## SMA Male to BNC Male Cable Using RG316 Coax

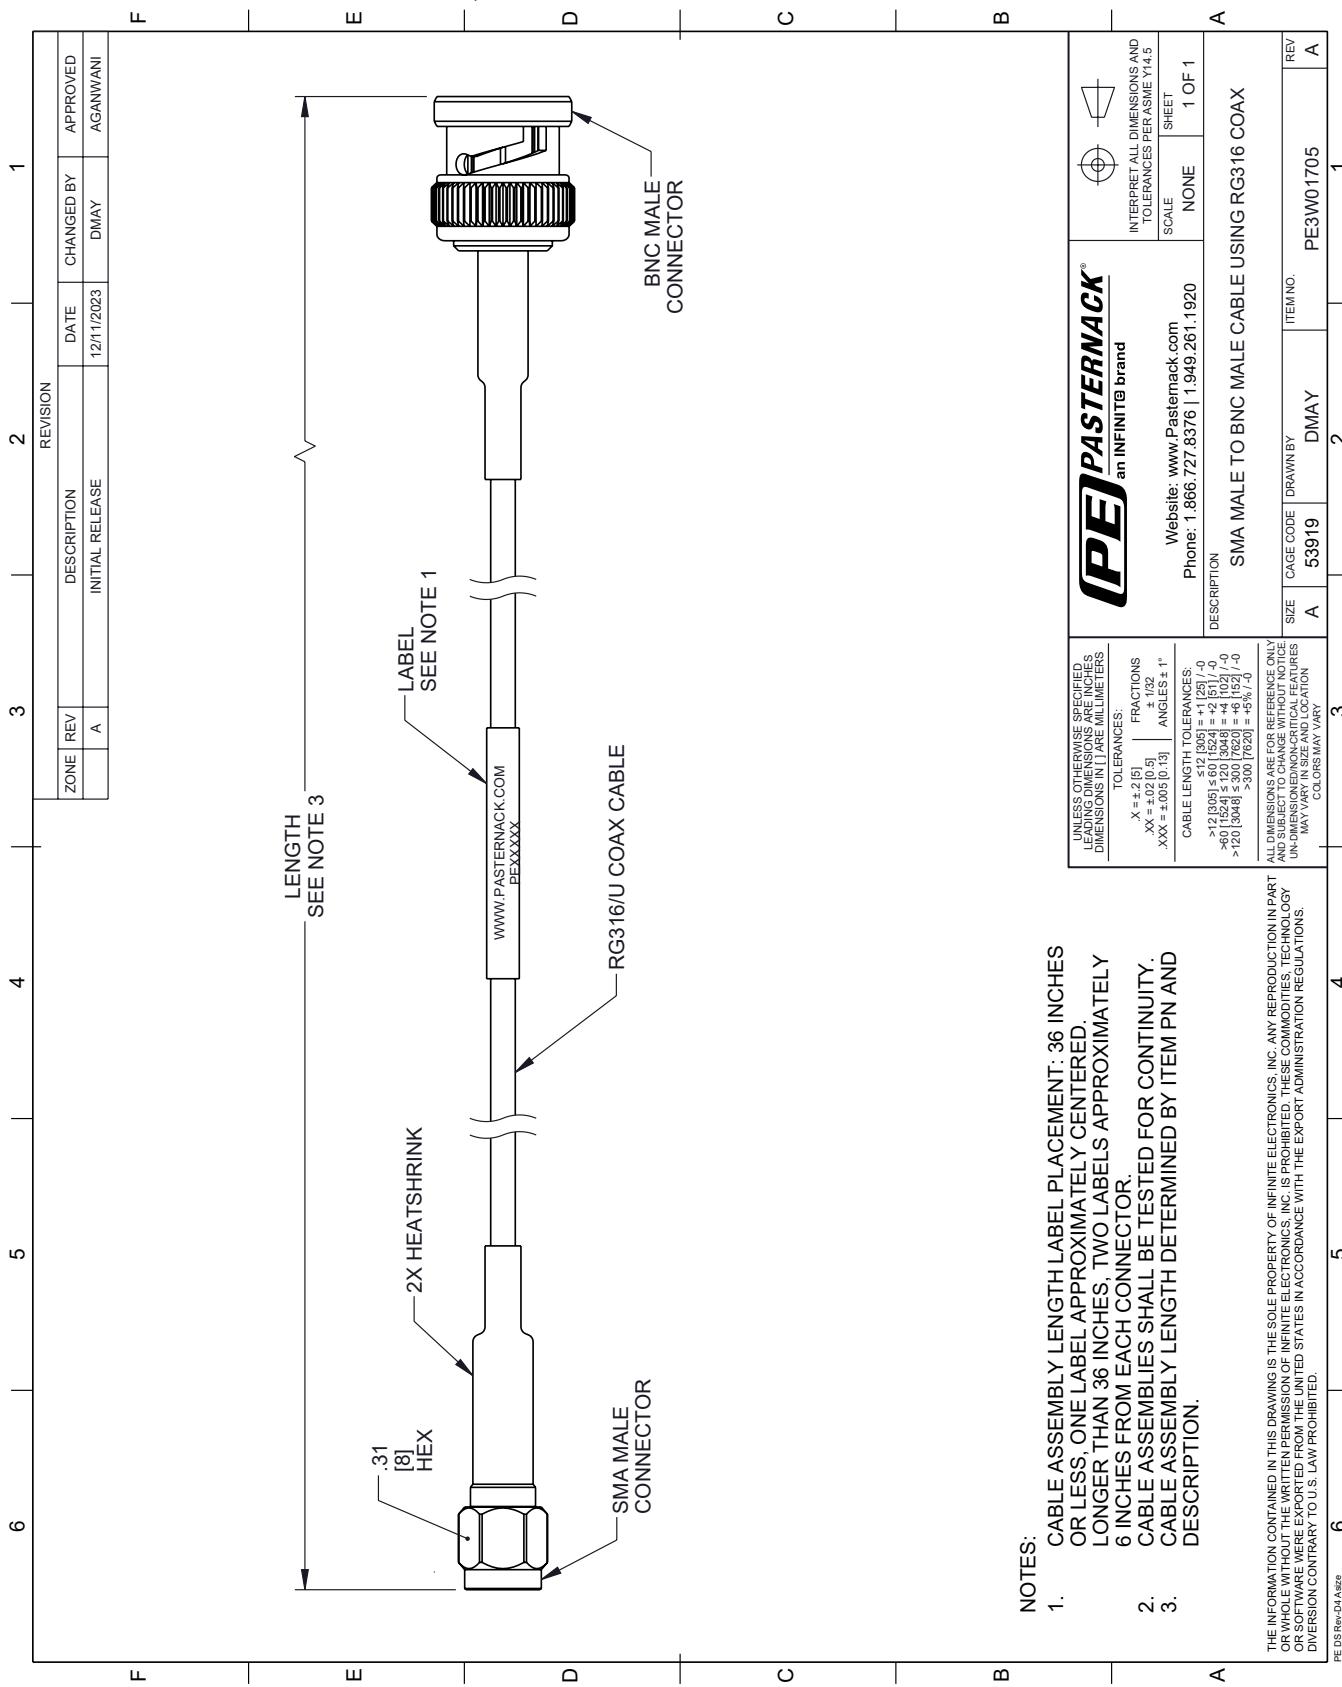

NOTES:  
1. CA  
OR  
LO  
6 IN  
CA  
CA  
2.  
3.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
AND SUBJECT TO CHANGE WITHOUT NOTICE.  
NON-DIMENSIONED/NON-CRITICAL FEATURES  
MAY VARY IN SIZE AND LOCATION  
COLORS MAY VARY

REV A 1705

© 2023 Infinite Electronics, Inc. Pasternack is a registered trademark of Infinite Electronics, Inc.

+1 (866) 558-2786 | sales@pasternack.com | [pasternack.com](http://pasternack.com)