



WR-62 UBR140 Flange to SMA Female Waveguide to Coax Adapter Operating from 11.9 GHz to 18 GHz in Brass

Waveguide to Coax Adapters Technical Data Sheet

PEWCA1098

Features

- 11.9 to 18 GHz Frequency Range
- WR-62 Waveguide Interface
- UBR140 Flange
- SMA Female RF Interface
- Comprehensive waveguide offering also include E-Bends, H-Bends, Sections, Filters, Terminations, Couplers, and more.

Applications

- Test Benches
- Radar
- Satellite
- Microwave Radio Systems
- Military and Space
- Communication Systems

Description

The PEWCA1098 is a right angle waveguide to coaxial adapter operating at a frequency range of 11.9 GHz to 18 GHz. This adapter offers a WR-62 waveguide interface size coupled with a precision tolerance UBR140 flange. The PEWCA1098 is constructed of brass and painted gray to ensure durability. The coaxial connector offered by this adapter uses an SMA Female connector.

Configuration

Waveguide Size	WR-62
Flange	UBR140
RF Connector	SMA Female
Body Geometry	Right Angle

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	11.9		18	GHz
VSWR			1.25:1	
Insertion Loss			0.2	dB
Input Power (CW)			50	Watts

Mechanical Specifications

Size	
Length	1.06 in [26.92 mm]
Width	1.31 in [33.27 mm]
Height	1.31 in [33.27 mm]

RF Connector	
Connector Type	SMA Female

Waveguide Interface	
Waveguide Type	WR-62

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-62 UBR140 Flange to SMA Female Waveguide to Coax Adapter Operating from 11.9 GHz to 18 GHz in Brass PEWCA1098](#)



WR-62 UBR140 Flange to SMA Female Waveguide to Coax
Adapter Operating from 11.9 GHz to 18 GHz in Brass

Waveguide to Coax Adapters Technical Data Sheet

PEWCA1098

Flange Type	UBR140
Body Material and Plating	Brass

Environmental Specifications

Temperature

Operating Range

-40 to +70 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level unless stated otherwise

WR-62 UBR140 Flange to SMA Female Waveguide to Coax Adapter Operating from 11.9 GHz to 18 GHz in Brass from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-62 UBR140 Flange to SMA Female Waveguide to Coax Adapter Operating from 11.9 GHz to 18 GHz in Brass PEWCA1098](#)

URL: <https://www.pasternack.com/wr62-ubr140-flange-to-sma-female-waveguide-coax-adapter-18-ghz-pewca1098-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEWCA1098 CAD Drawing

WR-62 UBR140 Flange to SMA Female Waveguide to Coax Adapter Operating from 11.9 GHz to 18 GHz in Brass

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/08/2020	SPONG

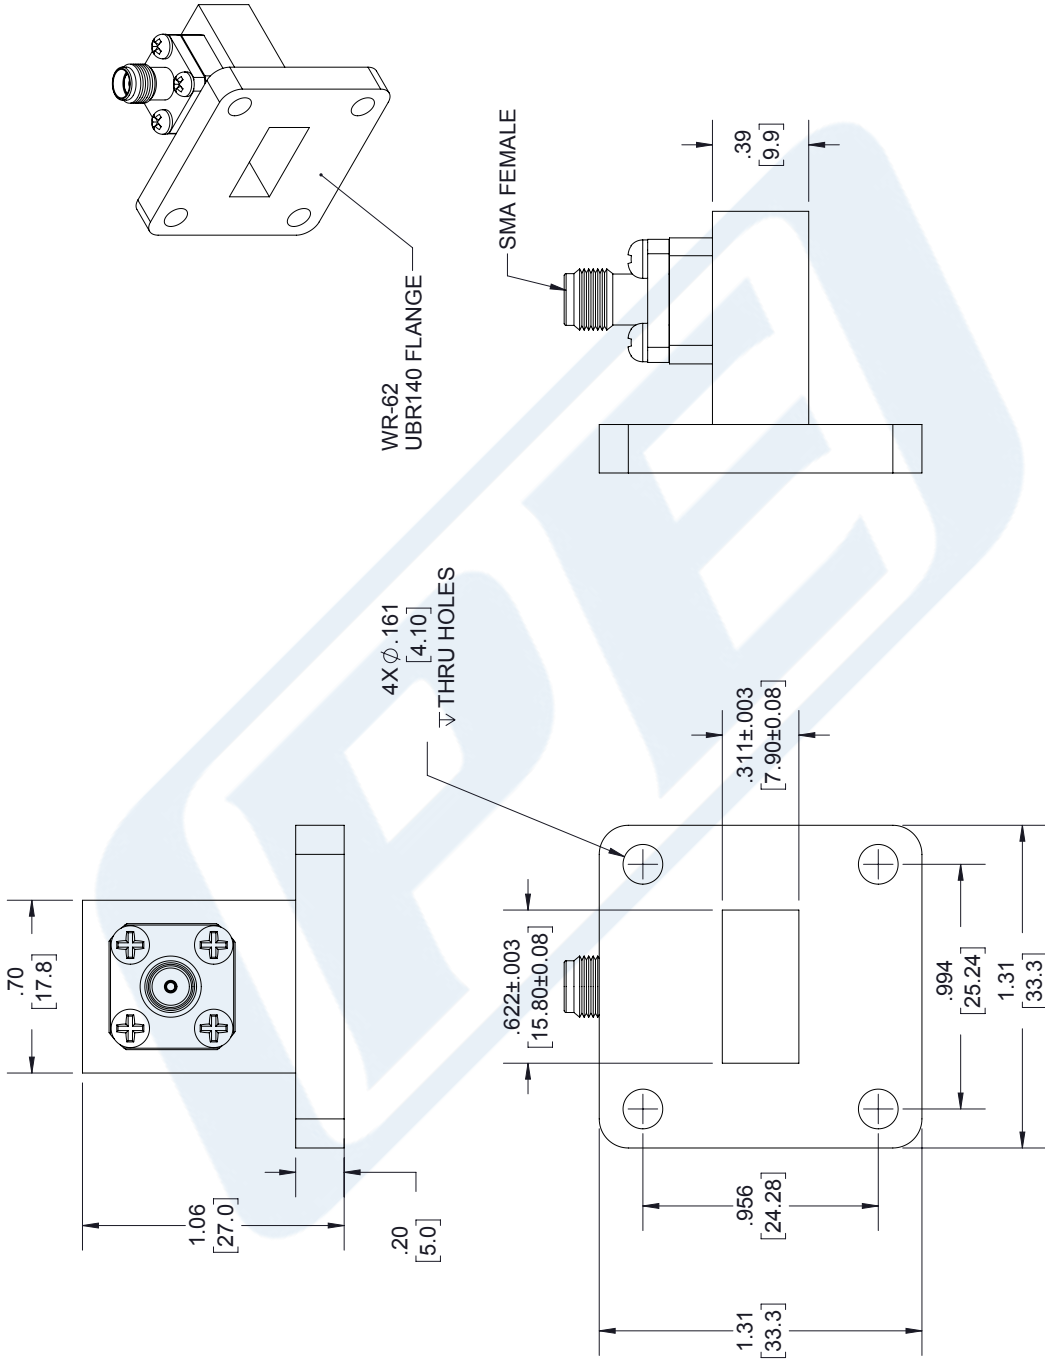

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A

ITEM NO PEWCA1098

DRAWN BY BPUCHASKI

CAGE CODE A

53919

PEWCA1098

REV A

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5.08] FRACTIONS ± 1/32

.XX = ±.02 [.51] ANGLES ± 1°

.XXX = ±.005 [.13] CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = +1 [25] / -0

12 [305] < L ≤ 60 [1524] = +2 [51] / -0

60 [1524] < L ≤ 120 [3048] = +4 [102] / -0

120 [3048] < L ≤ 300 [7620] = +6 [152] / -0

300 [7620] < L = +5% / L / -0

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

PASTERNAK an INFINITI® brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

LABEL:
PASTERNAK
PEWCA1098
D/C: YYWW

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.