



WR-34 UBR260 Flange to 2.92mm Female Waveguide to Coax Adapter Operating from 21.7 GHz to 33 GHz in Brass

Waveguide to Coax Adapters Technical Data Sheet

PEWCA1102

Features

- 21.7 to 33 GHz Frequency Range
- WR-34 Waveguide Interface
- UBR260 Flange
- 2.92mm Female RF Interface
- Comprehensive waveguide offering also include E-Bends, H-Bends, Sections, Filters, Terminations, Couplers, and more.

Applications

- Test Benches
- Radar
- Satellite
- Microwave Radio Systems
- Military and Space
- Communication Systems

Description

The PEWCA1102 is a right angle waveguide to coaxial adapter operating at a frequency range of 21.7 GHz to 33 GHz. This adapter offers a WR-34 waveguide interface size coupled with a precision tolerance UBR260 flange. The PEWCA1102 is constructed of brass and a gold finish to ensure durability. The coaxial connector offered by this adapter uses an 2.92mm Female connector.

Configuration

Waveguide Size	WR-34
Flange	UBR260
RF Connector	2.92mm Female
Body Geometry	Right Angle

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	21.7		33	GHz
VSWR			1.35:1	
Insertion Loss			0.3	dB
Input Power (CW)			20	Watts

Mechanical Specifications

Size	
Length	1.18 in [29.97 mm]
Width	0.87 in [22.1 mm]
Height	0.87 in [22.1 mm]

RF Connector	
Connector Type	2.92mm Female

Waveguide Interface	
Waveguide Type	WR-34

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-34 UBR260 Flange to 2.92mm Female Waveguide to Coax Adapter Operating from 21.7 GHz to 33 GHz in Brass PEWCA1102](#)



WR-34 UBR260 Flange to 2.92mm Female Waveguide to Coax Adapter Operating from 21.7 GHz to 33 GHz in Brass

Waveguide to Coax Adapters Technical Data Sheet

PEWCA1102

Flange Type	UBR260
Body Material and Plating	Brass

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level unless stated otherwise

WR-34 UBR260 Flange to 2.92mm Female Waveguide to Coax Adapter Operating from 21.7 GHz to 33 GHz in Brass from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-34 UBR260 Flange to 2.92mm Female Waveguide to Coax Adapter Operating from 21.7 GHz to 33 GHz in Brass PEWCA1102](#)


URL: <https://www.pasternack.com/wr34-ubr260-flange-to-2.92mm-female-waveguide-coax-adapter-33-ghz-pewca1102-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEWCA1102 CAD Drawing

WR-34 UBR260 Flange to 2.92mm Female Waveguide to Coax Adapter Operating from 21.7 GHz to 33 GHz in Brass

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	05/13/2020
		APPROVED
		SPONG

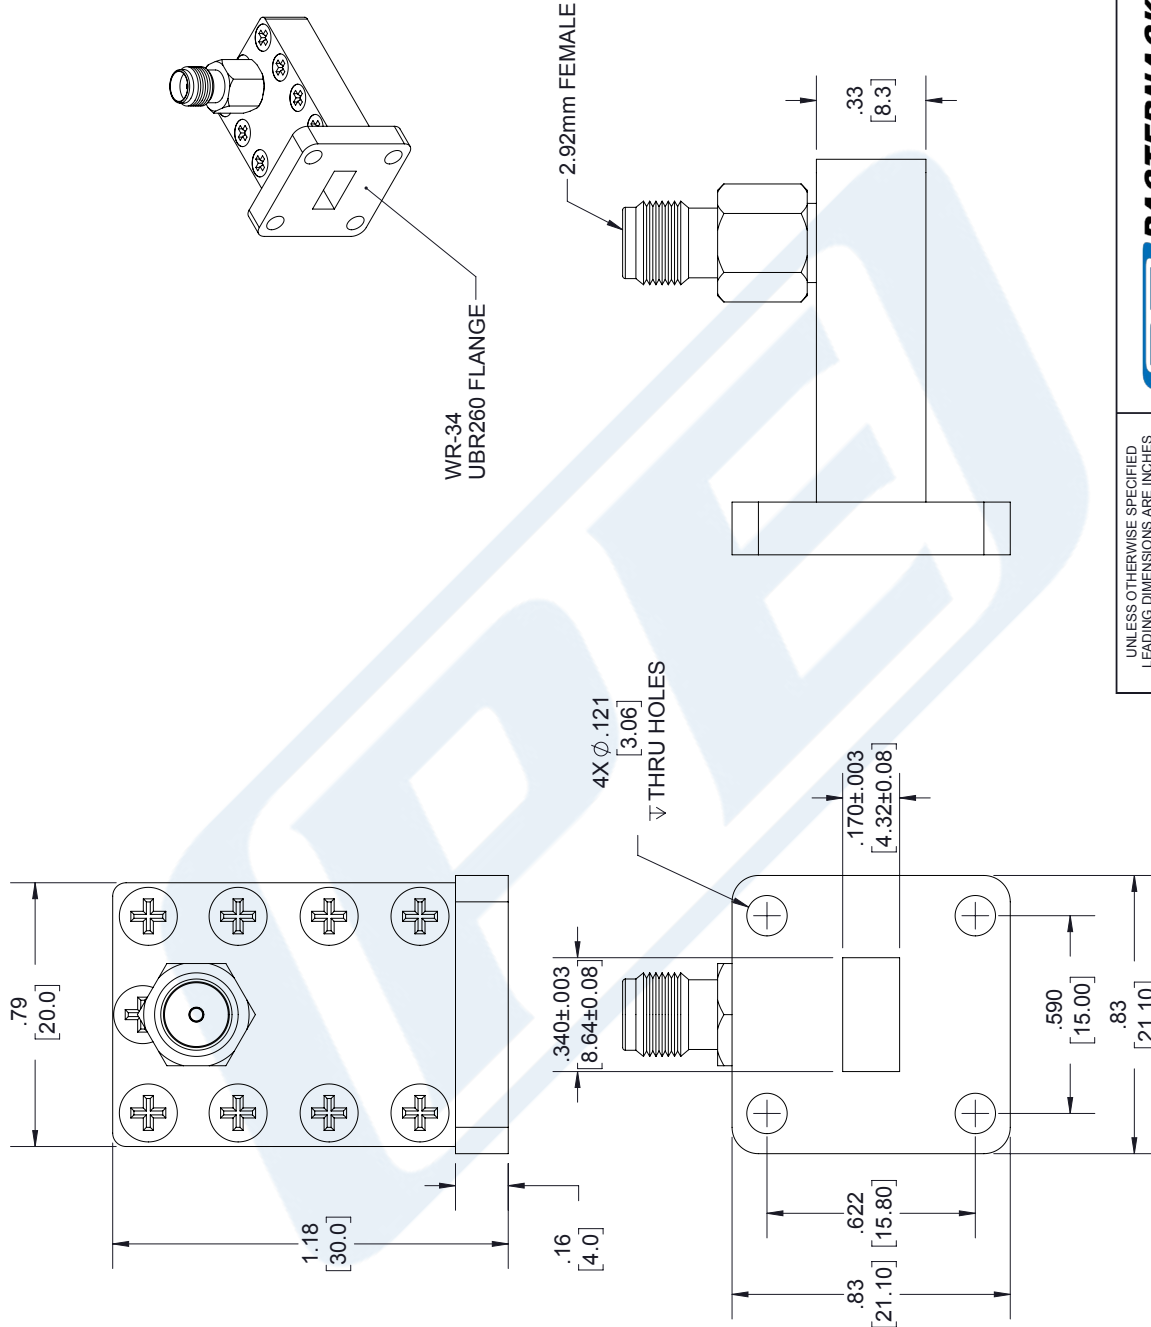

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

FRACTIONS: .X = ±.2 [5.08] ± 1/32
 .XX = ±.02 [.51] ± .005 [.13]
 .XXX = ±.005 [.13]

ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:
 L ≤ 12 [305] = +1 [25] / -0
 12 [305] < L ≤ 60 [1524] = +2 [51] / -0
 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0
 300 [7620] < L = +5% / L / -0

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A

ITEM NO PEWCA1102

DRAWN BY BPUCHASKI

CAGE CODE A

53919

SALES@PASTERNAK.COM

1.949.261.7451

1.866.727.8376

P.O. Box 16759, Irvine, CA 92623.

Pasternack Enterprises, Inc.

an INFINITI® brand

PASTERNAK

LABEL:
 PASTERNAK
 PEWCA1102
 D/C: YYWW

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.