

BMA Jack Right Angle Connector Solder Attachment 2 Hole Flange Mount for PECK007, PECK008, PE-SR402AL, PE-SR402FL, PE-SR402FLJ, RG402



PE5157

Configuration

- BMA Jack Connector
- 50 Ohms
- Right Angle Body Geometry
- Connector Interface Types: PECK007, PECK008, PE-SR402AL, PE-SR402FL, PE-SR402FLJ, RG402, RG402 Tinned
- 2 Hole Flange

Features

- Max. Operating Frequency 8 GHz
- Excellent VSWR of 1.2:1
- Gold over Nickel over Copper Plated Brass Contact
- Blind Mate Connector

Applications

- General Purpose Test
- Rack and Panel Mount Applications
- Custom Cable Assemblies

Description

Pasternack's PE5157 Right Angle, BMA, Standard, Connector is part of our full line of RF components available for same-day shipping. Our BMA jack connector operates up to a maximum frequency of 8 GHz and offers excellent VSWR of 1.2:1. The Pasternack blind mate connector is ideal for applications where direct visual or tactile access to the connection point is not possible, for example, when two circuit boards need to be mated. Its right angle body geometry allows for easier connections in tight spaces. This BMA 2 hole flange connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our BMA jack right angle 2 hole flange connector PE5157 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.2:1	
Insertion Loss		0.084		dB
Operating Voltage (AC)		1,000		Vrms
Dielectric Withstanding Voltage (AC)		1,500		Vrms
Inner Conductor DC Resistance		2		mOhms
Outer Conductor DC Resistance		2		mOhms
Insulation Resistance	5,000			MOhms
Impedance	50			Ohms

Mechanical Specifications

Size

Length	0.866 in [22 mm]
Width	0.748 in [19 mm]
Height	0.748 in [19 mm]
Weight	0.024 lbs [10.89 g]

BMA Jack Right Angle Connector Solder Attachment
 2 Hole Flange Mount for PECX007, PECX008, PE-SR402AL, PE-SR402FL, PE-SR402FLJ, RG402



PE5157

Material Specifications

Description	Material	Plating
Contact	Brass	Gold over Nickel over Copper
Contact Spring	Stainless Steel	
Insulation	PTFE	
Body	Brass	Gold over Nickel over Copper

Environmental Specifications

Temperature

Operating Range

-40 to +165 deg C

Humidity

MIL-STD-202, Method 106

Thermal Shock

MIL-STD-202, Method 107, Condition B

Salt Spray

MIL-STD-202, Method 101, Condition B

Compliance Certifications

(see product page for current document)

Plotted and Other Data

Notes:

BMA Jack Right Angle Connector Solder Attachment 2 Hole Flange Mount for PECX007, PECX008, PE-SR402AL, PE-SR402FL, PE-SR402FLJ, RG402 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BMA Jack Right Angle Connector Solder Attachment 2 Hole Flange Mount for PECX007, PECX008, PE-SR402AL, PE-SR402FL, PE-SR402FLJ, RG402 PE5157](#)

URL: <https://www.pasternack.com/bma-jack-pecx007-pecx008-pe-sr402fl-pe-sr402flj-rg402-connector-pe5157.html>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE5157 CAD Drawing

BMA Jack Right Angle Connector Solder Attachment 2 Hole Flange Mount for
PECX007, PECX008, PE-SR402AL, PE-SR402FL, PE-SR402FLJ, RG402

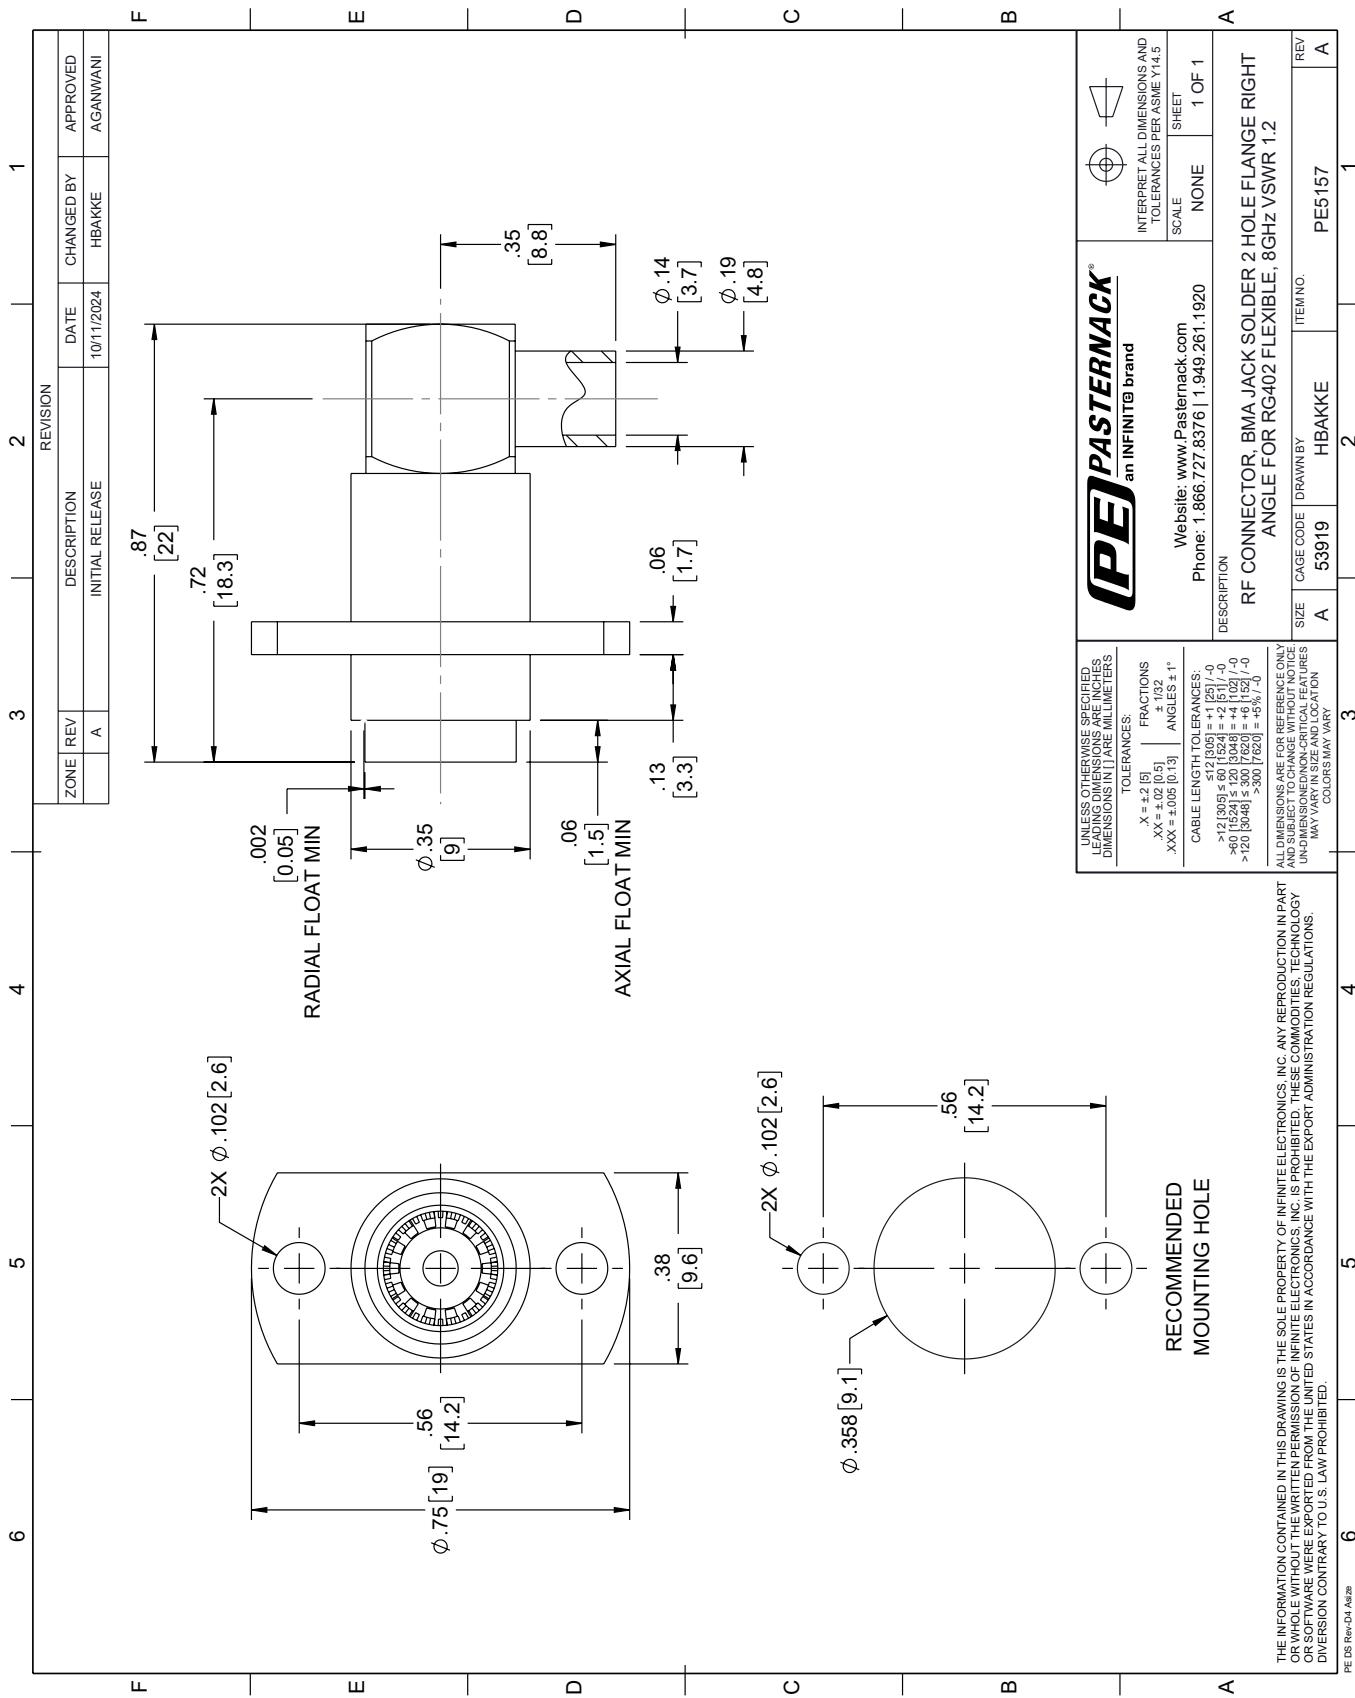

BMA Jack Right Angle Connector Solder Attachment 2 Hole Flange Mount for PECK007, PECK008, PE-SR402AL, PE-SR402FL, PE-SR402FLJ, RG402



PE5157

Configuration

- BMA Jack Connector
- 50 Ohms
- Right Angle Body Geometry
- Connector Interface Types: PECK007, PECK008, PE-SR402AL, PE-SR402FL, PE-SR402FLJ, RG402, RG402 Tinned
- 2 Hole Flange

Features

- Max. Operating Frequency 8 GHz
- Excellent VSWR of 1.2:1
- Gold over Nickel over Copper Plated Brass Contact
- Blind Mate Connector

Applications

- General Purpose Test
- Rack and Panel Mount Applications
- Custom Cable Assemblies

Description

Pasternack's PE5157 Right Angle, BMA, Standard, Connector is part of our full line of RF components available for same-day shipping. Our BMA jack connector operates up to a maximum frequency of 8 GHz and offers excellent VSWR of 1.2:1. The Pasternack blind mate connector is ideal for applications where direct visual or tactile access to the connection point is not possible, for example, when two circuit boards need to be mated. Its right angle body geometry allows for easier connections in tight spaces. This BMA 2 hole flange connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our BMA jack right angle 2 hole flange connector PE5157 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.2:1	
Insertion Loss		0.084		dB
Operating Voltage (AC)		1,000		Vrms
Dielectric Withstanding Voltage (AC)		1,500		Vrms
Inner Conductor DC Resistance		2		mOhms
Outer Conductor DC Resistance		2		mOhms
Insulation Resistance	5,000			MOhms
Impedance	50			Ohms

Mechanical Specifications

Size

Length	0.866 in [22 mm]
Width	0.748 in [19 mm]
Height	0.748 in [19 mm]
Weight	0.024 lbs [10.89 g]

BMA Jack Right Angle Connector Solder Attachment
 2 Hole Flange Mount for PECX007, PECX008, PE-SR402AL, PE-SR402FL, PE-SR402FLJ, RG402



PE5157

Material Specifications

Description	Material	Plating
Contact	Brass	Gold over Nickel over Copper
Contact Spring	Stainless Steel	
Insulation	PTFE	
Body	Brass	Gold over Nickel over Copper

Environmental Specifications

Temperature

Operating Range

-40 to +165 deg C

Humidity

MIL-STD-202, Method 106

Thermal Shock

MIL-STD-202, Method 107, Condition B

Salt Spray

MIL-STD-202, Method 101, Condition B

Compliance Certifications

(see product page for current document)

Plotted and Other Data

Notes:

BMA Jack Right Angle Connector Solder Attachment 2 Hole Flange Mount for PECX007, PECX008, PE-SR402AL, PE-SR402FL, PE-SR402FLJ, RG402 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BMA Jack Right Angle Connector Solder Attachment 2 Hole Flange Mount for PECX007, PECX008, PE-SR402AL, PE-SR402FL, PE-SR402FLJ, RG402 PE5157](#)

URL: <https://www.pasternack.com/bma-jack-pecx007-pecx008-pe-sr402fl-pe-sr402flj-rg402-connector-pe5157.html>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE5157 CAD Drawing

BMA Jack Right Angle Connector Solder Attachment 2 Hole Flange Mount for
PECX007, PECX008, PE-SR402AL, PE-SR402FL, PE-SR402FLJ, RG402

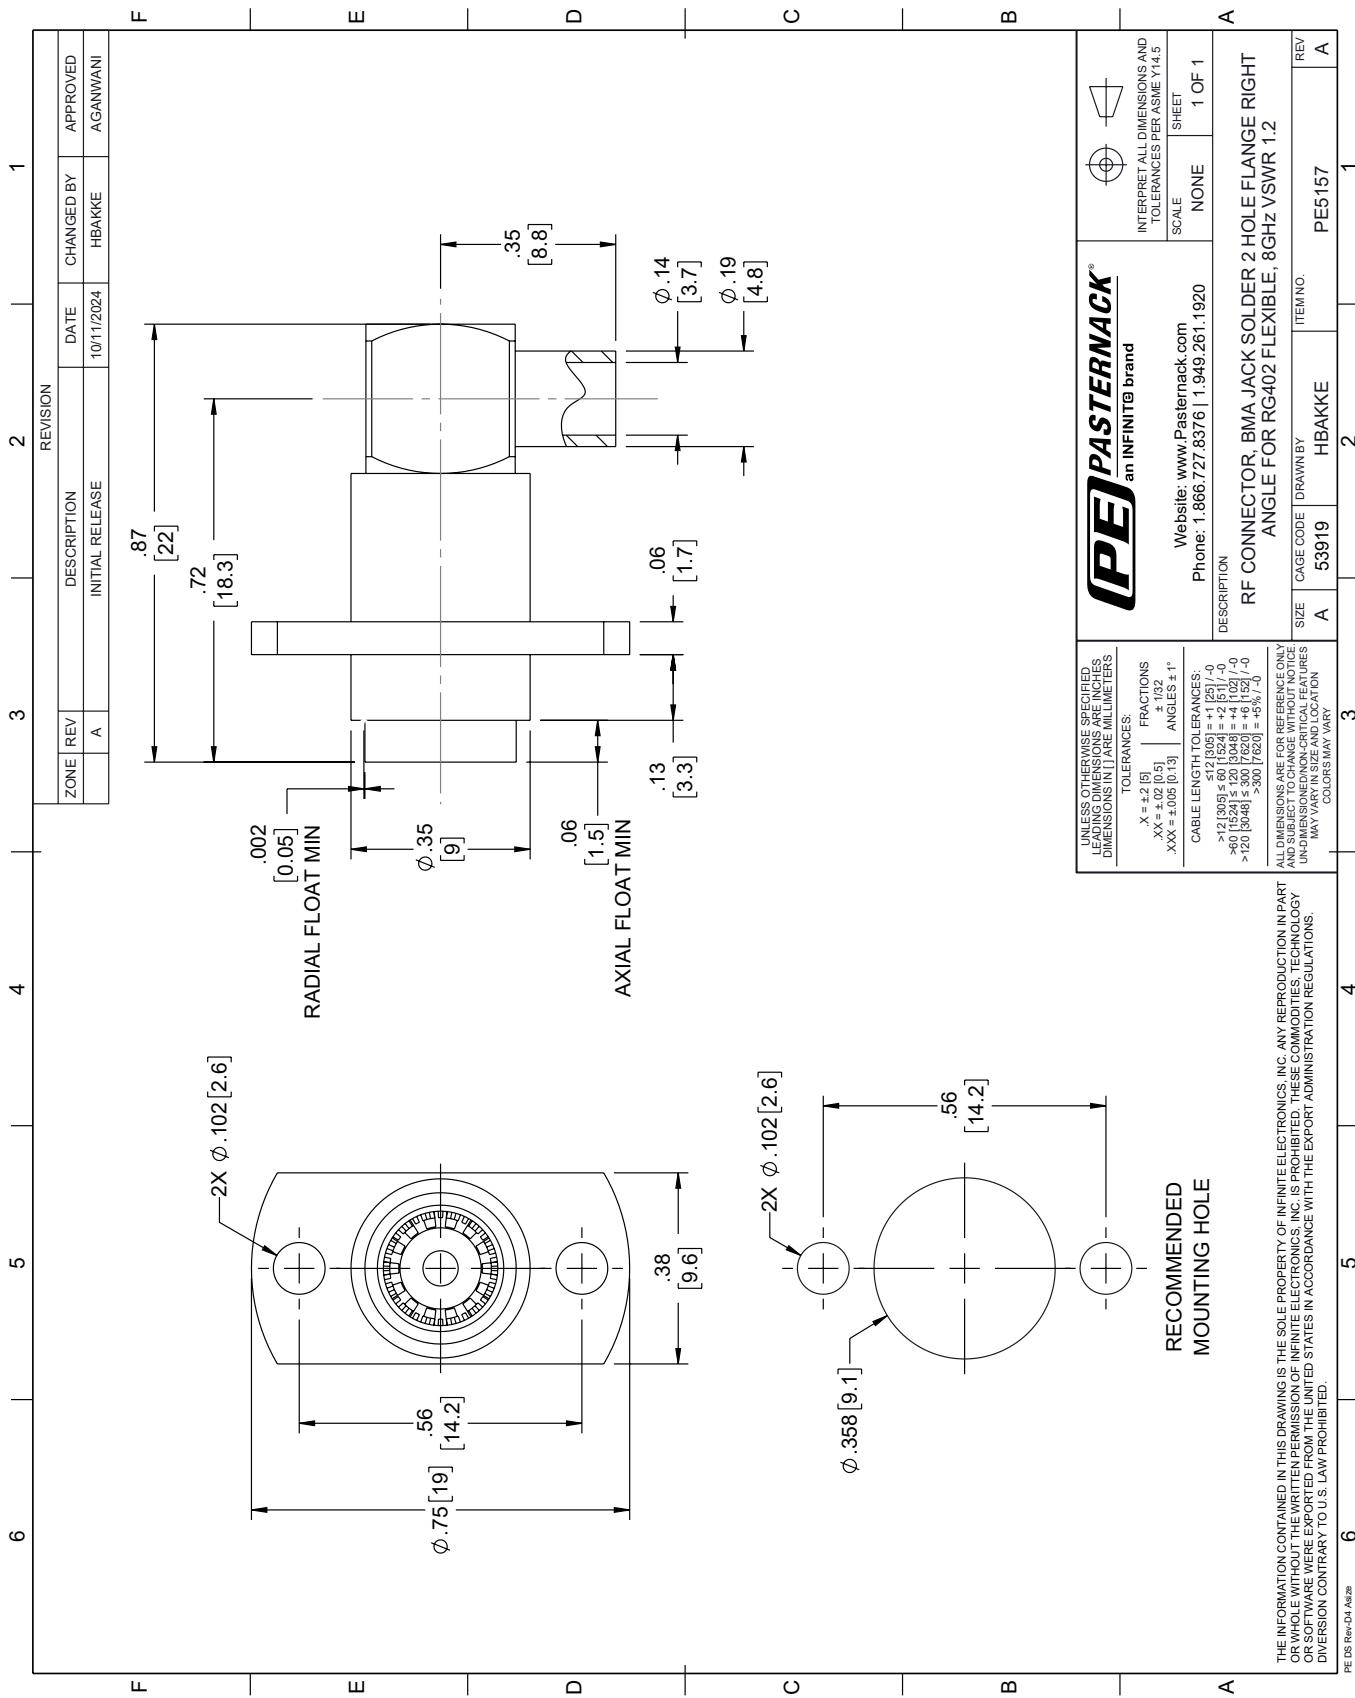

RG402 Coax Cable with Copper Outer Conductor



RG402/U

Configuration

- Semi-Rigid Cable
- M17/130-RG402
- 1 Shield(s)

Features

- Frequency range of 34 GHz
- Can be bent and formed into shape
- Low Loss
- Phase Stable

Applications

- Military & Defense
- Cable Assemblies
- Precise cable routing

Description

RG402/U part number from Pasternack is a RG402 coax cable that is semi-rigid. Pasternack RG402 semi-rigid coax cable is 50 Ohm and has a PTFE dielectric. RG402 coax has a shield count of 1 and the maximum frequency for this Pasternack cable is 34 GHz. RG402 coax cable has an attenuation at 1 GHz of 11.1 dB and a maximum power of 450 watts at 1 GHz.

Pasternack RG402 coax cables are part of over 40,000 RF, microwave and millimeter wave components. RG402 cables and our other RF parts are available for same day shipping worldwide. Custom RF cable assemblies using RG402 or other coax can be built and shipped same day as well.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		34	GHz
Impedance		50		Ohms
Velocity of Propagation		69.5		%
Dielectric Withstanding Voltage (AC)			5,000	Vrms
Corona Discharge at 60 Hz			1,900	Vrms
Power@ 1GHz			450	Watts

Performance by Frequency Band

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	10	18	26.5	GHz
Attenuation, Typ	7.6	11.1	43.4	63.6	82.8	dB/100ft
	24.93	36.42	142.39	208.66	271.65	dB/100m
Input Power (CW), Max	600	450	120	73	70	Watts

Mechanical Specifications

Weight	0.032 lbs/ft [0.05 kg/m]
Min. Bend Radius (Repeated)	0.25 in [6.35 mm]

RG402 Coax Cable with Copper Outer Conductor



RG402/U

Construction Specifications

Description	Material and Plating	Diameter
Inner Conductor	Copper Clad Steel, Silver, 1 Strand	0.036 in [0.91 mm]
Conductor Type	Solid	
Dielectric	PTFE	0.118 in [3 mm]
Outer Conductor	Copper	0.141 in [3.5 mm]
Jacket	Tan	

Environmental Specifications

Temperature

Operating Range

-55 to 125 deg C

Compliance Certifications

(see [product page](#) for current document)

Plotted and Other Data

Notes:

RG402 Coax Cable with Copper Outer Conductor from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [RG402 Coax Cable with Copper Outer Conductor RG402/U](#)

URL: <https://www.pasternack.com/semirigid-0.141-rg402-50-ohm-coax-cable-copper-rg402-u-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

RG402/U CAD Drawing

RG402 Coax Cable with Copper Outer Conductor

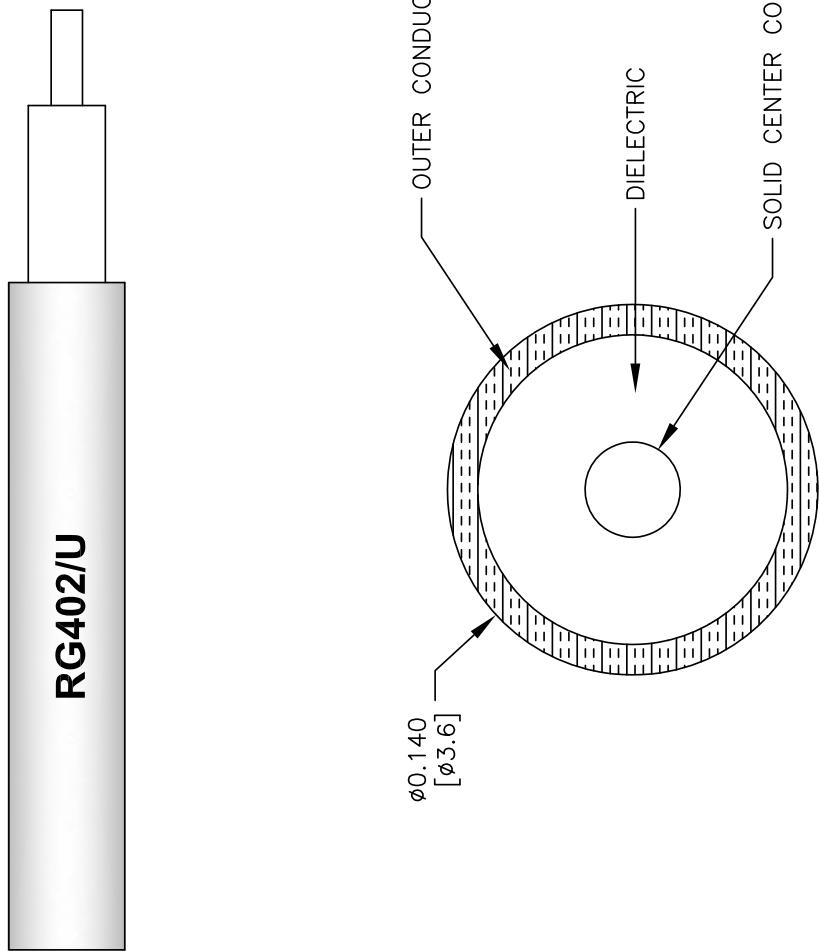

PASTERNACK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE
RG402/U

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES (mm).

FSCM NO.	CAD FILE	SCALE N/A	SIZE A	41742
53919	111816			