



Directional 6 dB SMA Coupler From 500 MHz  
to 1,000 MHz Rated To 50 Watts

TECHNICAL DATA SHEET

PE2200-6

**Directional 6 dB SMA Coupler From 500 MHz to 1,000 MHz Rated To 50 Watts**

**Configuration**

Connector 1	SMA Female
Connector 2	SMA Female
Connector 3	SMA Female
Design	Directional Coupler

**Electrical Specifications**

Frequency Range, MHz	500 to 1,000
Directivity, dB	25
Impedance, Ohms	50
Maximum Insertion Loss, dB	1.8
Maximum Input Power, Watts	50
Maximum Input VSWR	1.15:1
Maximum Secondary Line VSWR	1.15:1
Peak Power, KWatts	3
Coupling Value, dB	6
Coupling Tolerance, dB	± 1
Frequency Sensitivity, dB	0.6

**Mechanical Specifications**

**Size**

Length, in [mm]	3.85 [97.79]
Width, in [mm]	0.38 [9.65]
Height, in [mm]	1 [25.4]

**Connector 1**

Type	SMA Female
------	------------

**Connector 2**

Type	SMA Female
------	------------

**Connector 3**

Type	SMA Female
------	------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 6 dB SMA Coupler From 500 MHz to 1,000 MHz Rated To 50 Watts PE2200-6](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



Directional 6 dB SMA Coupler From 500 MHz  
to 1,000 MHz Rated To 50 Watts

TECHNICAL DATA SHEET

PE2200-6

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level

Directional 6 dB SMA Coupler From 500 MHz to 1,000 MHz Rated To 50 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 6 dB SMA Coupler From 500 MHz to 1,000 MHz Rated To 50 Watts PE2200-6](#)

URL: <http://www.pasternack.com/directional-6-db-sma-coupler-500-1000-mhz-50-watts-pe2200-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE2200-6 CAD Drawing

Directional 6 dB SMA Coupler From 500 MHz to 1,000 MHz Rated To 50 Watts

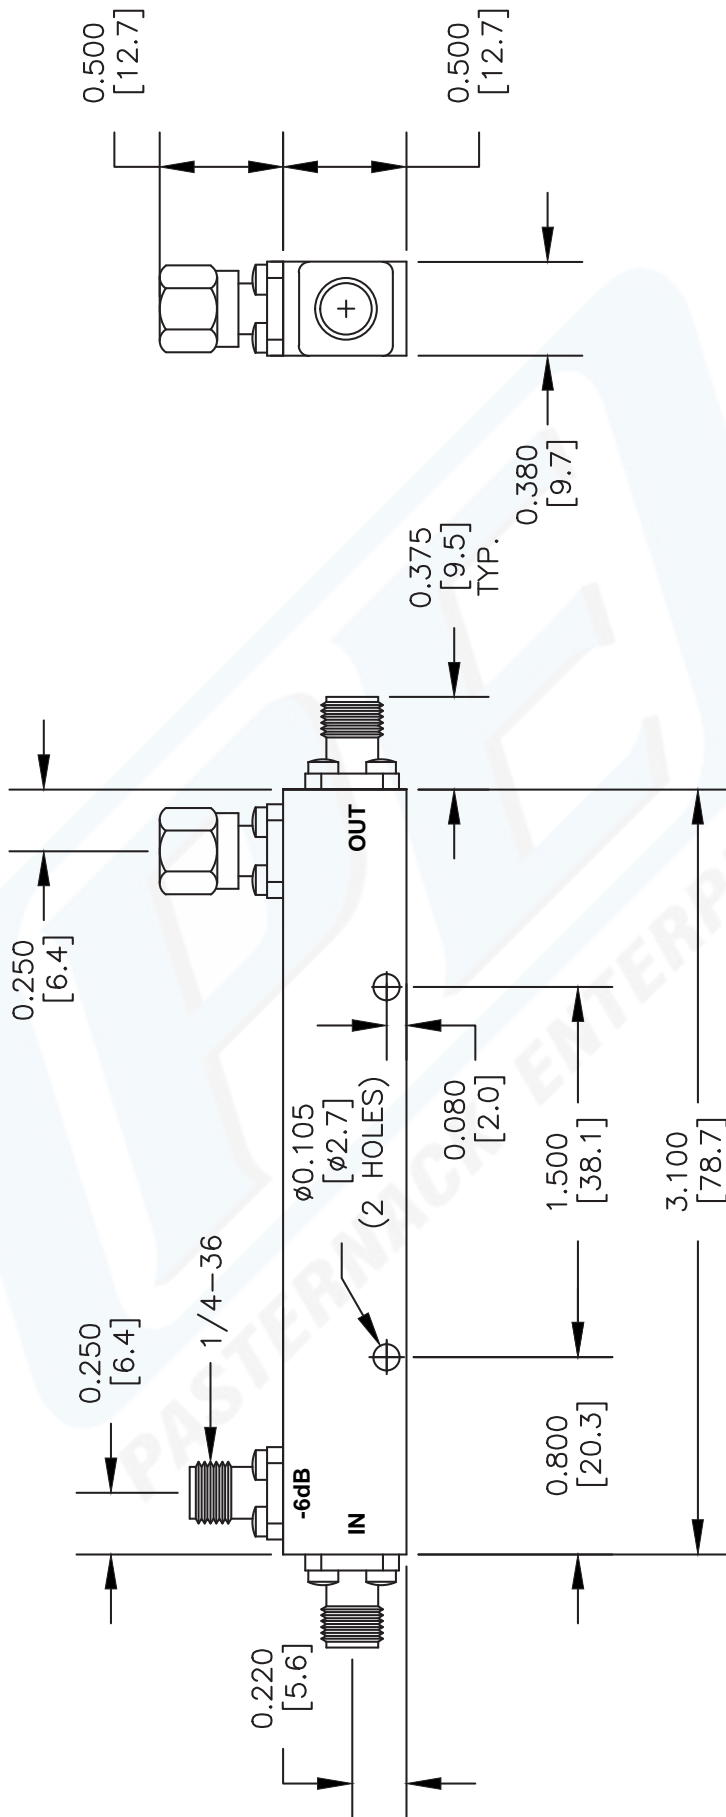

DWG TITLE

**PE2200**

FSCM NO. 53919

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE 092908

SCALE N/A

SIZE A

XXXX

**PE PASTERNAK®**

Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com