



2 dB NF, 20 mW, 2 GHz to 4 GHz, Low Noise Amplifier, 38 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A1001

PE15A1001 is a S-band coaxial low noise amplifier operating in the 2 to 4 GHz frequency range. The amplifier offers 2 dB noise figure, 13 dBm minimum of saturated power and high 38 dB minimal small signal gain with the excellent gain flatness of ± 1.0 dB max. This technical performance is achieved through the use of hybrid MIC design and advanced GaAs PHEMT devices. The low noise amplifier requires typically a +12V DC power supply. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation, bias sequencing, and reverse bias protection for added reliability. The amplifier operates over the temperature range of -40°C and $+85^{\circ}\text{C}$.

Features

- 2 GHz to 4 GHz Frequency Range
- Psat: 13 dBm min
- High Small Signal Gain: 38 dB
- Gain Flatness: ± 1.0 dB max
- Noise Figure: 2 dB
- 50 Ohm Input and Output Matched
- -40 to 85°C Operating Temperature
- Unconditionally Stable
- Regulated Supply & Bias Sequencing
- Hermetically Sealed Module
- Overvoltage External Protection for Easy Repair

Applications

- Laboratory Applications
- R&D Labs
- Radar Systems
- Telecom Infrastructure
- Test Instrumentation
- Military & Space
- Communication Systems
- Wireless Communications
- Satellite Communications
- Microwave Radio Systems
- Low Noise Amplifier
- General Purpose Amplification
- Gain Block

Electrical Specifications (TA = $+25^{\circ}\text{C}$, DC Voltage = 12Volts, DC Current = 200mA)

| Description | Minimum | Typical | Maximum | Units |
|-----------------------------|---------|---------|---------|--------------------|
| Frequency Range | 2 | | 4 | GHz |
| Small Signal Gain | 38 | | | dB |
| Gain Flatness | | | ± 1 | dB |
| Minimum Psat | +13 | | | dBm |
| Noise Figure | | 2 | | dB |
| Input VSWR | | | 2:1 | |
| Output VSWR | | | 2:1 | |
| Operating DC Voltage | 11 | 12 | 13 | Volts |
| Operating DC Current | | | 200 | mA |
| Operating Temperature Range | -40 | | +85 | $^{\circ}\text{C}$ |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 dB NF, 20 mW, 2 GHz to 4 GHz, Low Noise Amplifier, 38 dB Gain, SMA PE15A1001](#)



2 dB NF, 20 mW, 2 GHz to 4 GHz, Low
Noise Amplifier, 38 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A1001

Absolute Maximum Rating

| Parameter | Rating | Units |
|------------------------------------|------------|-------|
| Source Voltage | +15 | Volts |
| RF input Power | +17 | dBm |
| Operating Temperature (base-plate) | -40 to +85 | °C |
| Storage Temperature | -55 to +85 | °C |



ESD Sensitive Material,
Transport material in
Approved ESD bags.
Handle only in approved
ESD Workstation.

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 dB NF, 20 mW, 2 GHz to 4 GHz, Low Noise Amplifier, 38 dB Gain, SMA PE15A1001](#)





2 dB NF, 20 mW, 2 GHz to 4 GHz, Low Noise Amplifier, 38 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A1001

Power Data

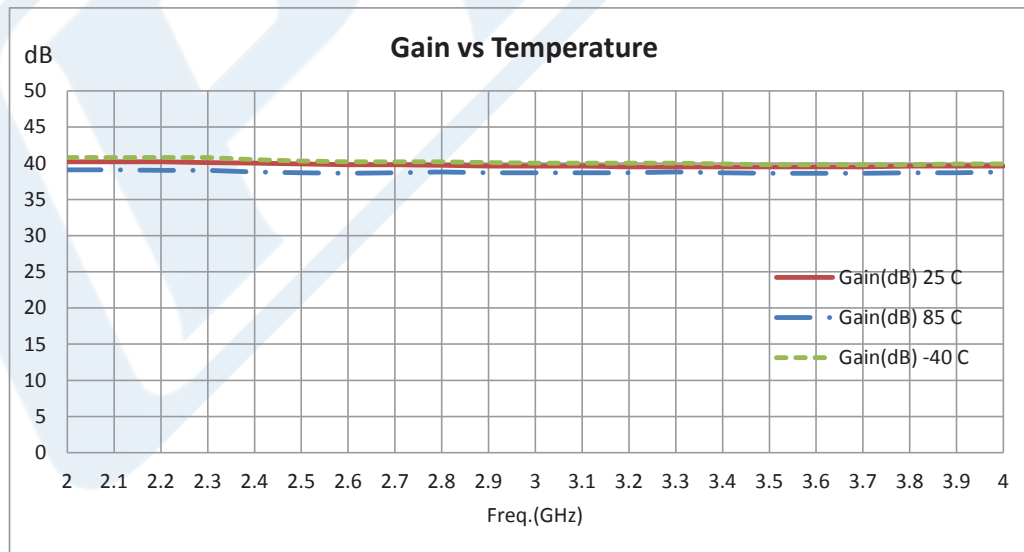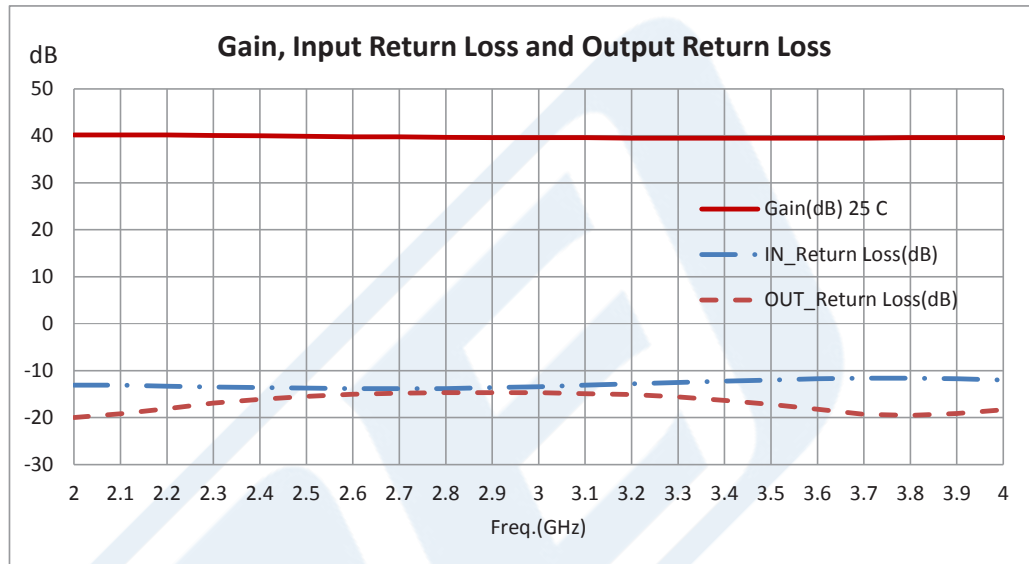



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 dB NF, 20 mW, 2 GHz to 4 GHz, Low Noise Amplifier, 38 dB Gain, SMA PE15A1001](#)



2 dB NF, 20 mW, 2 GHz to 4 GHz, Low Noise Amplifier, 38 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A1001

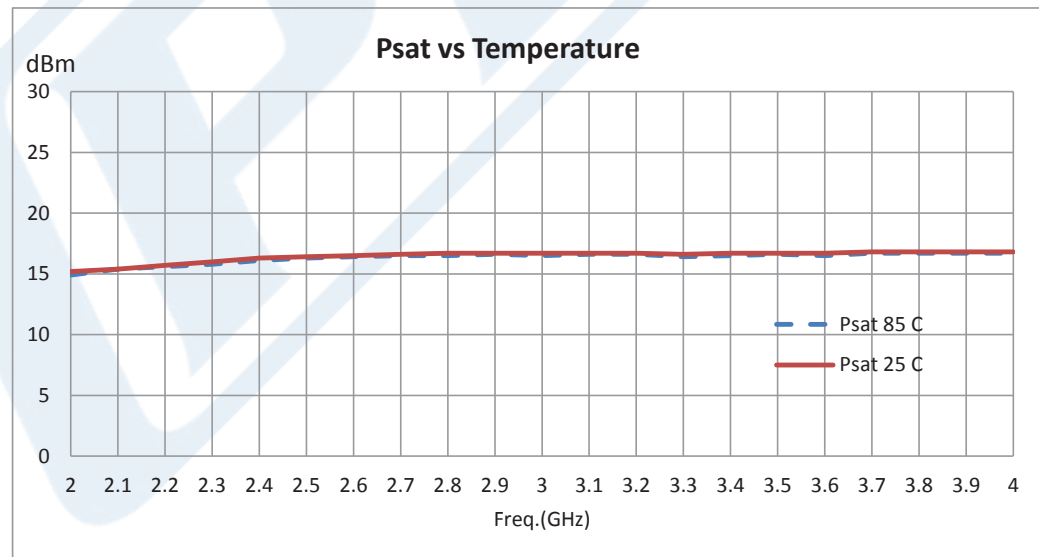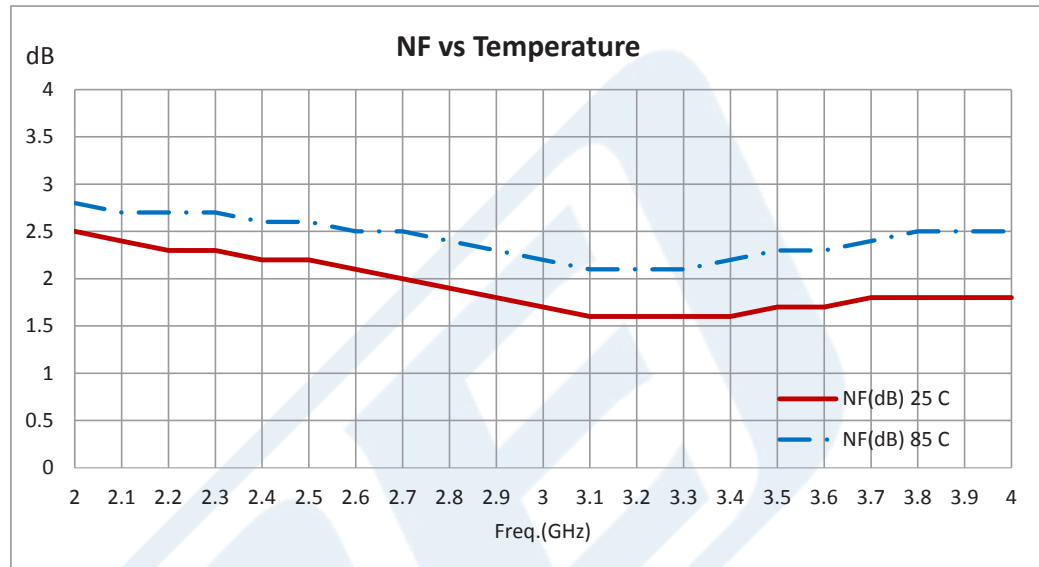

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 dB NF, 20 mW, 2 GHz to 4 GHz, Low Noise Amplifier, 38 dB Gain, SMA PE15A1001](#)



2 dB NF, 20 mW, 2 GHz to 4 GHz, Low
Noise Amplifier, 38 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A1001

2 dB NF, 20 mW, 2 GHz to 4 GHz, Low Noise Amplifier, 38 dB Gain, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 dB NF, 20 mW, 2 GHz to 4 GHz, Low Noise Amplifier, 38 dB Gain, SMA PE15A1001](http://www.pasternack.com/2-db-4-ghz-low-noise-amplifier-38-db-gain-sma-pe15a1001-p.aspx)

URL: <http://www.pasternack.com/2-db-4-ghz-low-noise-amplifier-38-db-gain-sma-pe15a1001-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15A1001 CAD Drawing

2 dB NF, 20 mW, 2 GHz to 4 GHz, Low Noise Amplifier, 38 dB Gain, SMA

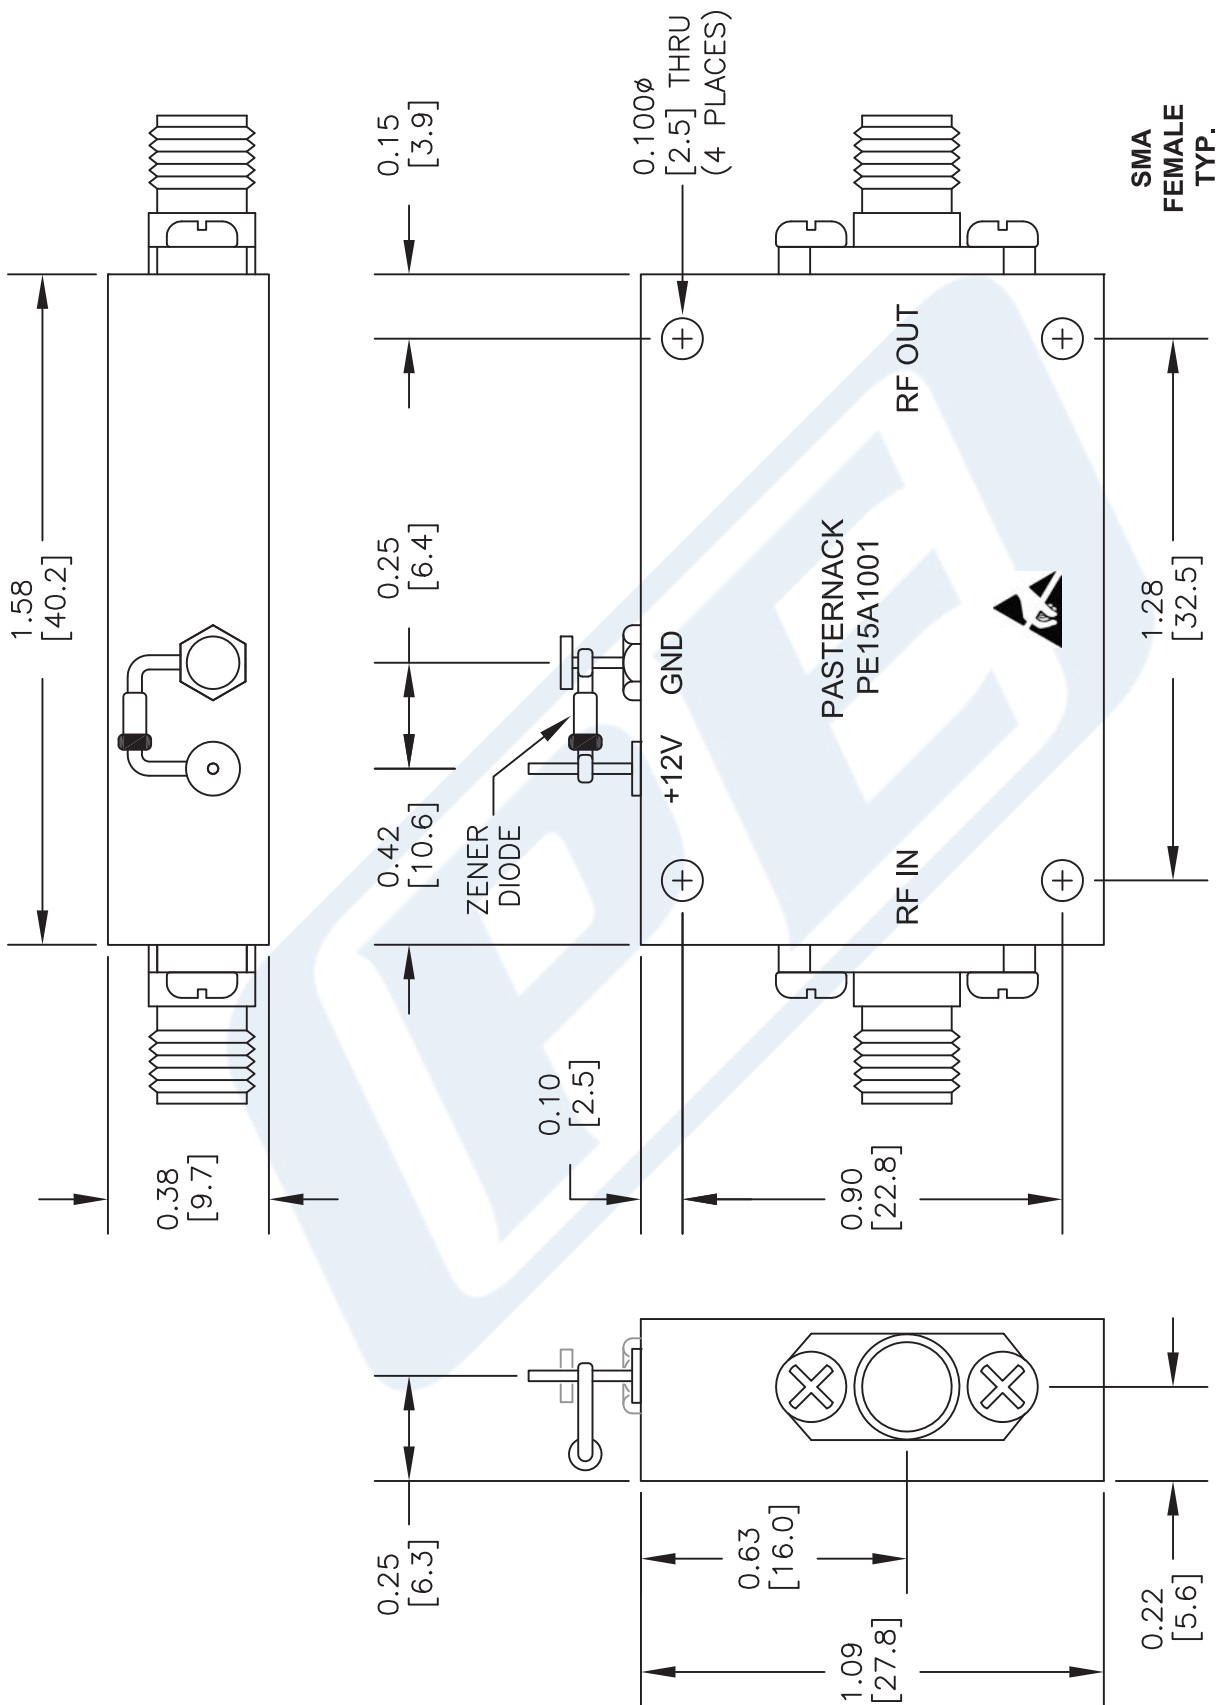

DWG TITLE

PE15A1001

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 041414

SCALE N/A

SIZE A

2233



PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com