



## SMA Calibrated Noise Source Module, Output ENR of 15 dB, +28 VDC, 1 GHz to 18 GHz

### Noise Generators Technical Data Sheet

PE85N1004

#### Features

- 1 GHz to 18 GHz Bandwidth
- Calibrated Frequencies: 1 GHz steps
- High ENR output: 15 dB min
- Typical Flatness +/- 2.0 dB
- Excellent Stability
- Noise Output Temperature Variation: <0.01 dB/°C
- Noise Output Variation <0.1 dB/%V
- Rugged Package Design supports output Female SMA connector
- Designed to meet MIL-STD-202F environmental test conditions
- Internal Voltage Regulation

#### Applications

- Noise Figure Measurements
- Built-In Test equipment for signal strength calibrators and radar applications
- Automatic Test Equipment (ATE)
- Jamming
- Baseband Signal Simulation
- Additive White Gaussian Noise (AWGN) source for Error Rate Measurements
- Increase dynamic range of A/D Converters
- SATCOM for bit error rate (BER) and noise figure
- Can be used as a Jitter source.

#### Description

The PE85N1004 is a coaxial packaged Noise Source module which operates over a wide frequency range from 1 GHz to 18 GHz. The design is calibrated in 1 GHz steps and is ideal for Noise Figure measurements and a variety of built-in test applications. This model operates at +28 Vdc and features an output ENR level of 15 dB min, typical flatness across the entire frequency band is +/- 2.0 dB, and excellent stability. Performance is specified over -55°C to +85°C with Noise Output Temperature Variation <0.01 dB/°C, Noise Output Variation <0.1 dB/%V. The rugged package design supports an output Female SMA connector with an EMI/RFI filter voltage pin and ground tab. Additionally, the model is designed to meet a variety of demanding MIL-STD-202F environmental test conditions including Humidity, Thermal Shock, and Vibration for added confidence for highly reliable operation.

#### Electrical Specifications

##### RF Characteristics

| Description                       | Minimum | Typical     | Maximum | Units    |
|-----------------------------------|---------|-------------|---------|----------|
| Frequency Range                   | 1       |             | 18      | GHz      |
| Impedance                         |         | 50          |         | Ohms     |
| Output ENR                        | 15      |             |         | dB       |
| Flatness                          |         | ±2          |         | dB       |
| VSWR                              |         | 1.5:1       |         |          |
| Output Variation vs Input Voltage |         |             | 0.1     | dB/%V    |
| Output Variation vs Temperature   |         |             | 0.01    | dB/deg C |
| Bias Voltage 1                    | 22      | 28          | 30      | Volts    |
| Input Current 1                   |         |             | 25      | mA       |
| Calibration Points                |         | 1 GHz Steps |         |          |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Calibrated Noise Source Module, Output ENR of 15 dB, +28 VDC, 1 GHz to 18 GHz PE85N1004](#)



SMA Calibrated Noise Source Module, Output  
ENR of 15 dB, +28 VDC, 1 GHz to 18 GHz

## Noise Generators Technical Data Sheet

PE85N1004

### Mechanical Specifications

#### Size

|              |                      |
|--------------|----------------------|
| Length       | 1.25 in [31.75 mm]   |
| Width/Dia.   | 0.75 in [19.05 mm]   |
| Height       | 0.5 in [12.7 mm]     |
| Weight       | 0.062 lbs [28.12 g]  |
| Package Type | Connectorized Module |

#### Connectors

|                  |            |
|------------------|------------|
| DC Connector     | Pin        |
| Output Connector | SMA Female |

### Environmental Specifications

#### Temperature

|                 |                   |
|-----------------|-------------------|
| Operating Range | -55 to +85 deg C  |
| Storage Range   | -65 to +125 deg C |

#### Environment

|                   |  |
|-------------------|--|
| Humidity          | MIL-STD-202F, Method 103, Cond B (96 hrs@95% R.H.)   |
| Shock             | MIL-STD-202F, Method 213, Cond B (100g, 6 msec)  |
| Vibration         | MIL-STD-202F, Method 204, Cond B (0.6" 2x ampl or 15g)   |
| Altitude          | MIL-STD-202F, Method 105, Condition B (50,000 ft)  |
| Temperature Cycle | MIL-STD-202F, Method 105C, Condition D (5 cycles)  |
| Thermal Shock     | MIL-STD-202F, Method 107, Condition A (5 cycles)   |
| ESD Sensitivity   | ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation. |



**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Calibrated Noise Source Module, Output ENR of 15 dB, +28 VDC, 1 GHz to 18 GHz PE85N1004](#)




SMA Calibrated Noise Source Module, Output  
ENR of 15 dB, +28 VDC, 1 GHz to 18 GHz

## Noise Generators Technical Data Sheet

PE85N1004

Typical Performance Data

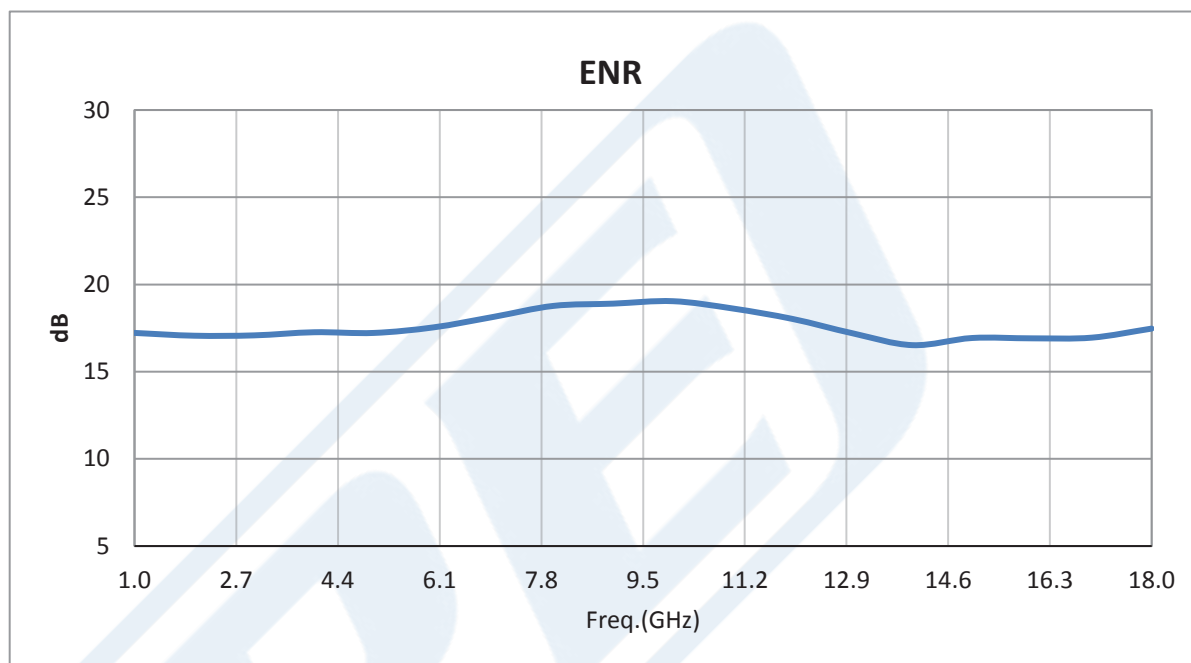


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Calibrated Noise Source Module, Output ENR of 15 dB, +28 VDC, 1 GHz to 18 GHz PE85N1004](#)



SMA Calibrated Noise Source Module, Output  
ENR of 15 dB, +28 VDC, 1 GHz to 18 GHz

## Noise Generators Technical Data Sheet

PE85N1004

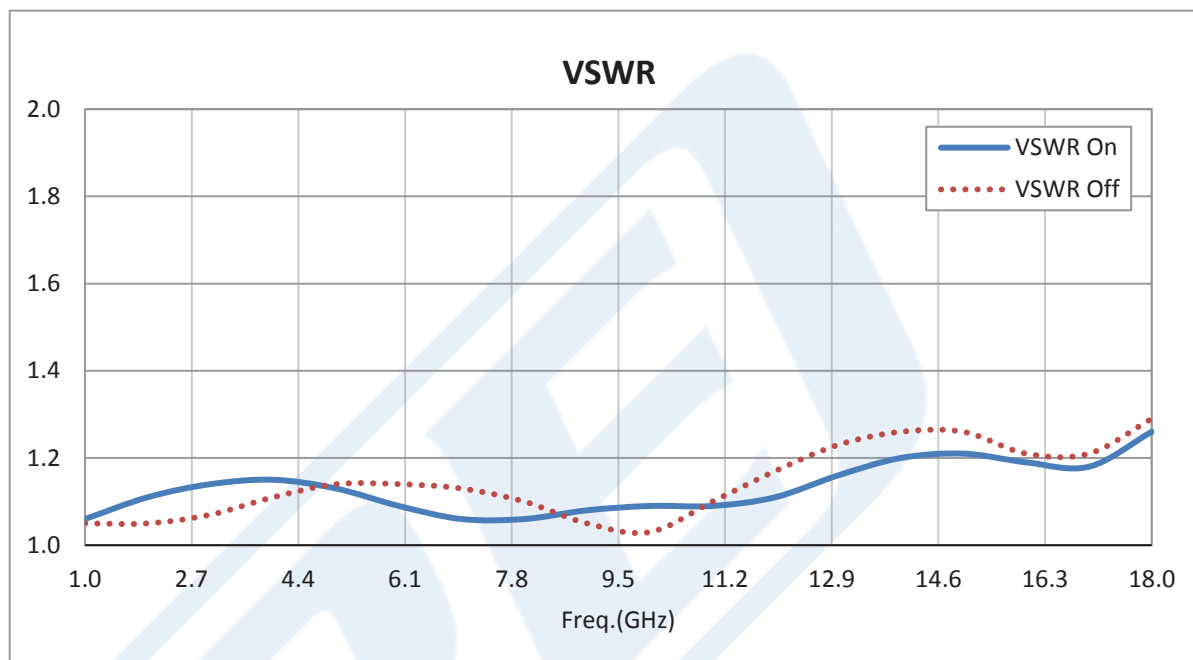

SMA Calibrated Noise Source Module, Output ENR of 15 dB, +28 VDC, 1 GHz to 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Calibrated Noise Source Module, Output ENR of 15 dB, +28 VDC, 1 GHz to 18 GHz PE85N1004](https://www.pasternack.com/sma-calibrated-noise-source-enr-15-db-18-ghz-pe85n1004-p.aspx)

URL: <https://www.pasternack.com/sma-calibrated-noise-source-enr-15-db-18-ghz-pe85n1004-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE85N1004 CAD Drawing

SMA Calibrated Noise Source Module, Output ENR of 15 dB, +28 VDC, 1 GHz to 18 GHz

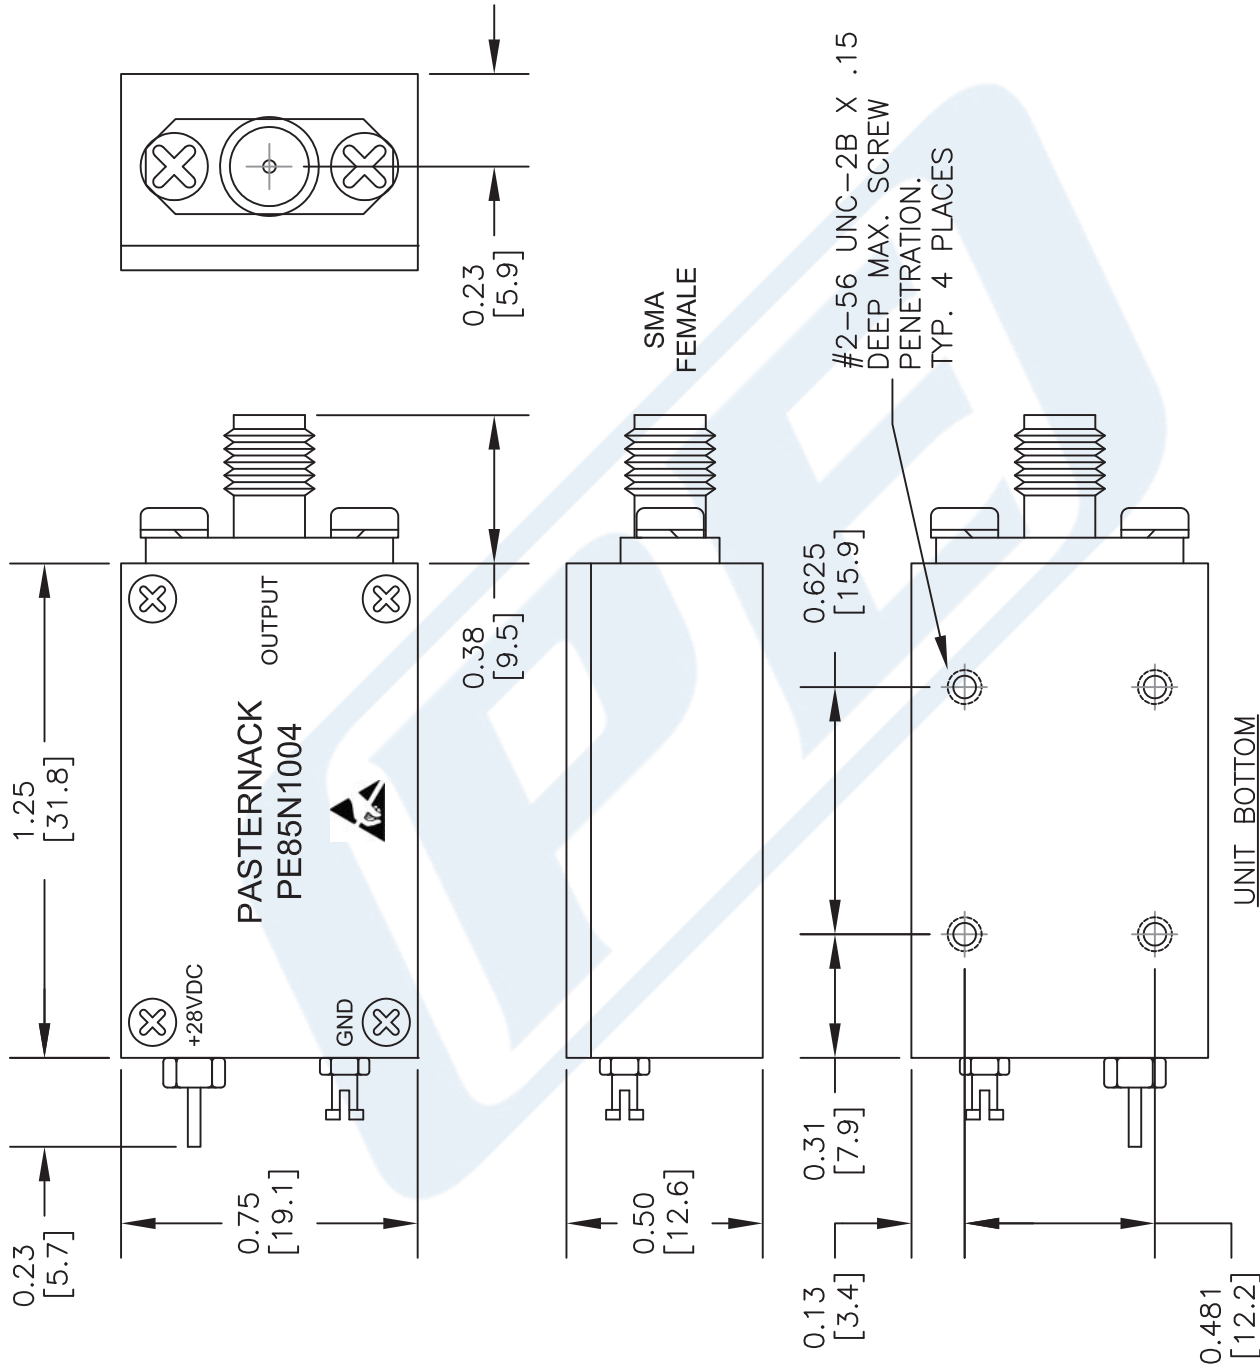

DWG TITLE

**PE85N1004**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 110915

SCALE N/A

SIZE A

2233

**PE PASTERNAK**  
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)