



4 Section Bandpass Filter With SMA Female Connectors Operating From 1.92 GHz to 1.98 GHz With a 60 MHz Passband

Bandpass Filters Technical Data Sheet

PE8709

Features

- Pass band of 60 MHz
- 1.92 GHz to 1.98 GHz
- Four section
- Combine filter design
- 50 dB rejection at 1.7 GHz and 2.2 GHz (about 220 MHz from band edge)
- Maximum insertion loss of 1.5 dB
- Female SMA connectors

Applications

- UMTS

Description

The PE8709 is a four section band pass filter that is useful for filtering for UMTS uses. The pass band is 60 MHz, or 1.92 to 1.98 GHz. Implementing a combine design, the filter has excellent rejection of 50 dB at 1.7 GHz and 2.2 GHz, or about 220 MHz from the band edges. It has a maximum insertion loss of 1.5 dB. The PE8709 has SMA female connectors.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Passband Frequency	1.92		1.98	GHz
Impedance		50		Ohms
Insertion Loss			1.5	dB
Passband VSWR		1.5:1		
Rejection at 1.7 GHz	50			dB
Rejection at 2.2 GHz	50			dB
Input Power, CW			5	Watts

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

Length	2 in [50.8 mm]
Width	1.32 in [33.53 mm]
Height	0.53 in [13.46 mm]
Weight	0.13 lbs [58.97 g]

Configuration

Design	Combine
Number of Sections	4
Package Style	Connectorized Module
Connector 1	SMA Female
Connector 2	SMA Female

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Section Bandpass Filter With SMA Female Connectors Operating From 1.92 GHz to 1.98 GHz With a 60 MHz Passband PE8709](#)



4 Section Bandpass Filter With SMA Female Connectors
Operating From 1.92 GHz to 1.98 GHz With a 60 MHz Passband

Bandpass Filters Technical Data Sheet

PE8709

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

REACH Compliant



12/17/2014

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Typical Performance Data

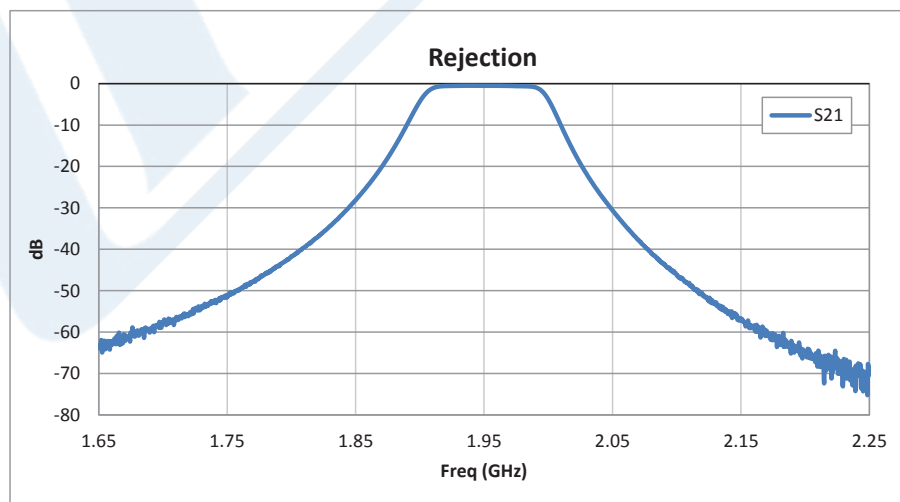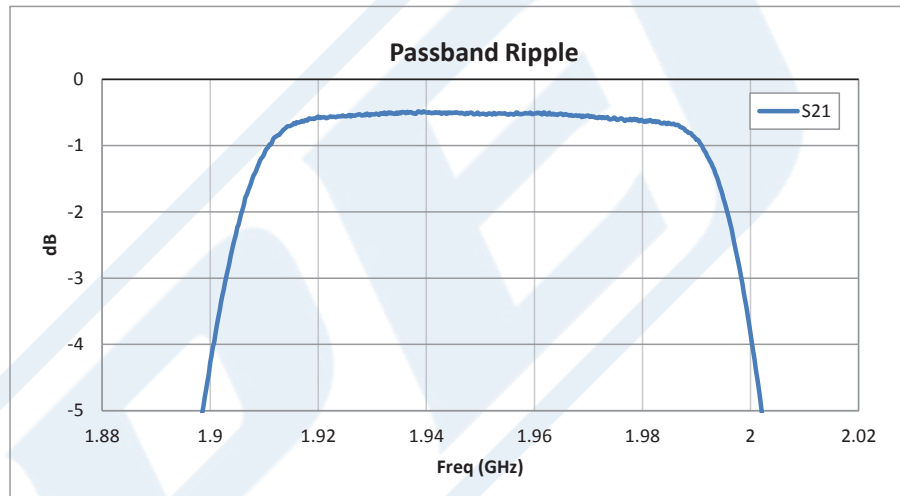



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Section Bandpass Filter With SMA Female Connectors Operating From 1.92 GHz to 1.98 GHz With a 60 MHz Passband PE8709](#)



4 Section Bandpass Filter With SMA Female Connectors
Operating From 1.92 GHz to 1.98 GHz With a 60 MHz Passband

Bandpass Filters Technical Data Sheet

PE8709

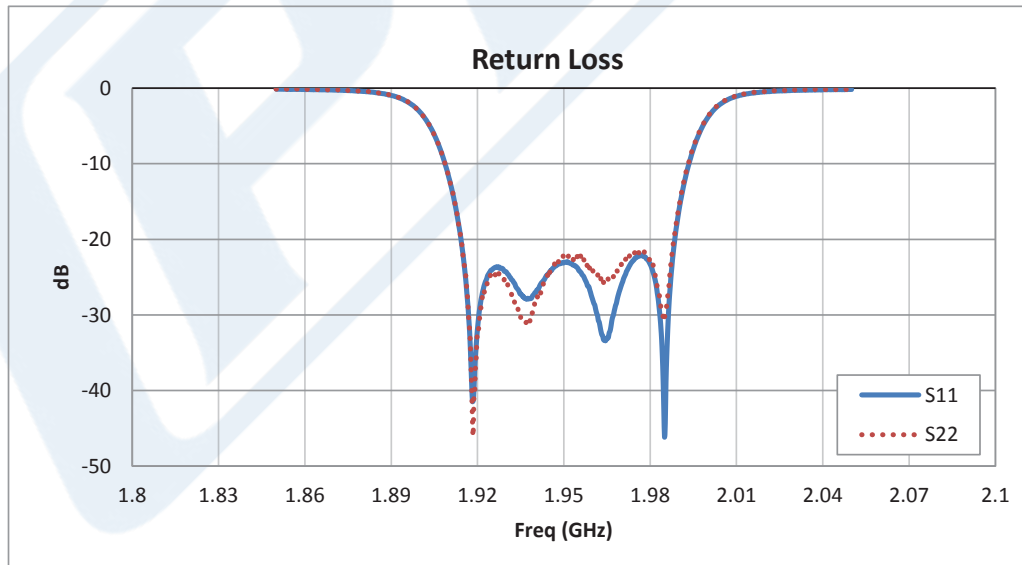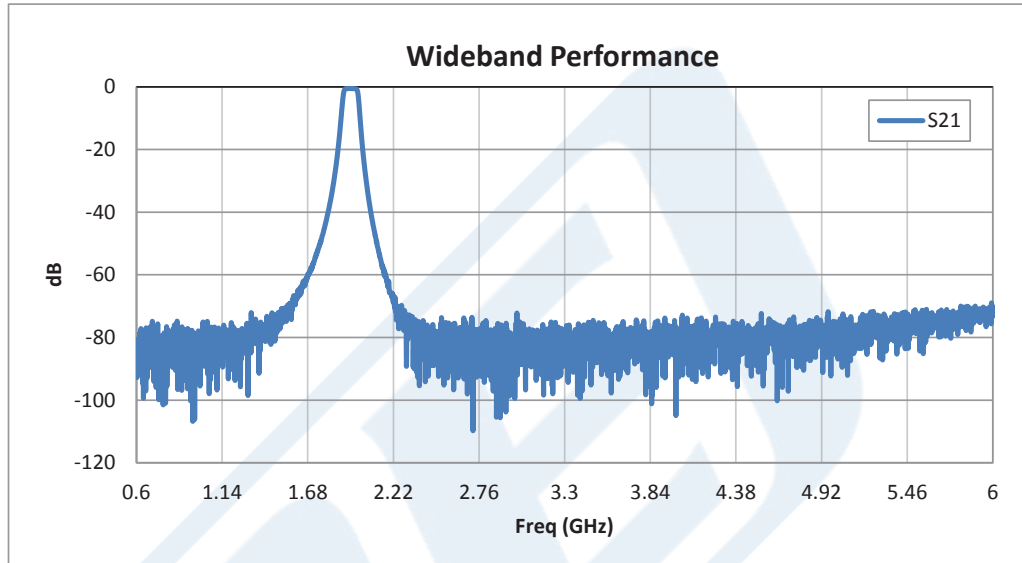

4 Section Bandpass Filter With SMA Female Connectors Operating From 1.92 GHz to 1.98 GHz With a 60 MHz Passband from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Section Bandpass Filter With SMA Female Connectors Operating From 1.92 GHz to 1.98 GHz With a 60 MHz Passband PE8709](#)



4 Section Bandpass Filter With SMA Female Connectors
Operating From 1.92 GHz to 1.98 GHz With a 60 MHz Passband

Bandpass Filters Technical Data Sheet

PE8709


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Section Bandpass Filter With SMA Female Connectors Operating From 1.92 GHz to 1.98 GHz With a 60 MHz Passband PE8709](http://www.pasternack.com/4-section-band-pass-filter-1.92-ghz-1.98-ghz-passband-60-mhz-pe8709-p.aspx)

URL: <http://www.pasternack.com/4-section-band-pass-filter-1.92-ghz-1.98-ghz-passband-60-mhz-pe8709-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE8709 CAD Drawing

4 Section Bandpass Filter With SMA Female Connectors Operating
From 1.92 GHz to 1.98 GHz With a 60 MHz Passband

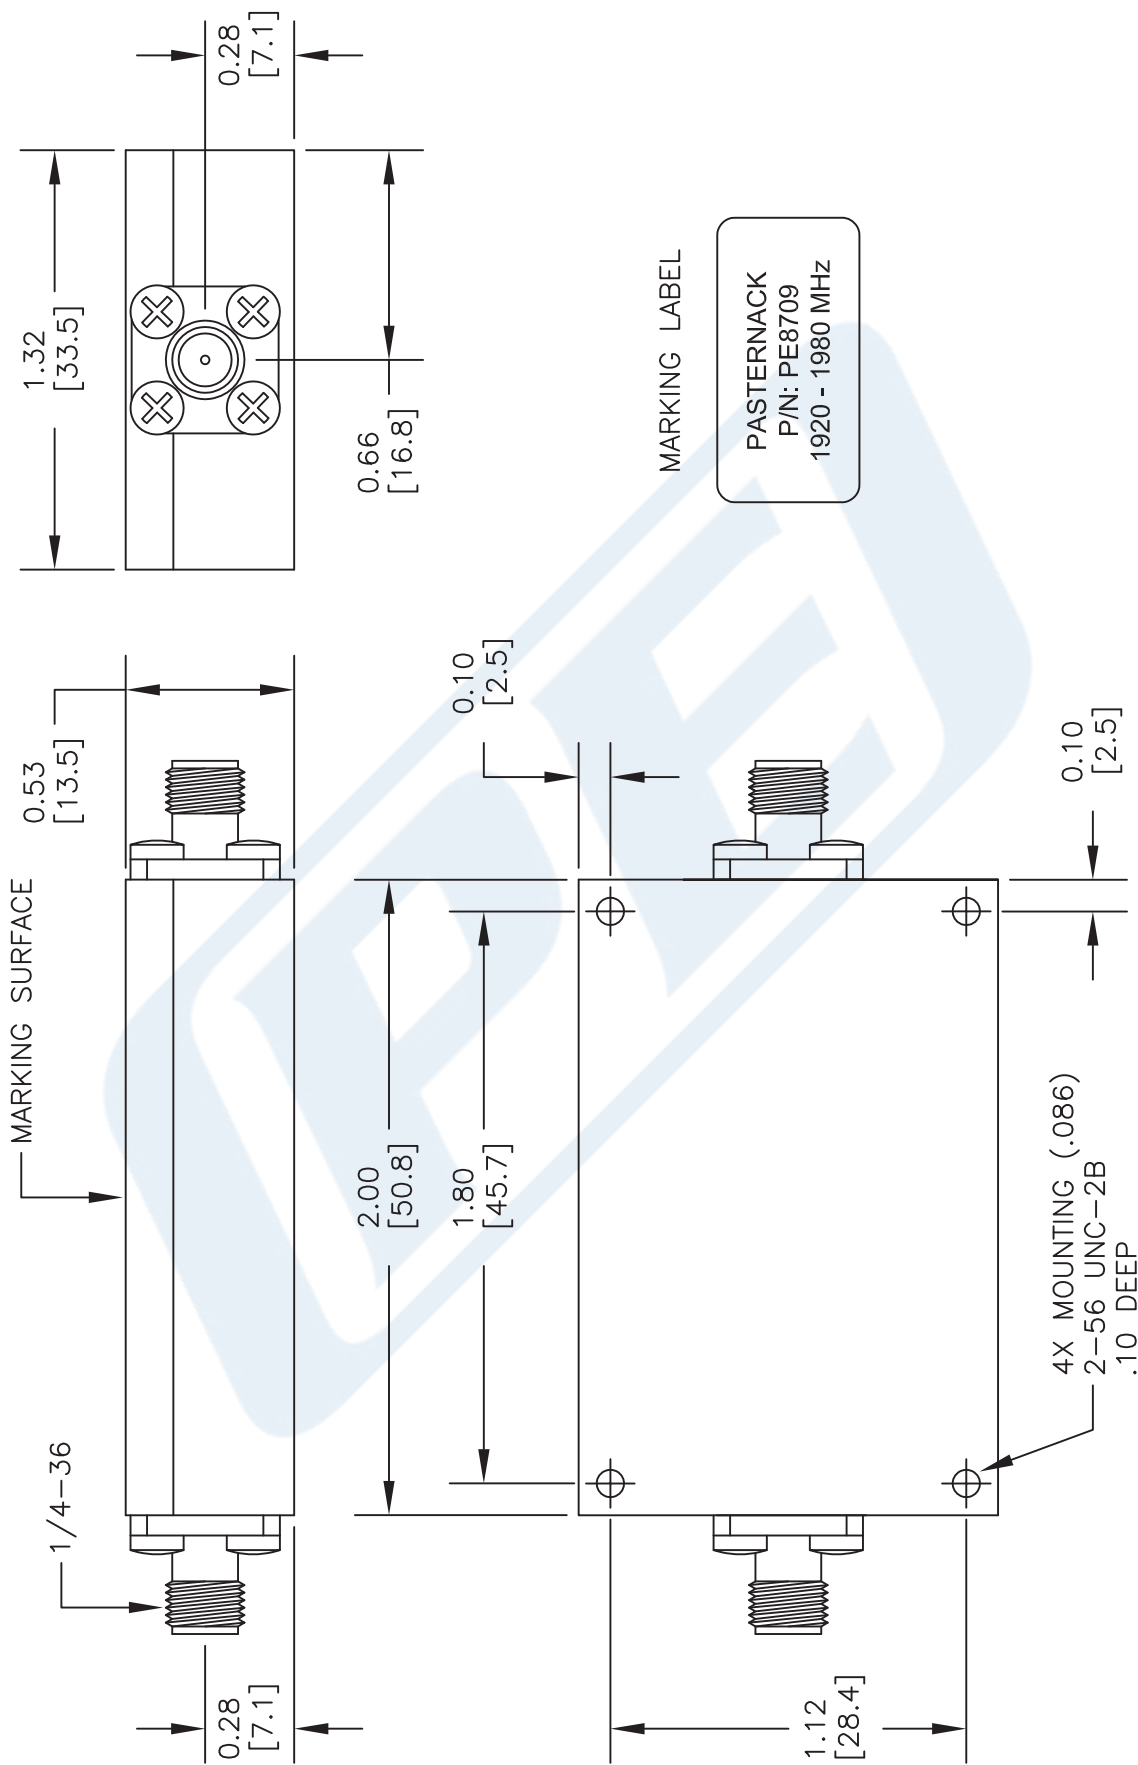

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE8709

FSCM NO. 53919

CAD FILE 011316

SCALE N/A

SIZE A

150

PE PASTERNAK
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com