



BMA Plug Slide-On Connector Solder Attachment 2 Hole Flange Mount Stub Terminal, .481 inch Hole Spacing, .010 inch Diameter

RF Connectors Technical Data Sheet

PE45347

Configuration

- Slide-On BMA Plug Connector
- 50 Ohms
- Straight Body Geometry
- Stub Interface Type
- Solder Attachment
- 2 Hole Flange

Features

- Max. Operating Frequency 22 GHz
- Excellent VSWR of 1.25:1
- Gold Plated Beryllium Copper Contact
- 51.18µ in. minimum contact plating
- Blind Mate Connector
- Low-Engagement Force

Applications

- General Purpose Test
- Rack and Panel Mount Applications
- Blind Mating
- Rack and Panel
- Phased Array Systems
- Base Stations
- RF Backplanes
- Test I/O

Description

Pasternack's PE45347 BMA plug slide-on 2 hole flange mount connector with solder attachment stub terminal (.481 inch hole spacing) is part of our full line of RF components available for same-day shipping. Our BMA plug connector operates up to a maximum frequency of 22 GHz and offers excellent VSWR of 1.25:1. The Pasternack blind mate connector is ideal for applications where direct visual or tactile access to the connection point is not possible, for example, when two circuit boards need to be mated. This BMA 2 hole flange connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our BMA plug 2 hole flange connector PE45347 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|--------------------------------------|---------|---------|---------|-------|
| Frequency Range | DC | | 22 | GHz |
| VSWR | | | 1.25:1 | |
| Insertion Loss | | | 0.32 | dB |
| Operating Voltage (AC) | | | 500 | Vrms |
| Dielectric Withstanding Voltage (AC) | | | 1,500 | Vrms |
| Insulation Resistance | 5,000 | | | MOhms |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BMA Plug Slide-On Connector Solder Attachment 2 Hole Flange Mount Stub Terminal, .481 inch Hole Spacing, .010 inch Diameter PE45347](#)



BMA Plug Slide-On Connector Solder Attachment 2 Hole Flange Mount Stub Terminal, .481 inch Hole Spacing, .010 inch Diameter

RF Connectors Technical Data Sheet

PE45347

Mechanical Specifications

Size

| | |
|---------------|--------------------|
| Length | 0.56 in [14.22 mm] |
| Width/Dia. | 0.26 in [6.60 mm] |
| Height | 0.63 in [16 mm] |
| Weight | 0.01 lbs [4.54 g] |
| Mating Cycles | 1,000 Cycles |

Material Specifications

| Description | Material | Plating |
|-------------|----------------------------|----------------------------|
| Contact | Beryllium Copper | Gold 51.18µ in. minimum |
| Insulation | PTFE | |
| Body | Passivated Stainless Steel | |
| Gasket | Silicone Rubber | |

Environmental Specifications

Temperature

| | |
|-----------------|-------------------|
| Operating Range | -65 to +125 deg C |
|-----------------|-------------------|

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BMA Plug Slide-On Connector Solder Attachment 2 Hole Flange Mount Stub Terminal, .481 inch Hole Spacing, .010 inch Diameter PE45347](#)



BMA Plug Slide-On Connector Solder Attachment 2 Hole Flange
Mount Stub Terminal, .481 inch Hole Spacing, .010 inch Diameter

RF Connectors Technical Data Sheet

PE45347

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

BMA Plug Slide-On Connector Solder Attachment 2 Hole Flange Mount Stub Terminal, .481 inch Hole Spacing, .010 inch Diameter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BMA Plug Slide-On Connector Solder Attachment 2 Hole Flange Mount Stub Terminal, .481 inch Hole Spacing, .010 inch Diameter PE45347](#)

URL: <https://www.pasternack.com/bma-plug-slide-on-stub-terminal-connector-pe45347-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE45347 CAD Drawing

BMA Plug Slide-On Connector Solder Attachment 2 Hole Flange Mount
Stub Terminal, .481 inch Hole Spacing, .010 inch Diameter

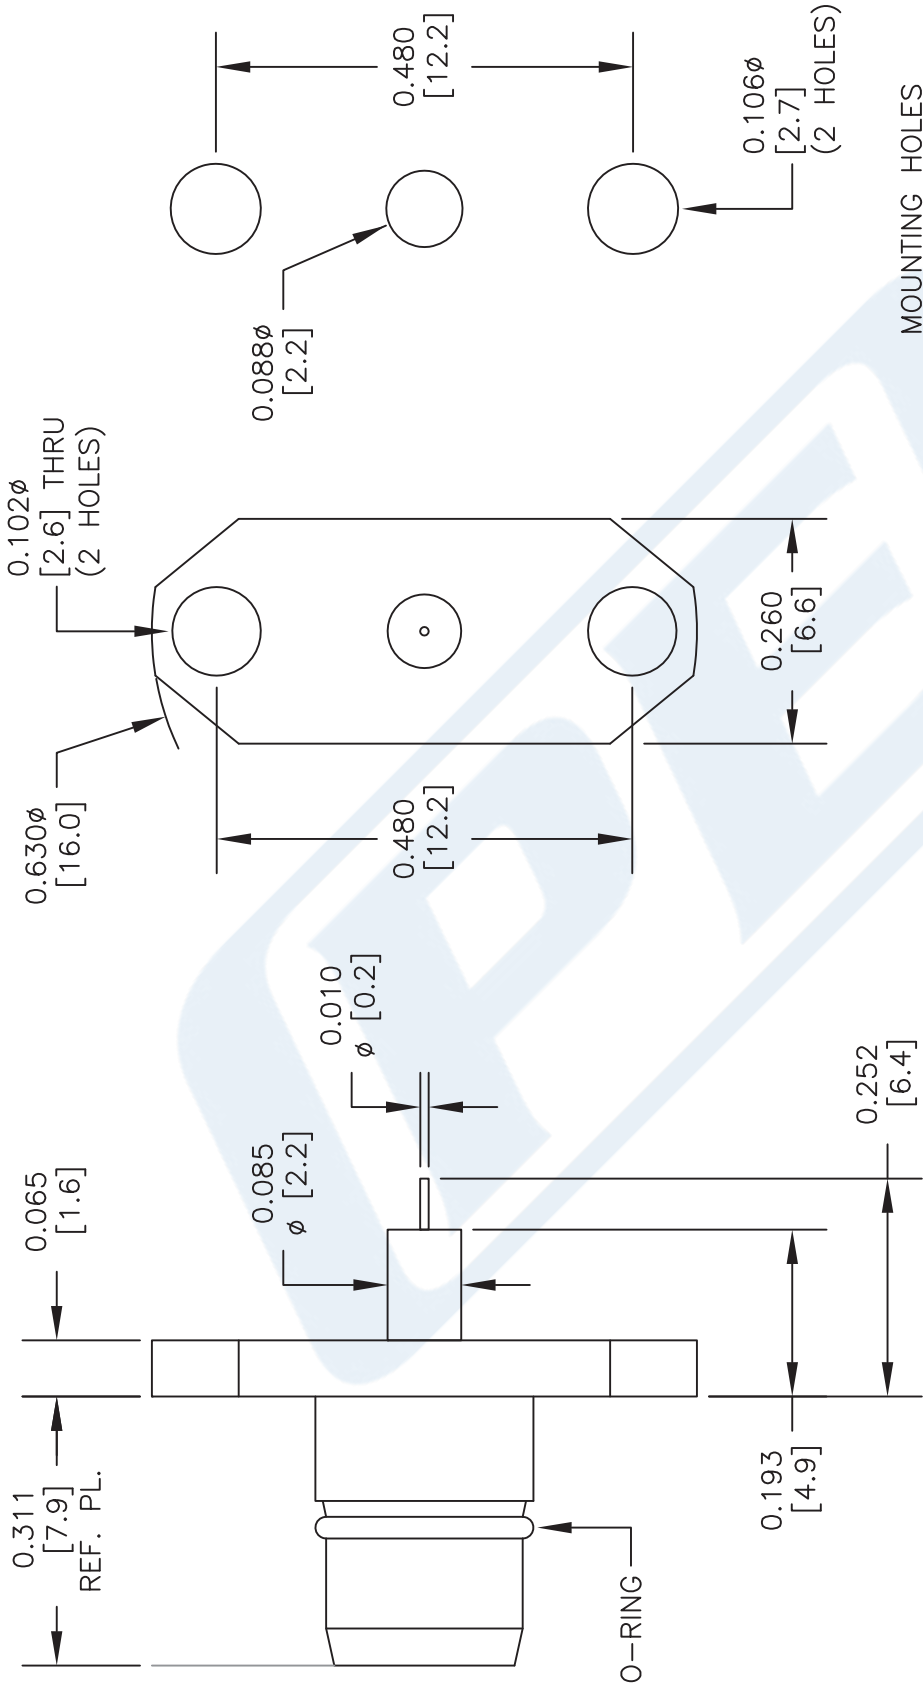

STANDARD TOLERANCES

.X ±0.2
.XX ±0.1
.XXX ±0.05

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES



PASTERNAK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE45347

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE 021417

SCALE N/A

SIZE A

2233