

SMB Plug Right Angle to BNC Male Right Angle Cable Using RG174 Coax, LF Solder

PE33721LF




Configuration

- Connector 1: SMB Plug Right Angle
- Connector 2: BNC Male Right Angle
- Cable Type: RG174
- Coax Flex Type: Flexible

Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

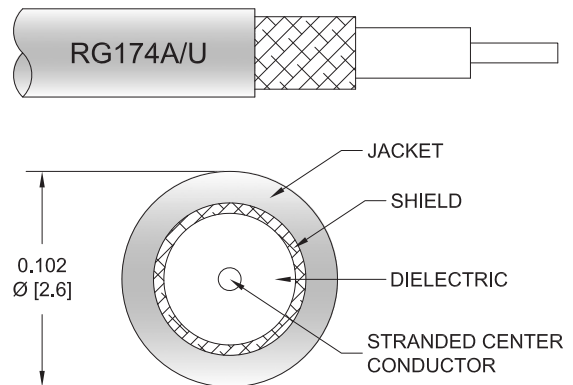

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE33721LF SMB plug right angle to BNC male right angle cable using RG174 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMB to BNC cable assembly has a plug to male gender configuration with 50 ohm flexible RG174 coax. The PE33721LF SMB plug to BNC male cable assembly operates to 1 GHz. The right angle SMB and right angle BNC interfaces on the RG174 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
Velocity of Propagation		66		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]

Specifications by Frequency

SMB Plug Right Angle to BNC Male Right Angle Cable Using RG174 Coax, LF Solder



PE33721LF

Part Number	Length	Description	F1	F2	F3	F4	Units	Weight (lbs)
		Frequency	100	250	500	1000	MHz	
PE33721LF	Custom Lengths Available	Insertion Loss (Typ.)	0.08	0.14	0.21	0.32	dB/ft	
			0.28	0.45	0.7	1.05	dB/m	
PE33721LF-12	12 inch	Insertion Loss (Typ.)	0.49	0.54	0.62	0.72	dB	0.074
PE33721LF-24	24 inch	Insertion Loss (Typ.)	0.57	0.68	0.83	1.04	dB	0.083
PE33721LF-36	36 inch	Insertion Loss (Typ.)	0.66	0.82	1.04	1.36	dB	0.092
PE33721LF-48	48 inch	Insertion Loss (Typ.)	0.74	0.95	1.25	1.68	dB	0.101
PE33721LF-72	72 inch	Insertion Loss (Typ.)	0.91	1.23	1.67	2.32	dB	0.119

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.2 dB
Loss due to Connector 2:	0.2 dB
Base Weight:	0.074 pounds
Additional Weight per Inch:	0.00075 pounds

Mechanical Specifications

Cable Assembly

Weight	0.074 lbs [33.57 g]
--------	---------------------

Cable

Cable Type	RG174
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE (LD)
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.1 in [2.54 mm]

SMB Plug Right Angle to BNC Male Right Angle Cable Using RG174 Coax, LF Solder

PE33721LF



Connectors

Description	Connector 1	Connector 2
Type	SMB Plug Right Angle	BNC Male Right Angle
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Right Angle
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Brass, Nickel	
Outer Conductor Plating Specification	100 µin minimum	
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum

Environmental Specifications

Operating Range Temperature -40 to +80 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

SMB Plug Right Angle to BNC Male Right Angle Cable Using RG174 Coax, LF Solder



PE33721LF

Typical Performance Data

How to Order

Part Number Configuration:

PE33721LF **- xx** **uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length

Base Number

Example: PE33721LF-12 = 12 inches long cable
 PE33721LF-100cm = 100 cm long cable


SMB Plug Right Angle to BNC Male Right Angle Cable Using RG174 Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug Right Angle to BNC Male Right Angle Cable Using RG174 Coax, LF Solder PE33721LF](#)

URL: <https://www.pasternack.com/smb-plug-right-angle-to-bnc-male-cable-using-rg174-lf-solder-pe33721lf-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE33721LF CAD Drawing
SMB Plug Right Angle to BNC Male Right Angle Cable Using RG174 Coax, LF Solder

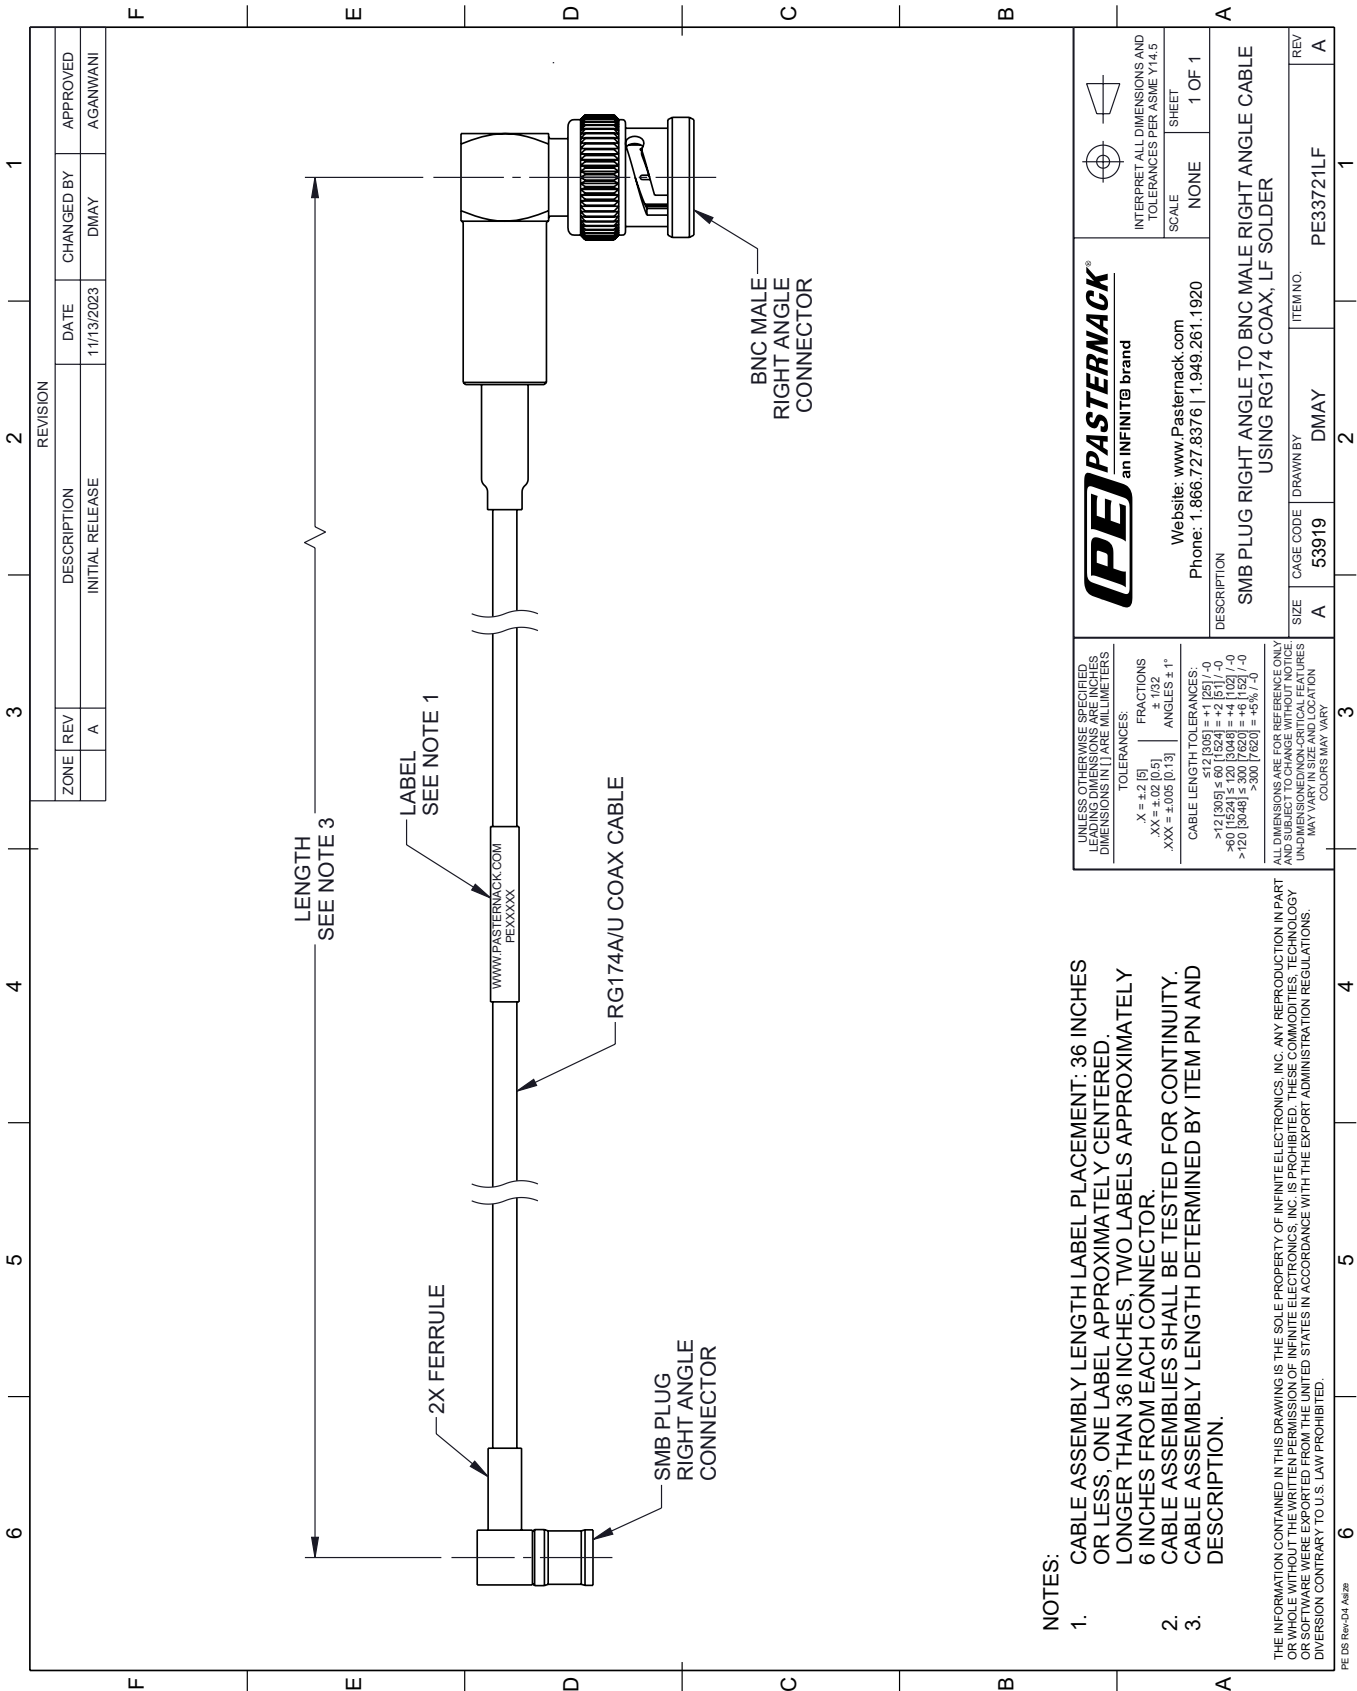

- 1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS; ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
- 2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
- 3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.