



SMC Plug Right Angle to BNC Female Bulkhead
Cable Using RG174 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet


PE3419LF

Configuration

- Connector 1: SMC Plug Right Angle
- Connector 2: BNC Female Bulkhead
- Cable Type: RG174

Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

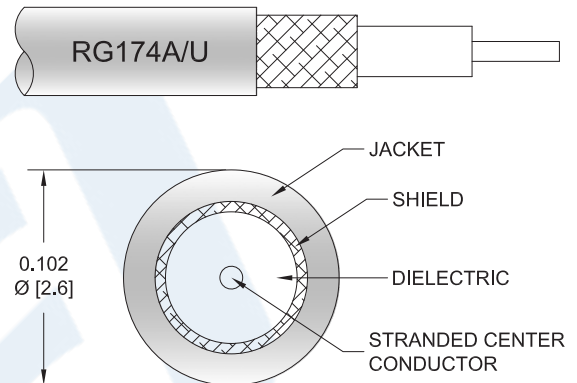

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3419LF SMC plug right angle to BNC female bulkhead cable using RG174 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMC to BNC cable assembly has a plug to female gender configuration with 50 ohm flexible RG174 coax. The PE3419LF SMC plug to BNC female cable assembly operates to 1 GHz. The right angle SMC interface on the RG174 cable allows for easier connections in tight spaces. Our RF cable assembly with BNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMC Plug Right Angle to BNC Female Bulkhead Cable Using RG174 Coax , LF Solder PE3419LF](#)



SMC Plug Right Angle to BNC Female Bulkhead
Cable Using RG174 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3419LF

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		31.08 [101.97]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	100	250	400	500	1,000	MHz
Insertion Loss (Typ.)	0.084	0.137	0.19	0.211	0.32	dB/ft
	0.28	0.45	0.62	0.69	1.05	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly

Weight 0.077 lbs [34.93 g]

Cable

Cable Type RG174
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper Clad Steel
Dielectric Type PE
Number of Shields 1
Shield Layer 1 Tinned Copper Braid
Jacket Material PVC, Black
Jacket Diameter 0.11 in [2.79 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMC Plug Right Angle to BNC Female Bulkhead Cable Using RG174 Coax , LF Solder PE3419LF](#)



SMC Plug Right Angle to BNC Female Bulkhead
Cable Using RG174 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3419LF

Connectors

Description	Connector 1	Connector 2
Type	SMC Plug Right Angle	BNC Female Bulkhead
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Nickel
Outer Conductor Plating Specification		100 µin minimum
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 µin minimum	
Hex Size	1/4 inch	
Torque	3 in-lbs [0.34 Nm]	

Environmental Specifications

Temperature

Operating Range -40 to +80 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMC Plug Right Angle to BNC Female Bulkhead Cable Using RG174 Coax , LF Solder PE3419LF](#)



SMC Plug Right Angle to BNC Female Bulkhead
Cable Using RG174 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3419LF

How to Order

Part Number Configuration:

PE3419LF

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3419LF-12 = 12 inches long cable
PE3419LF-100cm = 100 cm long cable

SMC Plug Right Angle to BNC Female Bulkhead Cable Using RG174 Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMC Plug Right Angle to BNC Female Bulkhead Cable Using RG174 Coax , LF Solder PE3419LF](https://www.pasternack.com/smc-plug-right-angle-to-bnc-female-bulkhead-cable-using-rg174-lf-solder-pe3419lf-p.aspx)

URL: <https://www.pasternack.com/smc-plug-right-angle-to-bnc-female-bulkhead-cable-using-rg174-lf-solder-pe3419lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3419LF CAD Drawing

SMC Plug Right Angle to BNC Female Bulkhead Cable Using RG174 Coax , LF Solder

