

BNC Male to N Female Bulkhead Cable Using RG223 Coax, LF Solder




PE3558LF

Configuration

- Connector 1: BNC Male
- Connector 2: N Female Bulkhead
- Cable Type: RG223
- Coax Flex Type: Flexible

Features

- Max Frequency 4 GHz
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

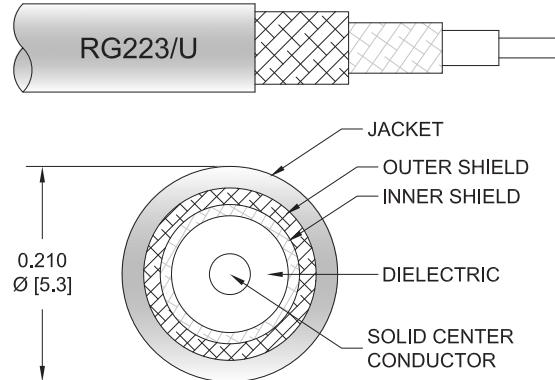

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3558LF BNC male to type N female bulkhead cable using RG223 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to type N cable assembly has a male to female gender configuration with 50 ohm flexible RG223 coax. The PE3558LF BNC male to type N female cable assembly operates to 4 GHz. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	
Velocity of Propagation	66			%
Capacitance	30.8 [101.05]			pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

Specifications by Frequency

BNC Male to N Female Bulkhead Cable Using RG223 Coax, LF Solder



PE3558LF

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	100	250	500	1000	4000	MHz	
PE3558LF	Custom Lengths Available	Insertion Loss (Typ.)	0.02	0.06	0.09	0.13	0.208	dB/ft	
			0.07	0.19	0.3	0.44	0.69	dB/m	
PE3558LF-12	12 inch	Insertion Loss (Typ.)	0.22	0.26	0.29	0.34	0.41	dB	0.145
PE3558LF-24	24 inch	Insertion Loss (Typ.)	0.24	0.32	0.38	0.47	0.62	dB	0.177
PE3558LF-36	36 inch	Insertion Loss (Typ.)	0.26	0.37	0.47	0.61	0.83	dB	0.208
PE3558LF-60	60 inch	Insertion Loss (Typ.)	0.3	0.48	0.65	0.87	1.24	dB	0.27
PE3558LF-72	72 inch	Insertion Loss (Typ.)	0.32	0.54	0.74	1.01	1.45	dB	0.301

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB

Loss due to Connector 2: 0.1 dB

Base Weight: 0.145 pounds

Additional Weight per Inch: 0.00259 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter 0.5 in [12.7 mm]
Weight 0.145 lbs [65.77 g]

Cable

Cable Type	RG223
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.209 in [5.31 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]

BNC Male to N Female Bulkhead Cable Using RG223 Coax, LF Solder



PE3558LF

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	N Female Bulkhead
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 μ in minimum	30 μ in minimum
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Nickel
Outer Conductor Plating Specification		100 μ in minimum
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 μ in minimum	

Environmental Specifications

Operating Range Temperature -40 to +80 deg C

Compliance Certifications

(see [product page](#) for current document)

Plotted and Other Data

Notes:

BNC Male to N Female Bulkhead Cable Using RG223 Coax, LF Solder




PE3558LF

Typical Performance Data

How to Order

Part Number Configuration:

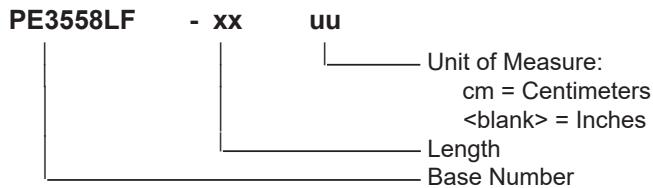

Example: PE3558LF-12 = 12 inches long cable
PE3558LF-100cm = 100 cm long cable

BNC Male to N Female Bulkhead Cable Using RG223 Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to N Female Bulkhead Cable Using RG223 Coax, LF Solder PE3558LF](#)

URL: <https://www.pasternack.com/bnc-male-to-n-female-bulkhead-cable-using-rg223-lf-solder-pe3558lf-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3558LF CAD Drawing

BNC Male to N Female Bulkhead Cable Using RG223 Coax, LF Solder

