



BNC Male Right Angle to SMB Plug Cable
Using RG316 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet


PE35650LF

Configuration

- Connector 1: BNC Male Right Angle
- Connector 2: SMB Plug
- Cable Type: RG316
- Coax Flex Type: Flexible

Features

- Max Frequency 2 GHz
- 69% Phase Velocity
- FEP Jacket

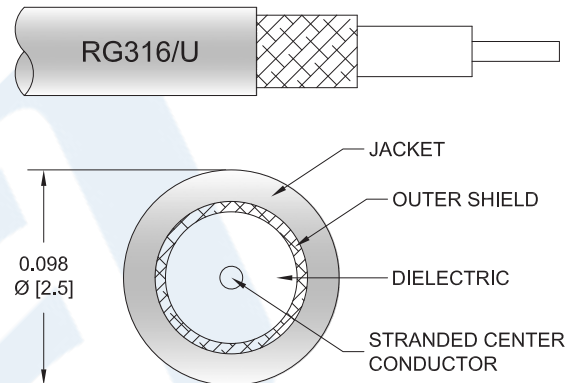

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE35650LF BNC male right angle to SMB plug cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to SMB cable assembly has a male to plug gender configuration with 50 ohm flexible RG316 coax. The PE35650LF BNC male to SMB plug cable assembly operates to 2 GHz. The right angle BNC interface on the RG316 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male Right Angle to SMB Plug Cable Using RG316 Coax , LF Solder PE35650LF](#)



BNC Male Right Angle to SMB Plug Cable
Using RG316 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE35650LF

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		2	GHz
VSWR			1.4:1	
Velocity of Propagation		69		%
Jacket Spark			2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.05	0.1	0.25	0.5	2	GHz
Insertion Loss (Typ.)	0.075	0.11	0.16	0.238	0.48	dB/ft
	0.25	0.36	0.52	0.78	1.57	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the SMB connector and 0.2 dB for the BNC connector.

Mechanical Specifications

Cable Assembly

Weight 0.074 lbs [33.57 g]

Cable

Cable Type RG316
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 1
Shield Layer 1 Silver Plated Copper Braid
Jacket Material FEP, Tan
Jacket Diameter 0.098 in [2.49 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male Right Angle to SMB Plug Cable Using RG316 Coax , LF Solder PE35650LF](#)



BNC Male Right Angle to SMB Plug Cable
Using RG316 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE35650LF

Connectors

Description	Connector 1	Connector 2
Type	BNC Male Right Angle	SMB Plug
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	30 μ in minimum	30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 μ in minimum	100 μ in minimum

Environmental Specifications

Temperature

Operating Range -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male Right Angle to SMB Plug Cable Using RG316 Coax , LF Solder PE35650LF](#)



BNC Male Right Angle to SMB Plug Cable
Using RG316 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE35650LF

How to Order

Part Number Configuration:

PE35650LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE35650LF-12 = 12 inches long cable
PE35650LF-100cm = 100 cm long cable

BNC Male Right Angle to SMB Plug Cable Using RG316 Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male Right Angle to SMB Plug Cable Using RG316 Coax , LF Solder PE35650LF](#)

URL: <https://www.pasternack.com/bnc-male-right-angle-to-smb-plug-cable-using-rg316-lf-solder-pe35650lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE35650LF CAD Drawing

BNC Male Right Angle to SMB Plug Cable Using RG316 Coax , LF Solder

