

## BNC Male to BNC Male Low Loss Cable Using LMR-240-UF Coax




### PE3C0989

#### Configuration

- Connector 1: BNC Male
- Connector 2: BNC Male
- Cable Type: LMR-240-UF
- Coax Flex Type: Flexible

#### Features

- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- TPE Jacket

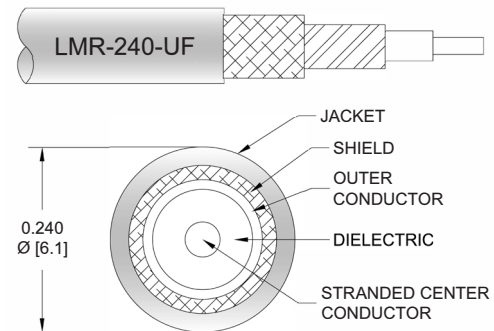

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C0989 BNC male to BNC male cable using LMR-240-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to BNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240-UF coax. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

| Description                   | Minimum | Typical      | Maximum | Units                 |
|-------------------------------|---------|--------------|---------|-----------------------|
| VSWR                          |         |              | 1.4:1   |                       |
| Velocity of Propagation       |         | 84           |         | %                     |
| RF Shielding                  | 90      |              |         | dB                    |
| Group Delay                   |         | 1.21 [3.97]  |         | ns/ft [ns/m]          |
| Capacitance                   |         | 24.2 [79.4]  |         | pF/ft [pF/m]          |
| Inductance                    |         | 0.06 [0.2]   |         | uH/ft [uH/m]          |
| DC Resistance Inner Conductor |         | 4.28 [14.04] |         | Ohms/1000ft [Ohms/Km] |
| DC Resistance Outer Conductor |         | 3.89 [12.76] |         | Ohms/1000ft [Ohms/Km] |
| Jacket Spark                  |         |              | 5,000   | Vrms                  |

Electrical Specification Notes:  
Values at 25°C, sea level.

## BNC Male to BNC Male Low Loss Cable Using LMR-240-UF Coax



### PE3C0989

#### Mechanical Specifications

##### Cable Assembly

|                |                   |
|----------------|-------------------|
| Width/Diameter | 0.5 in [12.7 mm]  |
| Weight         | 0.1 lbs [45.36 g] |

##### Cable

|                                      |                        |
|--------------------------------------|------------------------|
| Cable Type                           | LMR-240-UF             |
| Impedance                            | 50 Ohms                |
| Inner Conductor Type                 | Stranded               |
| Inner Conductor Material and Plating | Copper                 |
| Dielectric Type                      | PE (F)                 |
| Number of Shields                    | 2                      |
| Shield Layer 1                       | Aluminum Tape          |
| Shield Layer 2                       | Tinned Copper Braid    |
| Jacket Material                      | TPE, Black             |
| Jacket Diameter                      | 0.24 in [6.1 mm]       |
| One Time Minimum Bend Radius         | 0.75 in [19.05 mm]     |
| Repeated Minimum Bend Radius         | 2.5 in [63.5 mm]       |
| Bending Moment                       | 0.13 lbs-ft [0.18 N-m] |
| Flat Plate Crush                     | 13 lbs/in [0.23 Kg/mm] |
| Tensile Strength                     | 80 lbs [36.29 Kg]      |

#### Connectors

| Description                        | Connector 1     | Connector 2     |
|------------------------------------|-----------------|-----------------|
| Type                               | BNC Male        | BNC Male        |
| Specification                      | MIL-STD-348A    | MIL-STD-348A    |
| Impedance                          | 50 Ohms         | 50 Ohms         |
| Configuration                      | Straight        | Straight        |
| Contact Material and Plating       | Brass, Gold     | Brass, Gold     |
| Contact Plating Specification      | 3 µin minimum   | 3 µin minimum   |
| Dielectric Type                    | PTFE            | PTFE            |
| Body Material and Plating          | Brass, Nickel   | Brass, Nickel   |
| Body Plating Specification         | 100 µin minimum | 100 µin minimum |
| Coupling Nut Material and Plating  | Brass, Nickel   | Brass, Nickel   |
| Coupling Nut Plating Specification | 100 µin minimum | 100 µin minimum |

#### Environmental Specifications

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:  
Values at 25°C, sea level.

BNC Male to BNC Male Low Loss Cable  
Using LMR-240-UF Coax



**PE3C0989**

**Typical Performance Data**


**How to Order**

Part Number Configuration:

**PE3C0989**

**- xx**

**uu**

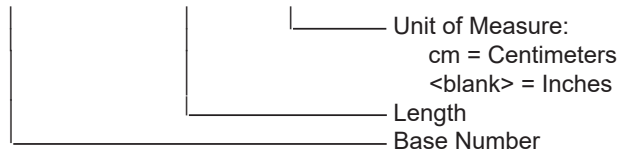

Example: PE3C0989-12 = 12 inches long cable  
PE3C0989-100cm = 100 cm long cable

BNC Male to BNC Male Low Loss Cable Using LMR-240-UF Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Low Loss Cable Using LMR-240-UF Coax PE3C0989](#)

URL: <https://www.pasternack.com/bnc-male-to-bnc-male-low-loss-cable-using-lmr-240-uf-pe3c0989-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C0989 CAD Drawing

BNC Male to BNC Male Low Loss Cable Using LMR-240-UF Coax

