

## BNC Female Bulkhead to BNC Female Bulkhead Non-Magnetic Cable Using PE-141FL-NM Coax




### PE3C10832

#### Configuration

- Connector 1: BNC Female Bulkhead
- Connector 2: BNC Female Bulkhead
- Cable Type: PE-141FL-NM
- Coax Flex Type: Formable

#### Features

- Max Frequency 4 GHz
- Shielding Effectivity > 90 dB
- 70% Phase Velocity
- Copper Jacket
- 500 Mating Cycles

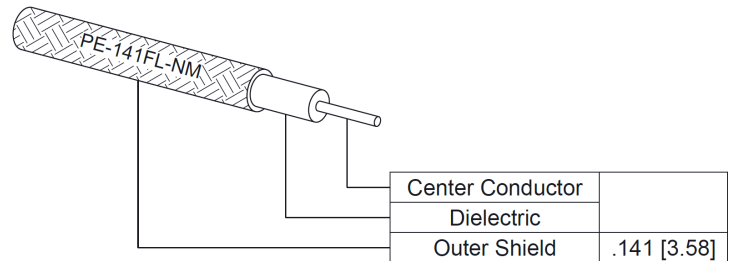

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C10832 BNC female bulkhead to BNC female bulkhead cable using PE-141FL-NM coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack BNC to BNC cable assembly has a female to female gender configuration with 50 ohm formable PE-141FL-NM coax. The PE3C10832 BNC female to BNC female cable assembly operates to 4 GHz. Our RF cable assembly with BNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
RF Shielding	90			dB
Operating Voltage (AC)			500	Vrms

#### Specifications by Frequency

BNC Female Bulkhead to BNC Female Bulkhead  
Non-Magnetic Cable Using PE-141FL-NM Coax



**PE3C10832**

Part Number	Length	Description	F1	F2	F3	F4	Units	Weight (lbs)
			Frequency	500	1000	2500	4000	
PE3C10832	Custom Lengths Available	Insertion Loss (Typ.)	0.112	0.162	0.248	0.334	dB/ft	
			0.37	0.54	0.82	1.1	dB/m	
PE3C10832-6	6 inch	Insertion Loss (Typ.)	0.46	0.49	0.53	0.57	dB	0.787
PE3C10832-12	12 inch	Insertion Loss (Typ.)	0.52	0.57	0.65	0.74	dB	1.447
PE3C10832-24	24 inch	Insertion Loss (Typ.)	0.63	0.73	0.9	1.07	dB	2.767
PE3C10832-36	36 inch	Insertion Loss (Typ.)	0.74	0.89	1.15	1.41	dB	4.087
PE3C10832-60	60 inch	Insertion Loss (Typ.)	0.96	1.21	1.64	2.07	dB	6.727

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.2 dB  
 Loss due to Connector 2: 0.2 dB  
 Base Weight: 1.447 pounds  
 Additional Weight per Inch: 0.11 pounds

**Mechanical Specifications**

**Cable Assembly**

Width/Diameter 0.5 in [12.7 mm]  
 Weight 1.447 lbs [656.35 g]

**Cable**

Cable Type PE-141FL-NM  
 Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Silver Plated Copper  
 Dielectric Type PTFE  
 Number of Shields 1  
 Outer Conductor 1 Material and Plating Copper-Tin Composite  
 Jacket Material Copper  
 Repeated Minimum Bend Radius 0.375 in [9.53 mm]

**Connectors**

Description	Connector 1	Connector 2
Type	BNC Female Bulkhead	BNC Female Bulkhead
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles	500	500
Contact Material and Plating	Beryllium Copper, Gold over Copper	Beryllium Copper, Gold over Copper
Body Material and Plating	BZ4, Copper-Tin-Zinc Alloy	BZ4, Copper-Tin-Zinc Alloy

**Environmental Specifications**

Operating Range Temperature -55 to +165 deg C

## BNC Female Bulkhead to BNC Female Bulkhead Non-Magnetic Cable Using PE-141FL-NM Coax



### PE3C10832

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

#### Typical Performance Data

#### How to Order

Part Number Configuration:

**PE3C10832**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C10832-12 = 12 inches long cable  
PE3C10832-100cm = 100 cm long cable

BNC Female Bulkhead to BNC Female Bulkhead Non-Magnetic Cable Using PE-141FL-NM Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Female Bulkhead to BNC Female Bulkhead Non-Magnetic Cable Using PE-141FL-NM Coax PE3C10832](#)

URL: <https://www.pasternack.com/bnc-jack-bulkhead-to-bnc-jack-bulkhead-non-magnetic-cable-using-pe-141fl-nm-pe3c10832-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C10832 CAD Drawing

BNC Female Bulkhead to BNC Female Bulkhead Non-Magnetic Cable Using PE-141FL-NM Coax

