

SMA Male Right Angle to SMA Male Low Loss Cable Using LMR-240-UF Coax, LF Solder




PE3C1952LF

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Male
- Cable Type: LMR-240-UF
- Coax Flex Type: Flexible

Features

- Max Frequency 8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- TPE Jacket

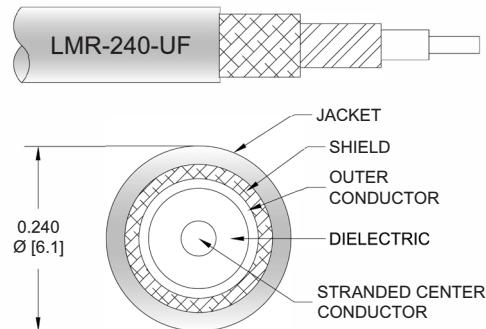

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C1952LF SMA male right angle to SMA male cable using LMR-240-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240-UF coax. The PE3C1952LF SMA male to SMA male cable assembly operates to 8 GHz. The right angle SMA interface on the LMR-240-UF cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|--------------|---------|-----------------------|
| Frequency Range | DC | | 8 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 84 | | % |
| RF Shielding | 90 | | | dB |
| Group Delay | | 1.21 [3.97] | | ns/ft [ns/m] |
| Capacitance | | 24.2 [79.4] | | pF/ft [pF/m] |
| Inductance | | 0.06 [0.2] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 4.28 [14.04] | | Ohms/1000ft [Ohms/Km] |
| DC Resistance Outer Conductor | | 3.89 [12.76] | | Ohms/1000ft [Ohms/Km] |

SMA Male Right Angle to SMA Male Low Loss Cable Using LMR-240-UF Coax, LF Solder



PE3C1952LF

Electrical Specifications

| Description | Minimum | Typical | | | | Maximum | Units |
|--------------|---------|---------|--|--|-------|---------|-------|
| Jacket Spark | | | | | 5,000 | | Vrms |

Specifications by Frequency

| Part Number | Length | Description | F1 | F2 | F3 | F4 | F5 | Units | Weight (lbs) |
|----------------|--------------------------|-----------------------|-------|-------|-------|-------|-------|-------|--------------|
| | | Frequency | 500 | 1000 | 2000 | 4000 | 8000 | MHz | |
| PE3C1952LF | Custom Lengths Available | Insertion Loss (Typ.) | 0.066 | 0.096 | 0.138 | 0.155 | 0.244 | dB/ft | |
| | | | 0.22 | 0.32 | 0.46 | 0.51 | 0.81 | dB/m | |
| PE3C1952LF-12 | 12 inch | Insertion Loss (Typ.) | 0.37 | 0.4 | 0.44 | 0.46 | 0.55 | dB | 0.068 |
| PE3C1952LF-24 | 24 inch | Insertion Loss (Typ.) | 0.44 | 0.5 | 0.58 | 0.61 | 0.79 | dB | 0.101 |
| PE3C1952LF-36 | 36 inch | Insertion Loss (Typ.) | 0.5 | 0.59 | 0.72 | 0.77 | 1.04 | dB | 0.133 |
| PE3C1952LF-60 | 60 inch | Insertion Loss (Typ.) | 0.63 | 0.78 | 0.99 | 1.08 | 1.52 | dB | 0.197 |
| PE3C1952LF-300 | 300 inch | Insertion Loss (Typ.) | 1.95 | 2.7 | 3.75 | 4.18 | 6.4 | dB | 0.837 |

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.2 dB
Loss due to Connector 2: 0.1 dB
Base Weight: 0.068 pounds
Additional Weight per Inch: 0.00267 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter 0.5 in [12.7 mm]
Weight 0.068 lbs [30.84 g]

Cable

Cable Type LMR-240-UF
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper
Dielectric Type PE (F)
Number of Shields 2
Shield Layer 1 Aluminum Tape
Shield Layer 2 Tinned Copper Braid
Jacket Material TPE, Black
Jacket Diameter 0.24 in [6.1 mm]
One Time Minimum Bend Radius 0.75 in [19.05 mm]
Repeated Minimum Bend Radius 2.5 in [63.5 mm]
Bending Moment 0.13 lbs-ft [0.18 N-m]
Flat Plate Crush 13 lbs/in [0.23 Kg/mm]
Tensile Strength 80 lbs [36.29 Kg]

SMA Male Right Angle to SMA Male Low Loss Cable Using LMR-240-UF Coax, LF Solder



PE3C1952LF

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|----------------------|------------------|
| Type | SMA Male Right Angle | SMA Male |
| Impedance | 50 Ohms | 50 Ohms |
| Configuration | Right Angle | Straight |
| Mating Cycles | | 500 |
| Contact Material and Plating | Brass, Gold | Brass, Gold |
| Contact Plating Specification | 50 μ in minimum | |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Gold | Brass, Gold |
| Body Plating Specification | 3 μ in minimum | |
| Coupling Nut Material and Plating | Brass, Gold | Brass, Gold |
| Coupling Nut Plating Specification | 3 μ in minimum | |
| Hex Size | 5/16 inch | 5/16 inch |
| Torque | 3 in-lbs 0.34 Nm | 3 in-lbs 0.34 Nm |

Environmental Specifications

Operating Range Temperature -40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

SMA Male Right Angle to SMA Male Low Loss Cable Using LMR-240-UF Coax, LF Solder




PE3C1952LF

Typical Performance Data

How to Order

Part Number Configuration:

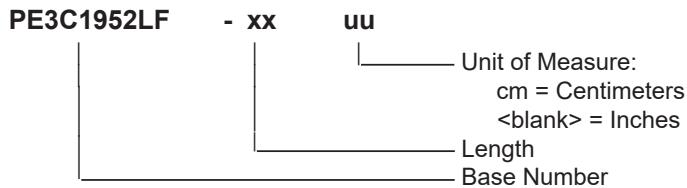

Example: PE3C1952LF-12 = 12 inches long cable
PE3C1952LF-100cm = 100 cm long cable

SMA Male Right Angle to SMA Male Low Loss Cable Using LMR-240-UF Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Low Loss Cable Using LMR-240-UF Coax, LF Solder PE3C1952LF](#)

URL: <https://www.pasternack.com/sma-male-right-angle-to-sma-male-low-loss-cable-using-lmr-240-uf-lf-solder-pe3c1952lf-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C1952LF CAD Drawing

SMA Male Right Angle to SMA Male Low Loss Cable Using LMR-240-UF Coax, LF Solder

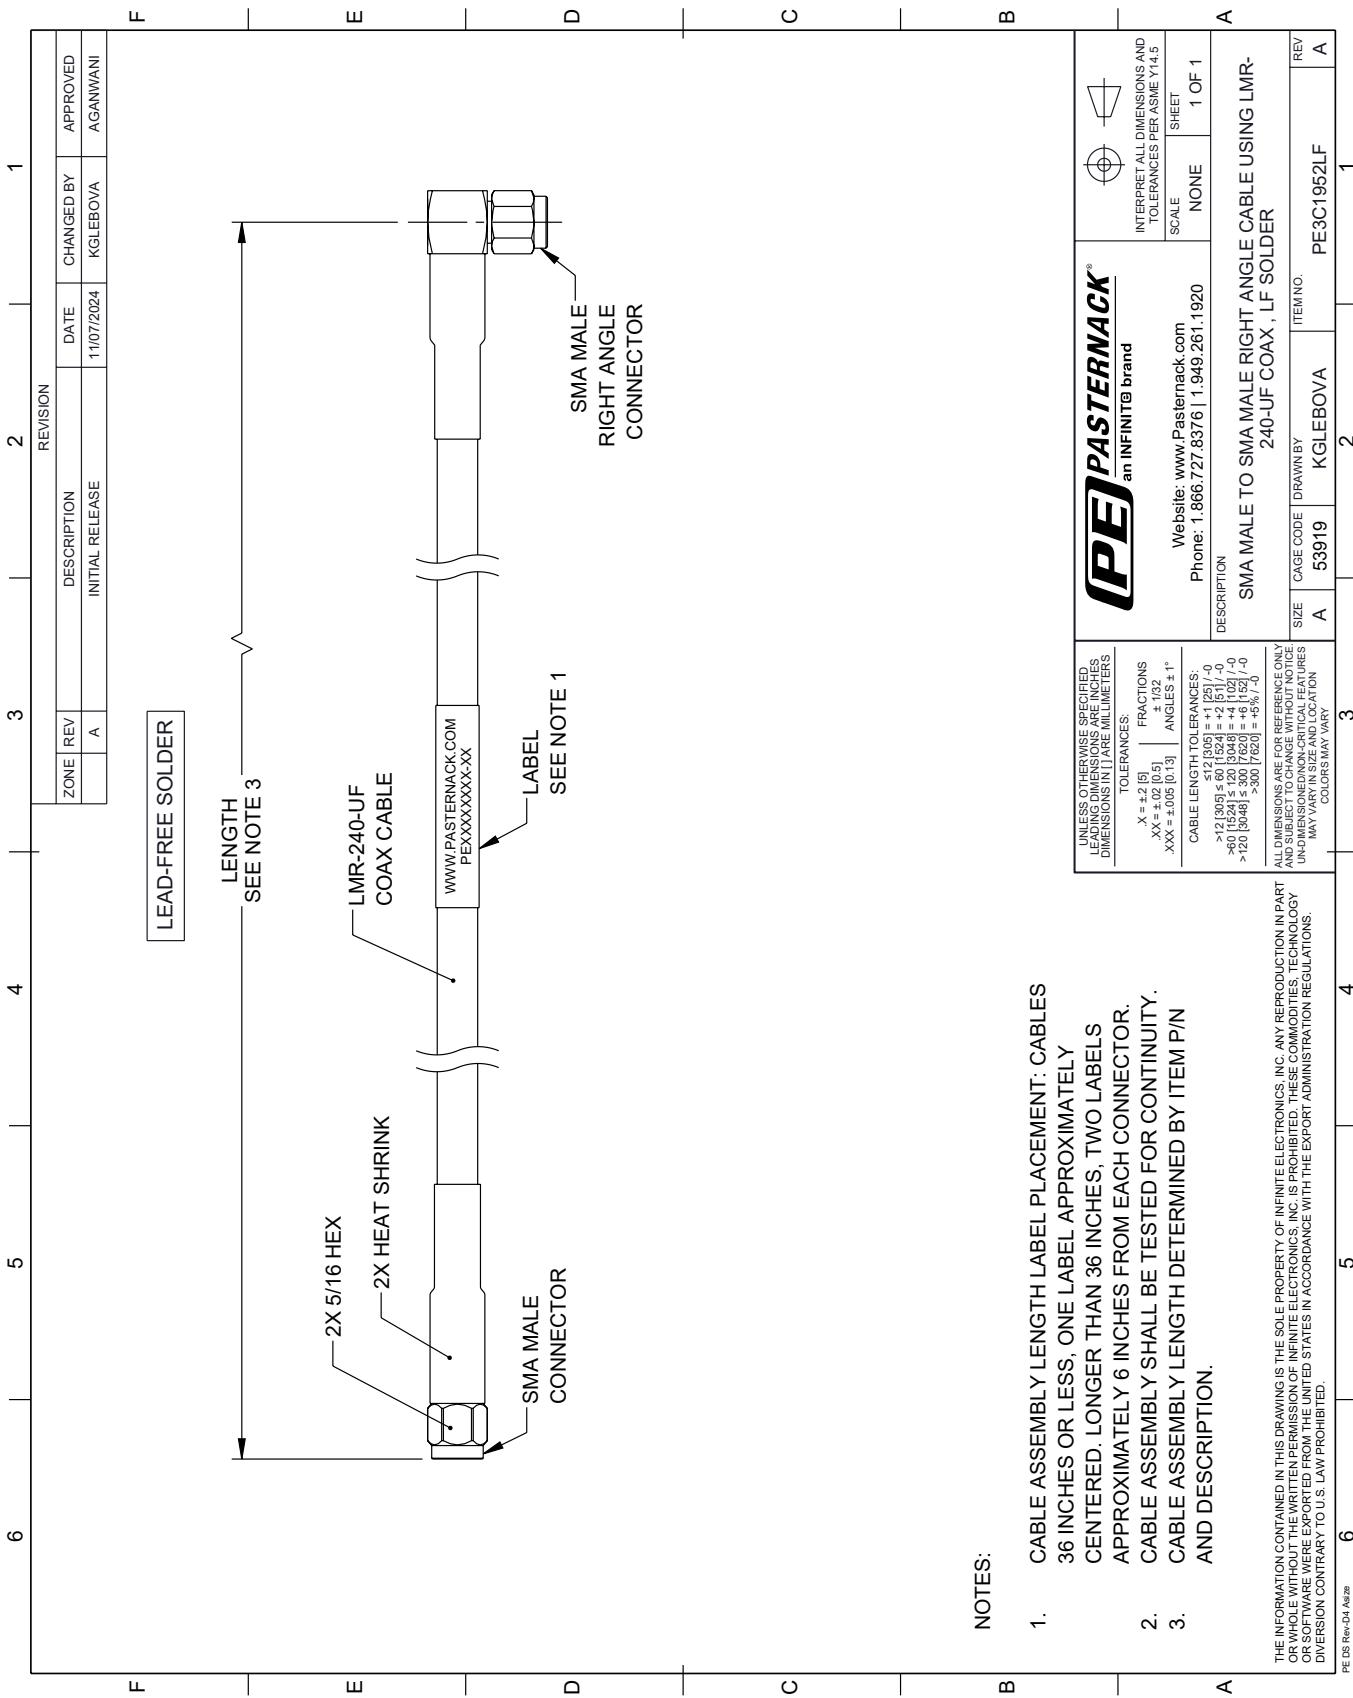

OTES.

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: CABLES 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM P/N AND DESCRIPTION
- 2.
- 3.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.