



N Male to N Male Cable Using RG142 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet


PE3C2255LF

Configuration

- Connector 1: N Male
- Connector 2: N Male
- Cable Type: RG142
- Coax Flex Type: Flexible

Features

- Max Frequency 8 GHz
- Shielding Effectivity > 90 dB
- 70% Phase Velocity
- Double Shielded
- FEP Jacket

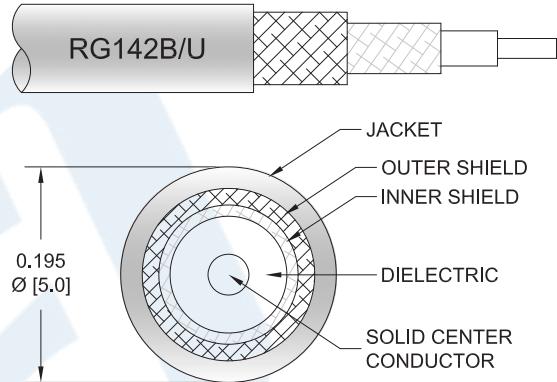

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C2255LF type N male to type N male cable using RG142 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible RG142 coax. The PE3C2255LF type N male to type N male cable assembly operates to 8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Cable Using RG142 Coax , LF Solder PE3C2255LF](#)



N Male to N Male Cable Using RG142 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C2255LF

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
RF Shielding	90			dB
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			1,500	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2	4	5	GHz
Insertion Loss (Typ.)	0.079	0.13	0.184	0.299	0.36	dB/ft
	0.26	0.43	0.6	0.98	1.18	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.178 lbs [80.74 g]

Cable

Cable Type RG142
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 2
 Shield Layer 1 Silver Plated Copper Braid
 Shield Layer 2 Silver Plated Copper Braid
 Jacket Material FEP, Tan
 Jacket Diameter 0.195 in [4.95 mm]

Repeated Minimum Bend Radius 0.984 in [24.99 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Cable Using RG142 Coax , LF Solder PE3C2255LF](#)



N Male to N Male Cable Using RG142 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C2255LF

Connectors

Description	Connector 1	Connector 2
Type	N Male	N Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 μ in minimum	30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Hex Size	18 mm	18 mm
Torque	9 in-lbs [1.02 Nm]	9 in-lbs [1.02 Nm]

Environmental Specifications

Temperature

Operating Range

-55 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Cable Using RG142 Coax , LF Solder PE3C2255LF](#)



N Male to N Male Cable Using RG142 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet**PE3C2255LF****How to Order**

Part Number Configuration:

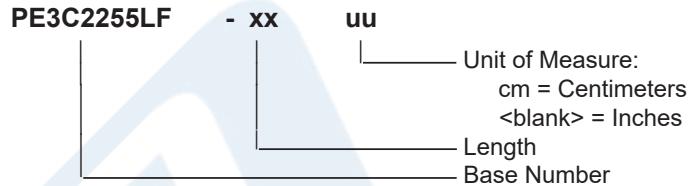

Example: PE3C2255LF-12 = 12 inches long cable
PE3C2255LF-100cm = 100 cm long cable


N Male to N Male Cable Using RG142 Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Cable Using RG142 Coax , LF Solder PE3C2255LF](#)

URL: <https://www.pasternack.com/n-male-to-n-male-cable-using-rg142-lf-solder-pe3c2255lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C2255LF CAD Drawing
N Male to N Male Cable Using RG142 Coax , LF Solder

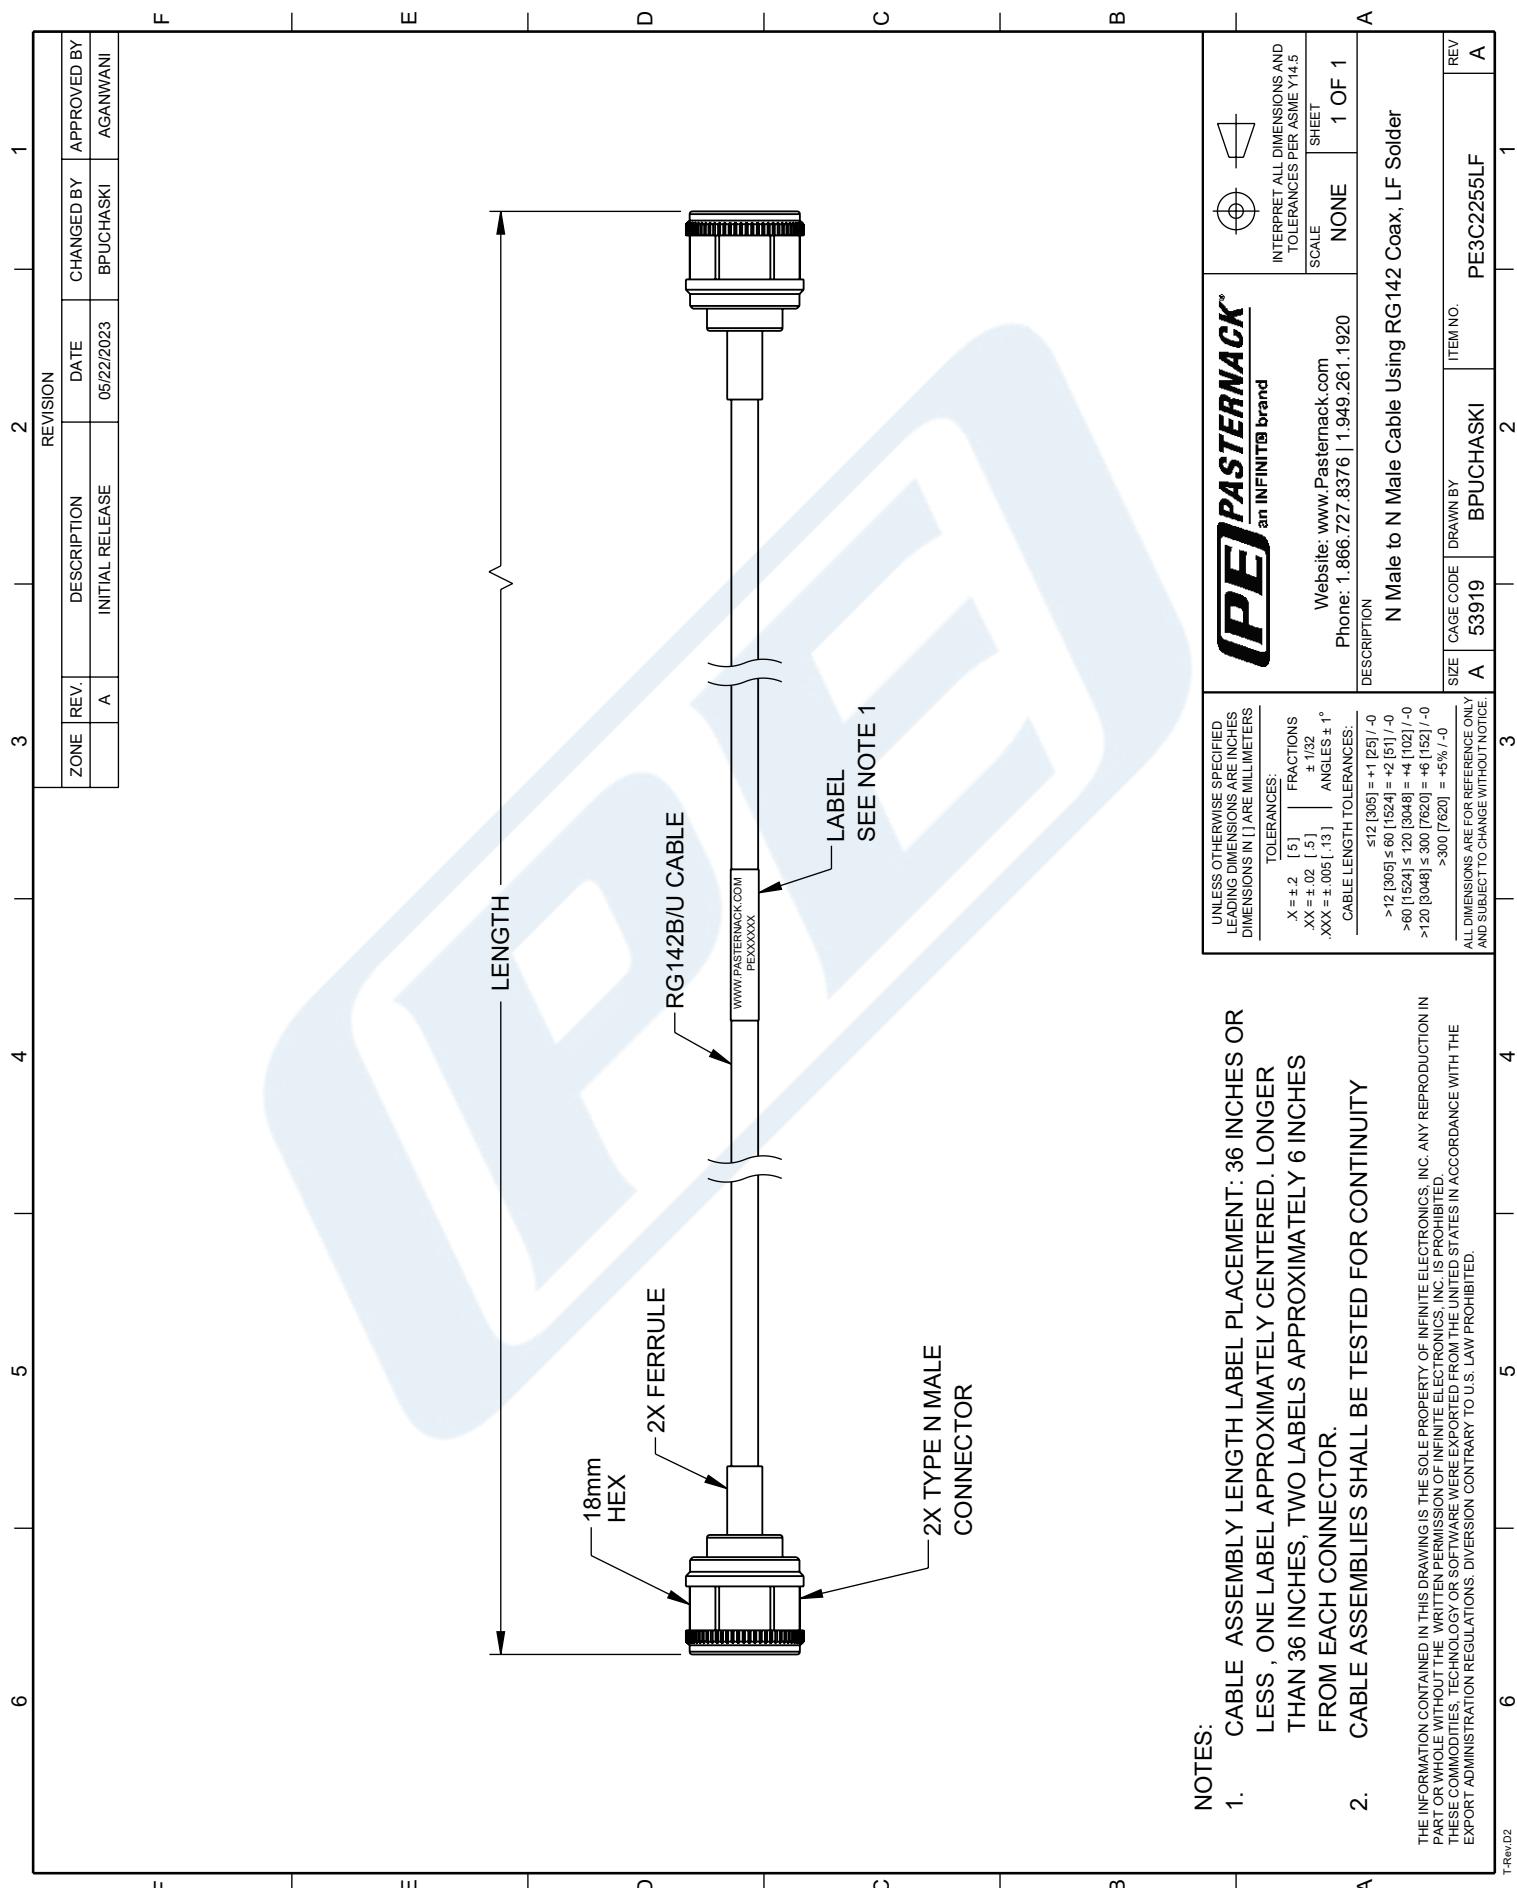

 PASTERNAK an INFINITE® brand		 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
LENGTH		SEE NOTE 1	
DESCRIPTION N Male to N Male Cable Using RG142 Coax, LF Solder	SCALE NONE	ITEM NO. PE3C2255LF	REV A

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
 $X = \pm 0.2$ [5.1] FRACTIONS
 $XX = \pm 0.02$ [.5] $\pm 1/32$
 $XXX = \pm 0.005$ [.13] ANGLES $\pm 1^\circ$

CABLE LENGTH TOLERANCES:
 ± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0

± 12 [305] = ± 1 [25] / -0