

N Male Right Angle to N Female Low Loss Cable
Using LMR-240 Coax with HeatShrink, LF Solder



RF Cable Assemblies Technical Data Sheet


PE3C2519/HS

Configuration

- Connector 1: N Male Right Angle
- Connector 2: N Female
- Cable Type: LMR-240

Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 100 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

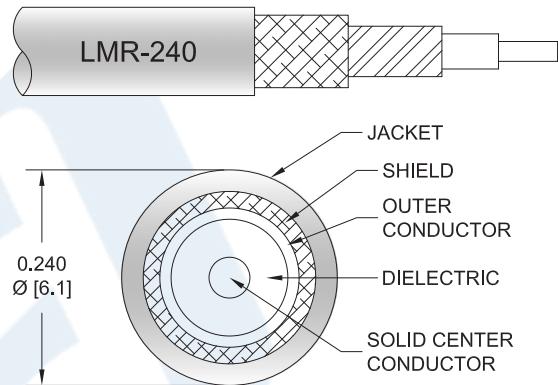

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C2519/HS type N male right angle to type N female cable using LMR-240 coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack type N to type N cable assembly has a male to female gender configuration with 50 ohm formable LMR-240 coax. The PE3C2519/HS type N male to type N female cable assembly operates to 5.8 GHz. The right angle type N interface on the LMR-240 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 100 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink, LF Solder PE3C2519/HS](#)

N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink, LF Solder



RF Cable Assemblies Technical Data Sheet

PE3C2519/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		84		%
RF Shielding	100			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		3.2 [10.5]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ω/1000ft [Ω/Km]
Jacket Spark			5,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.039	0.055	0.079	0.129	0.204	dB/ft
	0.13	0.18	0.26	0.42	0.67	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly

Weight 0.22 lbs [99.79 g]

Cable

Cable Type LMR-240
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper
Dielectric Type PE (F)
Number of Shields 2
Shield Layer 1 Aluminum Tape
Shield Layer 2 Tinned Copper Braid
Jacket Material PE, Black
Jacket Diameter 0.24 in [6.1 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink, LF Solder PE3C2519/HS](#)



N Male Right Angle to N Female Low Loss Cable
Using LMR-240 Coax with HeatShrink, LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C2519/HS

One Time Minimum Bend Radius	0.315 in [8 mm]
Repeated Minimum Bend Radius	1.575 in [40.01 mm]

Connectors

Description	Connector 1	Connector 2
Type	N Male Right Angle	N Female
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification		30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal

Environmental Specifications

Temperature

Operating Range

-65 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink, LF Solder PE3C2519/HS](#)

N Male Right Angle to N Female Low Loss Cable
Using LMR-240 Coax with HeatShrink, LF Solder



RF Cable Assemblies Technical Data Sheet

PE3C2519/HS

How to Order

Part Number Configuration:

PE3C2519/HS - xx uu

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length
Base Number

Example: PE3C2519/HS-12 = 12 inches long cable
PE3C2519/HS-100cm = 100 cm long cable

N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Female Low Loss Cable Using LMR-240 Coax with HeatShrink, LF Solder PE3C2519/HS](#)

URL: <https://www.pasternack.com/n-male-right-angle-to-n-female-low-loss-cable-using-lmr-240-with-heatshrink-lf-solder-pe3c2519-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

