

BNC Male to BNC Female Cable Using RG174 Coax, LF Solder





PE3C3325LF

Configuration

- Connector 1: BNC Male
- Connector 2: BNC Female
- Cable Type: RG174
- Coax Flex Type: Flexible

Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

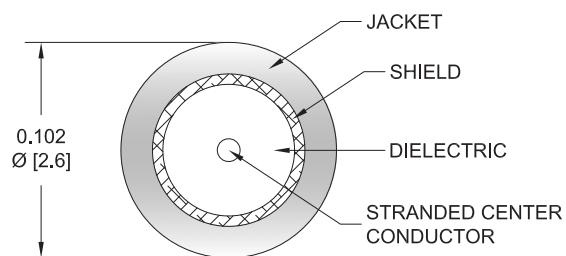

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C3325LF BNC male to BNC female cable is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to BNC cable assembly has a male to female gender configuration with 50 ohm flexible RG174 coax. The PE3C3325LF BNC male to BNC female cable assembly operates to 1 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		31.1 [102.03]		pF/ft [pF/m]

Specifications by Frequency

BNC Male to BNC Female Cable Using RG174 Coax, LF Solder



PE3C3325LF

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	50	100	250	500	1000	MHz	
PE3C3325LF	Custom Lengths Available	Insertion Loss (Typ.)	0.042 0.14	0.084 0.28	0.137 0.45	0.212 0.7	0.32 1.05	dB/ft dB/m	
PE3C3325LF-12	12 inch	Insertion Loss (Typ.)	0.25	0.29	0.34	0.42	0.52	dB	0.058
PE3C3325LF-24	24 inch	Insertion Loss (Typ.)	0.29	0.37	0.48	0.63	0.84	dB	0.067
PE3C3325LF-36	36 inch	Insertion Loss (Typ.)	0.33	0.46	0.62	0.84	1.16	dB	0.076
PE3C3325LF-48	48 inch	Insertion Loss (Typ.)	0.37	0.54	0.75	1.05	1.48	dB	0.085
PE3C3325LF-72	72 inch	Insertion Loss (Typ.)	0.46	0.71	1.03	1.48	2.12	dB	0.103

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB
Loss due to Connector 2: 0.1 dB
Base Weight: 0.058 pounds
Additional Weight per Inch: 0.00075 pounds

Mechanical Specifications

Cable Assembly

Weight 0.058 lbs [26.31 g]

Cable

Cable Type	RG174
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.11 in [2.79 mm]

BNC Male to BNC Female Cable Using RG174 Coax, LF Solder



PE3C3325LF

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	BNC Female
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 μ in minimum	30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 μ in minimum	

Environmental Specifications

Operating Range Temperature

-40 to +80 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

BNC Male to BNC Female Cable Using RG174 Coax, LF Solder




PE3C3325LF

Typical Performance Data

How to Order

Part Number Configuration:

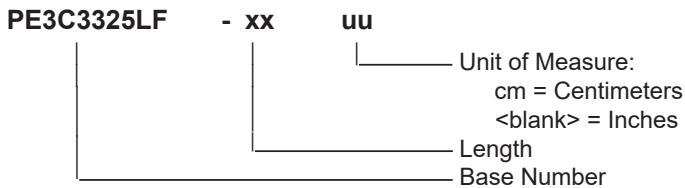

Example: PE3C3325LF-12 = 12 inches long cable
PE3C3325LF-100cm = 100 cm long cable

BNC Male to BNC Female Cable Using RG174 Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Female Cable Using RG174 Coax, LF Solder PE3C3325LF](#)

URL: <https://www.pasternack.com/bnc-male-to-bnc-female-cable-using-rg174-lf-solder-pe3c3325lf-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C3325LF CAD Drawing

BNC Male to BNC Female Cable Using RG174 Coax, LF Solder

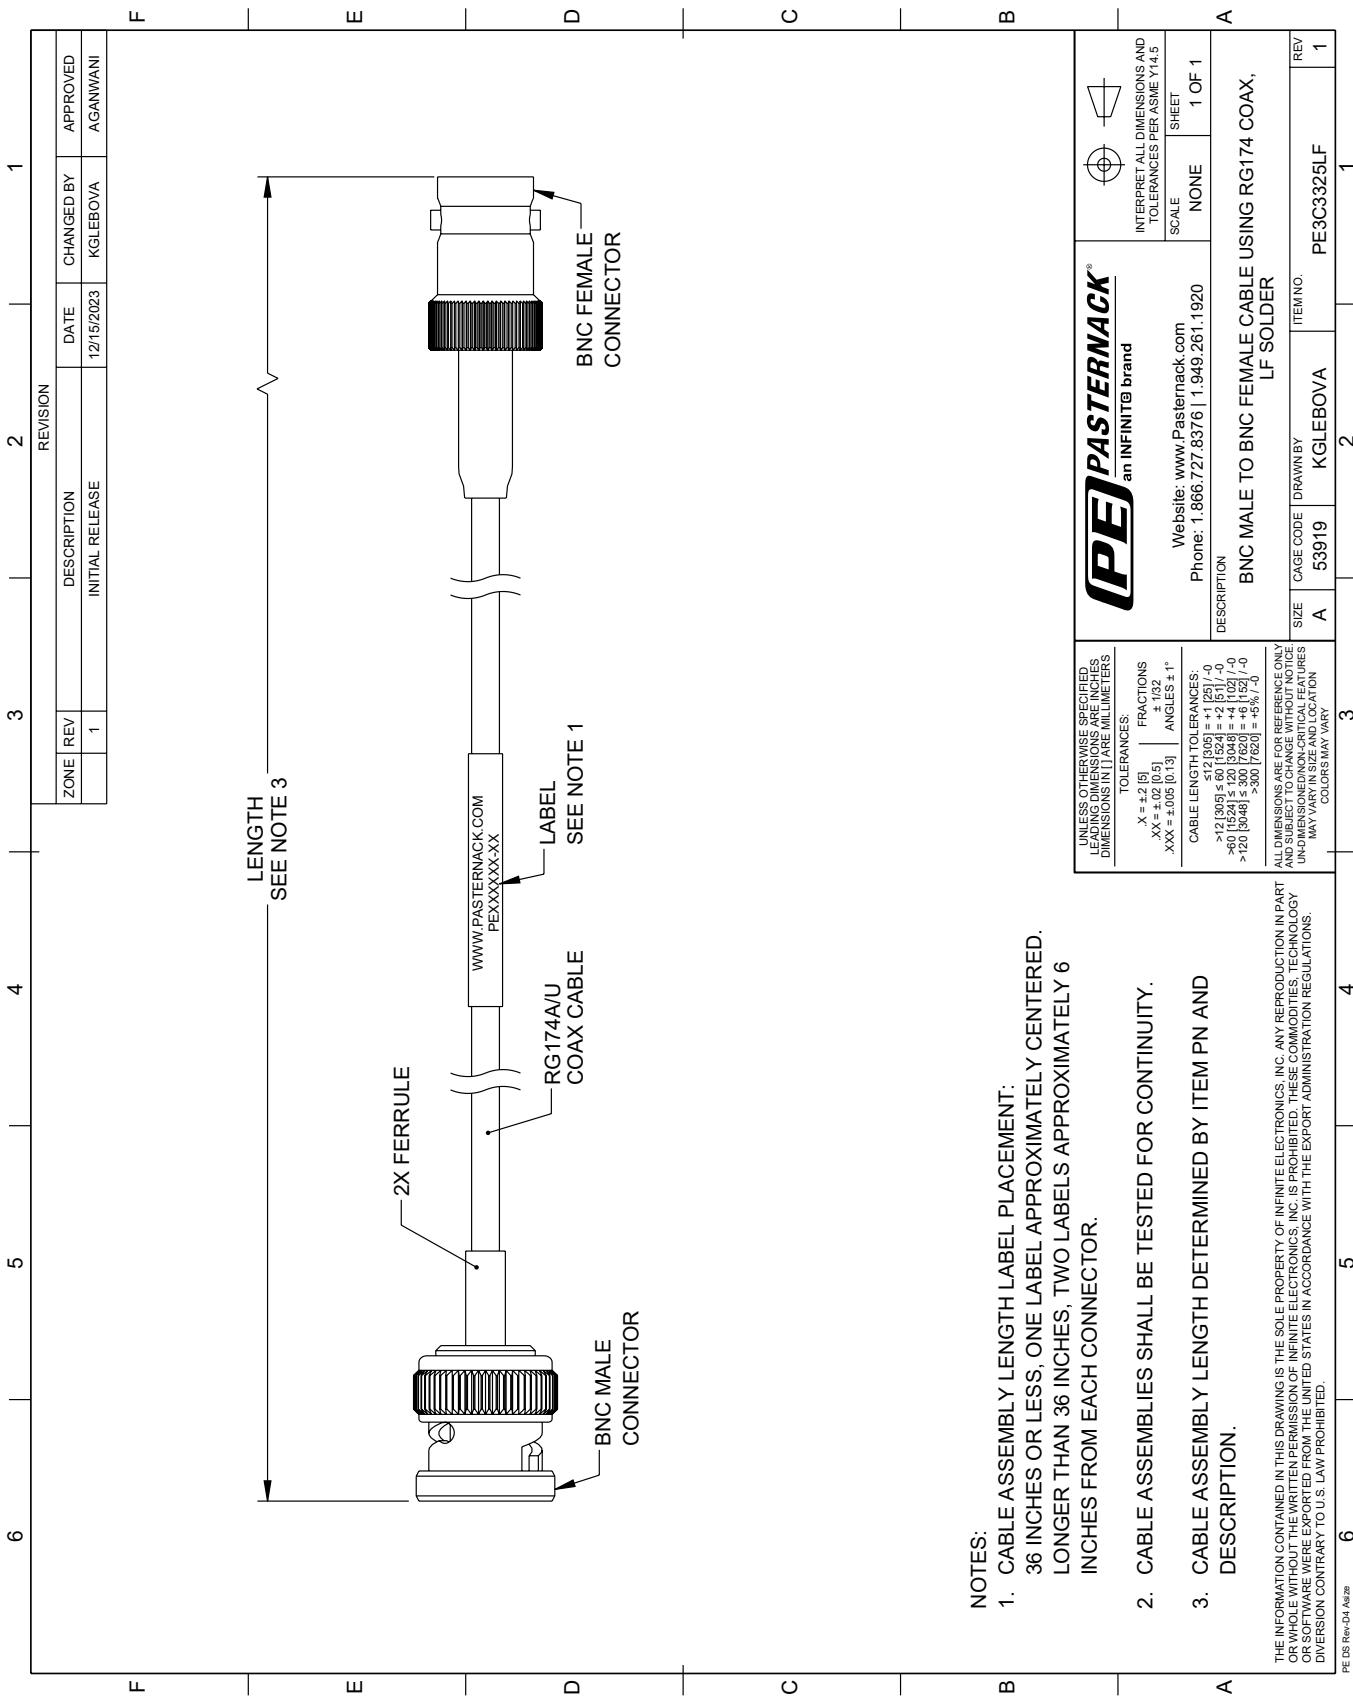

NOTES:
1. CABL 36 INCHES LONG

2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE, WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE, WHERE EXPORTED FROM THE UNITED STATES, IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS, DIVERSION CONTRARY TO U.S. LAW IS PROHIBITED.

LF SOLDER

THE INFORMATION
OR WHOLE WITH
OR SOFTWARE
DIVERSTION CO

© 2023 Infinite Electronics, Inc. Pasternack is a registered trademark of Infinite Electronics, Inc.

+1 (866) 558-2786 | sales@pasternack.com | pasternack.com