



## SMA Female Bulkhead to BNC Male Cable Using RG174 Coax

### RF Cable Assemblies Technical Data Sheet

PE3C3411

#### Configuration

- Connector 1: SMA Female Bulkhead
- Connector 2: BNC Male
- Cable Type: RG174

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.5:1	
Velocity of Propagation		66		%
Capacitance		31.1 [102.03]		pF/ft [pF/m]

dB/m  
dB/m

#### Mechanical Specifications

##### Cable Assembly

Diameter 0.57 in [14.48 mm]

##### Cable

Cable Type RG174  
 Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper Clad Steel, Silver  
 Dielectric Type PE (LD)  
 Number of Shields 1  
 Shield Layer 1 Tinned Copper Braid  
 Jacket Material PVC, Black  
 Jacket Diameter 0.11 in [2.79 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Bulkhead to BNC Male Cable Using RG174 Coax PE3C3411](#)



## SMA Female Bulkhead to BNC Male Cable Using RG174 Coax

### RF Cable Assemblies Technical Data Sheet

PE3C3411

#### Connectors

Description	Connector 1	Connector 2
Type	SMA Female Bulkhead	BNC Male
Specification	MIL-STD-348	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Gold	Brass, Gold
Contact Plating Specification	MIL-G-45204	50μ in. minimum
Dielectric Type		Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	QQ-N-290	100μ in. minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100μ in. minimum

#### Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8$ ", whichever is greater.

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

##### Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Bulkhead to BNC Male Cable Using RG174 Coax PE3C3411](#)



## SMA Female Bulkhead to BNC Male Cable Using RG174 Coax

### RF Cable Assemblies Technical Data Sheet

PE3C3411

#### How to Order

Part Number Configuration:

**PE3C3411**

- **xx**

**uu**

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3C3411-12 = 12 inches long cable  
PE3C3411-100cm = 100 cm long cable

SMA Female Bulkhead to BNC Male Cable Using RG174 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Bulkhead to BNC Male Cable Using RG174 Coax PE3C3411](https://www.pasternack.com/sma-female-bnc-male-rg174-coax-cable-assembly-pe3c3411-p.aspx)

URL: <https://www.pasternack.com/sma-female-bnc-male-rg174au-cable-assembly-pe3c3411-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C3411 CAD Drawing

SMA Female Bulkhead to BNC Male Cable Using RG174 Coax

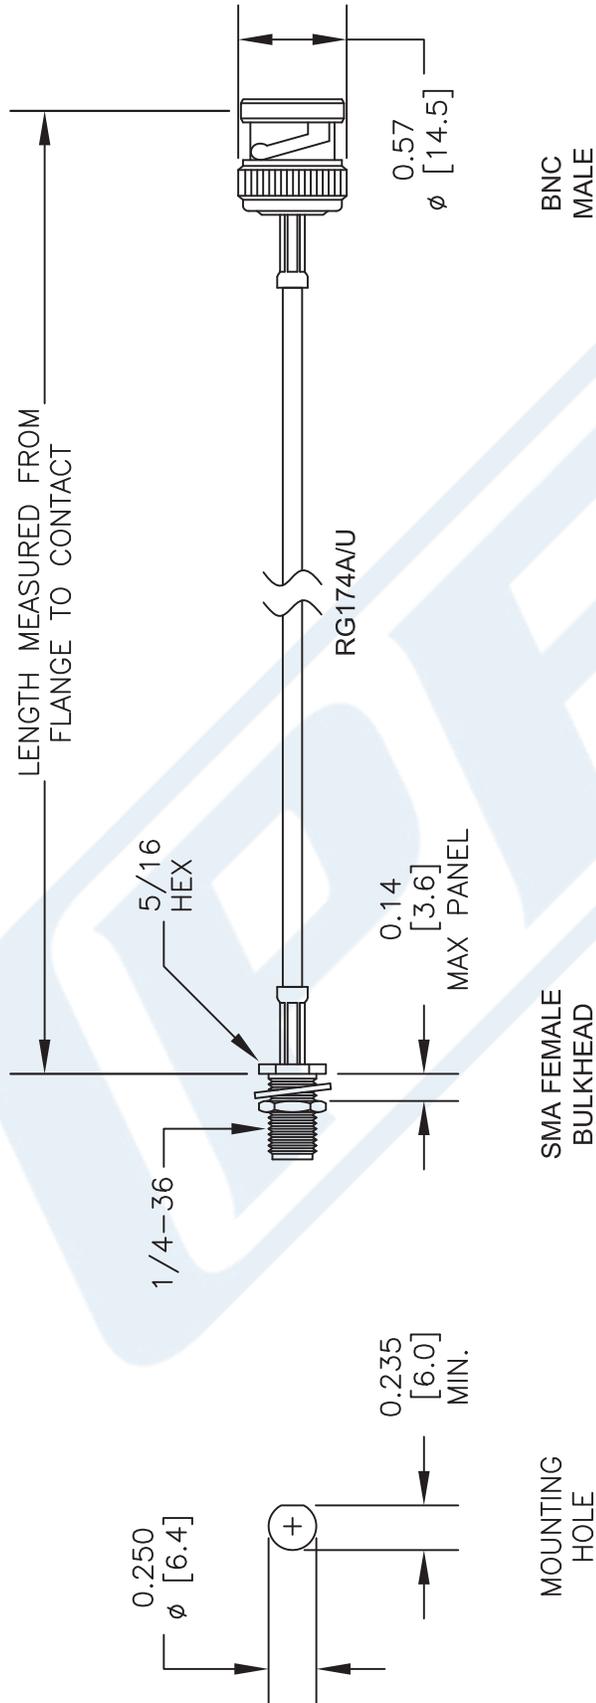

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE3C3411**

CAGE CODE 53919

CAD FILE 111416

SCALE N/A

SIZE A

2233

**PE PASTERNAK**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com