



SMA Male to N Female Low Loss Cable Using LMR-195 Coax

TECHNICAL DATA SHEET


PE3C3768

Configuration

- Connector 1: SMA Male
- Connector 2: N Female
- Cable Type: LMR-195
- Coax Flex Type: Flexible

Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 80% Phase Velocity
- Double Shielded
- PE Jacket

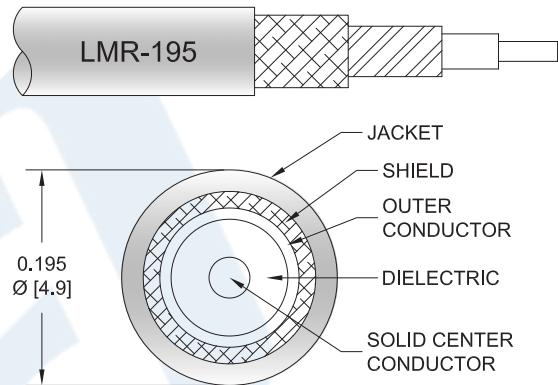

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C3768 SMA male to type N female cable using LMR-195 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to type N cable assembly has a male to female gender configuration with 50 ohm flexible LMR-195 coax. The PE3C3768 SMA male to type N female cable assembly operates to 6 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female Low Loss Cable Using LMR-195 Coax PE3C3768](#)



SMA Male to N Female Low Loss Cable Using LMR-195 Coax

TECHNICAL DATA SHEET

PE3C3768

Electrical Specifications

Description	Minimum	Typical		Maximum	Units
Frequency Range	DC			6	GHz
VSWR			1.4:1		
Velocity of Propagation	80				%
RF Shielding	90			dB	
Group Delay	1.27 [4.17]				ns/ft [ns/m]
Capacitance	25.4 [83.33]				pF/ft [pF/m]
Inductance	0.064 [0.21]				uH/ft [uH/m]
DC Resistance Inner Conductor	7.6 [24.93]				Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor	4.9 [16.08]				Ω/1000ft [Ω/Km]
Jacket Spark	3,000				Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
PE3C3768	Custom Lengths Available	Insertion Loss (Typ.)	0.06	0.08	0.12	0.19	0.3	dB/ft	
			0.19	0.27	0.39	0.63	0.99	dB/m	
PE3C3768-12	12 inch	Insertion Loss (Typ.)	0.26	0.29	0.32	0.39	0.5	dB	0.112
PE3C3768-24	24 inch	Insertion Loss (Typ.)	0.32	0.37	0.44	0.58	0.8	dB	0.135
PE3C3768-36	36 inch	Insertion Loss (Typ.)	0.38	0.45	0.56	0.77	1.1	dB	0.157
PE3C3768-48	48 inch	Insertion Loss (Typ.)	0.43	0.53	0.67	0.96	1.4	dB	0.179
PE3C3768-60	60 inch	Insertion Loss (Typ.)	0.49	0.61	0.79	1.15	1.7	dB	0.201

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB
Loss due to Connector 2: 0.1 dB
Base Weight: 0.112 pounds
Additional Weight per Inch: 0.00184 pounds

Mechanical Specifications

Cable Assembly

Weight 0.112 lbs [50.8 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female Low Loss Cable Using LMR-195 Coax PE3C3768](#)



SMA Male to N Female Low Loss Cable Using LMR-195 Coax

TECHNICAL DATA SHEET

PE3C3768

Cable

Cable Type	LMR-195
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.195 in [4.95 mm]

One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]
Bending Moment	0.2 lbs-ft [0.27 N-m]
Flat Plate Crush	15 lbs/in [0.27 Kg/mm]
Tensile Strength	40 lbs [18.14 Kg]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Threaded	N Female Threaded
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Phosphor Bronze, Gold
Contact Plating Specification	ASTM B488	
Dielectric Type	Teflon	PTFE
Body Material and Plating	Passivated Stainless Steel	Brass, Tri-Metal
Coupling Nut Material and Plating	Passivated Stainless Steel	
Hex Size	5/16 Inch	

Compliance Certifications

(see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female Low Loss Cable Using LMR-195 Coax PE3C3768](#)




SMA Male to N Female Low Loss Cable Using LMR-195 Coax

TECHNICAL DATA SHEET

PE3C3768

How to Order

Part Number Configuration:

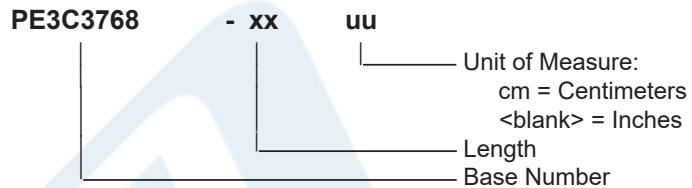

Example: PE3C3768-12 = 12 inches long cable
PE3C3768-100cm = 100 cm long cable

SMA Male to N Female Low Loss Cable Using LMR-195 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female Low Loss Cable Using LMR-195 Coax PE3C3768](#)


URL: <https://www.pasternack.com/sma-male-to-n-female-low-loss-cable-using-lmr-195-pe3c3768-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C3768 CAD Drawing

SMA Male to N Female Low Loss Cable Using LMR-195 Coax

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	01/13/2023	KGLEBOVA	AGANWANI

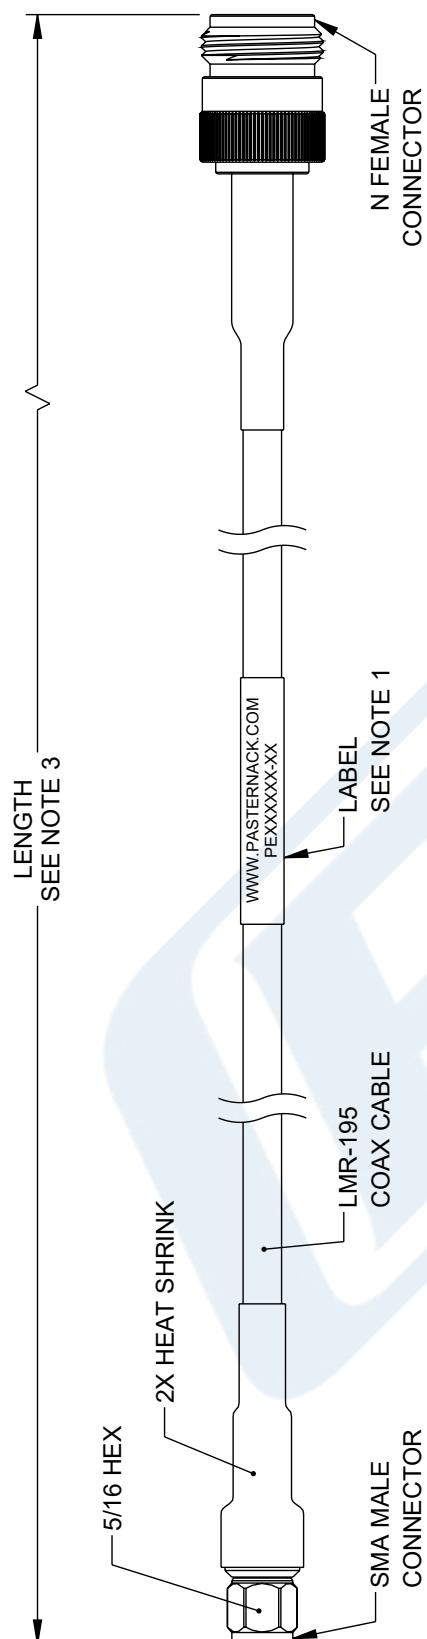

NOTES.

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6
INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND
DESCRIPTION.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMUNITIES, TECHNOLOGY OR SOFTWARE WE'RE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

LOW LOSS CABLE USING LMR-195

1