

## SMA Male Right Angle to SMA Female Low Loss Cable Using LMR-240 Coax with HeatShrink




### PE3C5195/HS

#### Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Female
- Cable Type: LMR-240
- Coax Flex Type: Flexible

#### Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

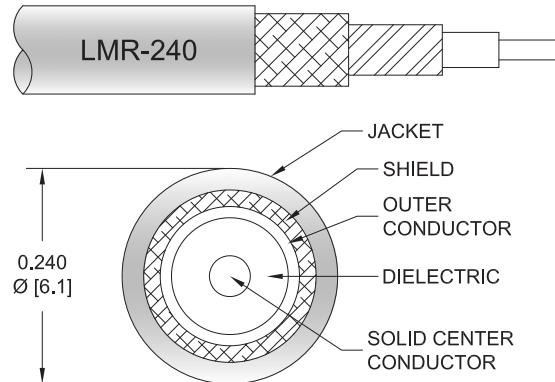

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C5195/HS SMA male right angle to SMA female cable using LMR-240 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMA cable assembly has a male to female gender configuration with 50 ohm flexible LMR-240 coax. The PE3C5195/HS SMA male to SMA female cable assembly operates to 6 GHz. The right angle SMA interface on the LMR-240 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		3.2 [10.5]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ohms/1000ft [Ohms/Km]

## SMA Male Right Angle to SMA Female Low Loss Cable Using LMR-240 Coax with HeatShrink



### PE3C5195/HS

#### Electrical Specifications

Description	Minimum	Typical					Maximum	Units
Jacket Spark						5,000		Vrms

#### Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
PE3C5195/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.039	0.055	0.079	0.129	0.204	dB/ft	
			0.13	0.19	0.26	0.43	0.67	dB/m	
PE3C5195/HS-12	12 Inch	Insertion Loss (Typ.)	0.39	0.41	0.43	0.48	0.56	dB	0.063
PE3C5195/HS-24	24 Inch	Insertion Loss (Typ.)	0.43	0.46	0.51	0.61	0.76	dB	0.096
PE3C5195/HS-36	36 Inch	Insertion Loss (Typ.)	0.47	0.52	0.59	0.74	0.97	dB	0.129
PE3C5195/HS-48	48 Inch	Insertion Loss (Typ.)	0.51	0.57	0.67	0.87	1.17	dB	0.162
PE3C5195/HS-60	60 Inch	Insertion Loss (Typ.)	0.55	0.63	0.75	1	1.37	dB	0.195

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.25 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.063 pounds
Additional Weight per Inch:	0.09417 pounds

#### Mechanical Specifications

##### Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.063 lbs [28.58 g]

##### Cable

Cable Type	LMR-240
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.24 in [6.1 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]
Bending Moment	0.25 lbs-ft [0.34 N-m]
Flat Plate Crush	20 lbs/in [0.36 Kg/mm]
Tensile Strength	80 lbs [36.29 Kg]

## SMA Male Right Angle to SMA Female Low Loss Cable Using LMR-240 Coax with HeatShrink



### PE3C5195/HS

#### Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Female
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Dielectric Type	Teflon	PTFE
Body Material and Plating	Stainless Steel	Brass, Gold
Coupling Nut Material and Plating	Stainless Steel	

#### Environmental Specifications

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

## SMA Male Right Angle to SMA Female Low Loss Cable Using LMR-240 Coax with HeatShrink




### PE3C5195/HS

#### Typical Performance Data

#### How to Order

Part Number Configuration:

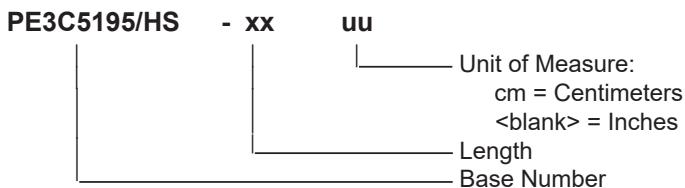

Example: PE3C5195/HS-12 = 12 inches long cable  
PE3C5195/HS-100cm = 100 cm long cable

SMA Male Right Angle to SMA Female Low Loss Cable Using LMR-240 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Low Loss Cable Using LMR-240 Coax with HeatShrink PE3C5195/HS](#)

URL: <https://www.pasternack.com/sma-male-right-angle-to-sma-female-low-loss-cable-using-lmr-240-with-heatshrink-pe3c5195-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C5195/HS CAD Drawing

SMA Male Right Angle to SMA Female Low Loss Cable Using LMR-240 Coax with HeatShrink

