

BNC Male to BNC Male Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components , LF Solder



RF Cable Assemblies Technical Data Sheet


PE3C6717LF

Configuration

- Connector 1: BNC Male
- Connector 2: BNC Male
- Cable Type: LMR-400-UF

Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- TPE Jacket
- 500 Mating Cycles

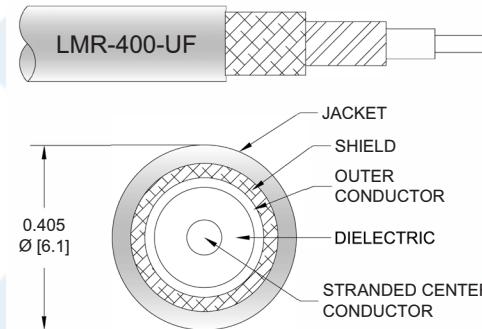

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C6717LF BNC male to BNC male cable using LMR-400-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to BNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-400-UF coax. The PE3C6717LF BNC male to BNC male cable assembly operates to 5.8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components , LF Solder PE3C6717LF](#)



BNC Male to BNC Male Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C6717LF

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		85		%
RF Shielding	90			dB
Group Delay		1.2 [3.94]		ns/ft [ns/m]
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		1.07 [3.51]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		1.65 [5.41]		Ω/1000ft [Ω/Km]
Jacket Spark			8,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.023	0.034	0.049	0.081	0.13	dB/ft
	0.08	0.11	0.16	0.27	0.43	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.252 lbs [114.31 g]

Cable

Cable Type LMR-400-UF
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper
Dielectric Type PE (F)
Number of Shields 2
Shield Layer 1 Aluminum Tape
Shield Layer 2 Tinned Copper Braid
Jacket Material TPE, Black
Jacket Diameter 0.405 in [10.29 mm]

One Time Minimum Bend Radius 1 in [25.4 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components , LF Solder PE3C6717LF](#)



BNC Male to BNC Male Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C6717LF

Repeated Minimum Bend Radius	4 in [101.6 mm]
Bending Moment	0.38 lbs-ft [0.52 N-m]
Flat Plate Crush	20 lbs/in [0.36 Kg/mm]
Tensile Strength	160 lbs [72.57 Kg]

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	BNC Male
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 microns	50 microns
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	80 microns	80 microns
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	80 microns	80 microns

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
Shock	MIL-STD-202G, Method 213, Condition G
Vibration	MIL-STD-202G, Method 204, Condition B
Thermal Shock	MIL-STD-202G, Method 107, Condition B

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components , LF Solder PE3C6717LF](#)

BNC Male to BNC Male Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components , LF Solder




RF Cable Assemblies Technical Data Sheet

PE3C6717LF

How to Order

Part Number Configuration:

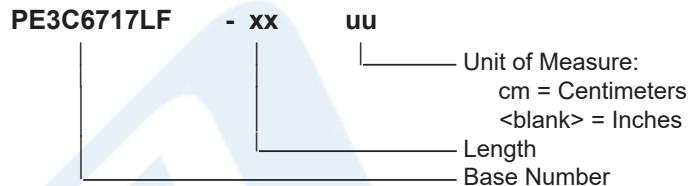

Example: PE3C6717LF-12 = 12 inches long cable
PE3C6717LF-100cm = 100 cm long cable

BNC Male to BNC Male Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components , LF Solder PE3C6717LF](#)


URL: <https://www.pasternack.com/bnc-male-to-bnc-male-low-loss-cable-using-lmr-400-uf-lf-solder-pe3c6717lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C6717LF CAD Drawing

BNC Male to BNC Male Low Loss Cable Using LMR-400-UF Coax With Times Microwave Components , LF Solder

ZONE	REV.	DESCRIPTION	DATE	CHANGED BY	APPROVED BY
	A	INITIAL RELEASE	01/13/2023	KGLEBOVA	AGANWANI

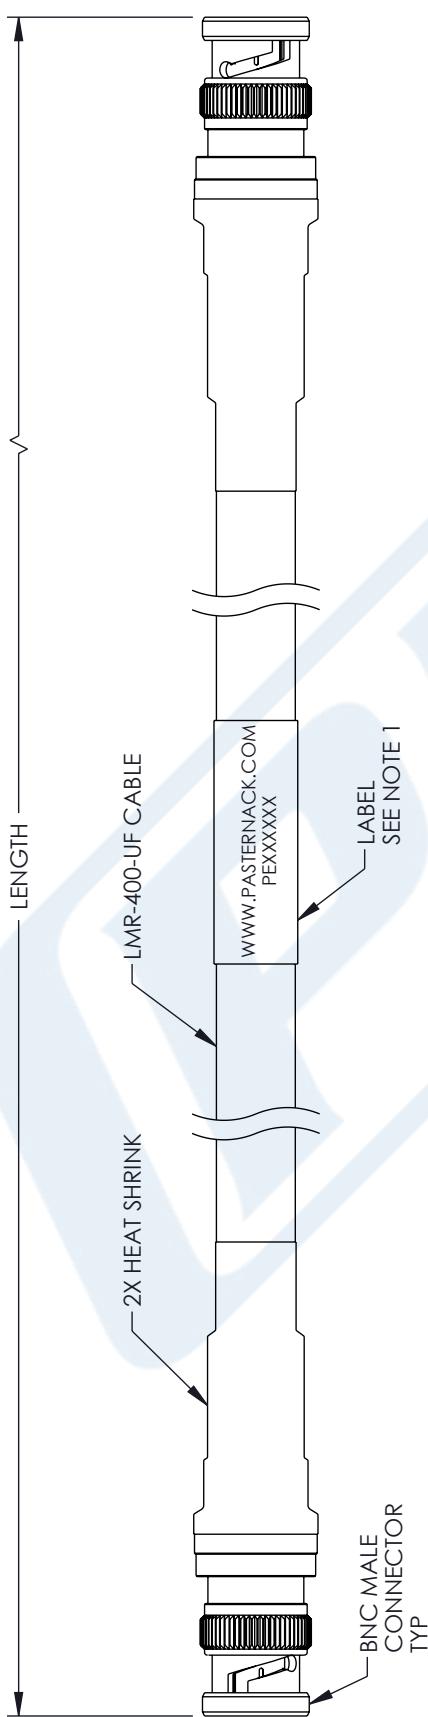

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6
INCHES FROM EACH CONNECTOR.
CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE

 PASTERNACK® an INFINITI® brand			
TOLERANCES: $\pm .005$ [1.3]		FRACTIONS: $\pm .02$ [5] $\pm .02$ [5] $\pm .005$ [1.3]	
INCHES MILLIMETERS		± .032 ANGLES ± 1° INCHES LENGTH TOLERANCES:	
INCHES OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES INSINUSIS IN [] ARE MILLIMETERS		DESCRIPTION BNC MALE TO BNC MALE LOWLOSS CABLE USING LMR-400-LF COAX, LF SOLDER WITH TIMES MICROWAVE COMPONENTS	
SIZE A	CAGE CODE 53919	DRAWN BY KGLEBOVA	ITEM NO. PE3C6717LF
INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5		SCALE NONE	REV A
SHEET 1 OF 1			
DIMENSIONS ARE FOR REFERENCE ONLY SUBJECT TO CHANGE WITHOUT NOTICE.			