

## Snap-On QMA Male Right Angle to QMA Female Bulkhead Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax



### RF Cable Assemblies Technical Data Sheet


PE3C7876-60

#### Configuration

- Connector 1: Snap-OnQMA Male Right Angle
- Connector 2: QMA Female Bulkhead
- Cable Type: 1/4" Superflexible

#### Features

- Max Frequency 6 GHz
- Low PIM: -150 dBc Max
- Shielding Effectivity > 120 dB
- 82% Phase Velocity
- PE Jacket
- Low PIM and Low Loss
- 100% Tested with PIM Test Results Marked on Cable

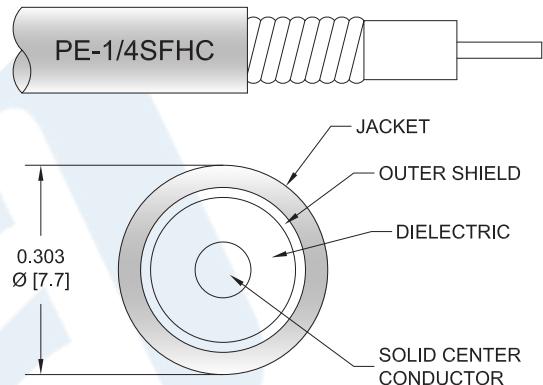

#### Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Distributed Antenna Systems (DAS)
- Low PIM Applications and PIM Testing

#### Description

Pasternack's PE3C7876-60 QMA male snap-on right angle to QMA female bulkhead 60 inch cable using 1/4 inch superflexible coax is part of our full line of RF components available for same-day shipping. Pasternack's corrugated RF cable assemblies are ideal for applications where durability and high power are needed. This Pasternack QMA to QMA cable assembly has a male to female gender configuration with 50 ohm corrugated 1/4" superflexible coax. The PE3C7876-60 QMA male to QMA female cable assembly operates to 6 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -150 dBc. The right angle QMA interface on the 1/4" superflexible cable allows for easier connections in tight spaces. Our RF cable assembly with QMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Snap-On QMA Male Right Angle to QMA Female Bulkhead Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax PE3C7876-60](#)



## Snap-On QMA Male Right Angle to QMA Female Bulkhead Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax

### RF Cable Assemblies Technical Data Sheet

**PE3C7876-60**

#### Electrical Specifications

| Description                   | Minimum | Typical      | Maximum | Units           |
|-------------------------------|---------|--------------|---------|-----------------|
| Frequency Range               | DC      |              | 6       | GHz             |
| VSWR                          |         |              | 1.5:1   |                 |
| Velocity of Propagation       |         | 82           |         | %               |
| RF Shielding                  | 120     |              |         | dB              |
| Passive Intermodulation       |         |              | -150    | dBc             |
| Capacitance                   |         | 24.4 [80.05] |         | pF/ft [pF/m]    |
| Inductance                    |         | 0.059 [0.19] |         | uH/ft [uH/m]    |
| DC Resistance Inner Conductor |         | 3.2 [10.5]   |         | Ω/1000ft [Ω/Km] |
| DC Resistance Outer Conductor |         | 2.53 [8.3]   |         | Ω/1000ft [Ω/Km] |
| Jacket Spark                  |         |              | 2,000   | Vrms            |

#### Specifications by Frequency

| Description           | F1   | F2   | F3   | F4   | F5   | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency             | 0.1  | 0.25 | 0.5  | 1    | 3    | GHz   |
| Insertion Loss (Typ.) | 0.33 | 0.38 | 0.44 | 0.53 | 0.78 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated 0.15 dB for the right angle connector and 0.1 dB for the straight connector.

#### Mechanical Specifications

##### Cable Assembly

|          |                  |
|----------|------------------|
| Length*  | 60 in [152.4 cm] |
| Diameter | 0.5 in [12.7 mm] |

##### Cable

|                                      |                                  |
|--------------------------------------|----------------------------------|
| Cable Type                           | 1/4" Superflexible               |
| Impedance                            | 50 Ohms                          |
| Inner Conductor Type                 | Solid                            |
| Inner Conductor Material and Plating | Copper Clad Aluminum             |
| Dielectric Type                      | PE (F)                           |
| Number of Shields                    | 1                                |
| Shield Layer 1                       | Helically Corrugated Copper Tube |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Snap-On QMA Male Right Angle to QMA Female Bulkhead Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax PE3C7876-60](#)



## Snap-On QMA Male Right Angle to QMA Female Bulkhead Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax

### RF Cable Assemblies Technical Data Sheet

PE3C7876-60

|                              |                   |
|------------------------------|-------------------|
| Jacket Material              | PE, Black         |
| Jacket Diameter              | 0.303 in [7.7 mm] |
| One Time Minimum Bend Radius | 0.5 in [12.7 mm]  |
| Repeated Minimum Bend Radius | 1 in [25.4 mm]    |
| Typical Flex Cycles          | 20                |
| Tensile Strength             | 79 lbs [35.83 Kg] |

#### Connectors

| Description                          | Connector 1          | Connector 2              |
|--------------------------------------|----------------------|--------------------------|
| Type                                 | QMA Male Right Angle | QMA Female Bulkhead      |
| Specification                        | QMA                  | QMA                      |
| Impedance                            | 50 Ohms              | 50 Ohms                  |
| Connection Method                    | Snap-On              |                          |
| Contact Material and Plating         | Brass, Silver        |                          |
| Dielectric Type                      | PTFE                 | PTFE                     |
| Outer Conductor Material and Plating |                      | Beryllium Copper, Silver |
| Body Material and Plating            | Brass, Tri-Metal     | Brass, Tri-Metal         |

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +85 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Snap-On QMA Male Right Angle to QMA Female Bulkhead Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax PE3C7876-60](#)



## Snap-On QMA Male Right Angle to QMA Female Bulkhead Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax

### RF Cable Assemblies Technical Data Sheet

PE3C7876-60

#### How to Order

Part Number Configuration:

**PE3C7876**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C7876-12 = 12 inches long cable  
PE3C7876-100cm = 100 cm long cable

Snap-On QMA Male Right Angle to QMA Female Bulkhead Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Snap-On QMA Male Right Angle to QMA Female Bulkhead Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax PE3C7876-60](#)

URL: <https://www.pasternack.com/qma-male-qma-female-pe-1-4-sfhc-cable-assembly-pe3c7876-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C7876-60 CAD Drawing

Snap-On QMA Male Right Angle to QMA Female Bulkhead Low PIM  
Cable 60 Inch Length Using 1/4 inch Superflexible Coax

