



SMA Male Connector Solder Attachment for RG402

RF Connectors Technical Data Sheet

M39012/79-3008

Configuration

- SMA Male Connector
- 50 Ohms
- Straight Body Geometry
- Connector Interface Types: RG402
- 5/16 inch Hex

Features

- Max. Operating Frequency 18 GHz
- Excellent VSWR of 1.21:1
- Gold Plated Beryllium Copper Contact
- QPL Part

Applications

- General Purpose Test
- Custom Cable Assemblies

Description

Pasternack's M39012/79-3008 SMA male connector is part of our full line of RF components available for same-day shipping. Our SMA male connector operates up to a maximum frequency of 18 GHz and offers excellent VSWR of 1.21:1.

Our SMA male connector M39012/79-3008 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.21:1	
Impedance		50		Ohms
Dielectric Withstanding Voltage (AC)			1,000	Vrms

Mechanical Specifications

Size	
Length	0.44 in [11.18 mm]
Width	0.31 in [7.92 mm]
Height	0.31 in [7.92 mm]
Weight	0.01 lbs [6.35 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Connector Solder Attachment for RG402 M39012/79-3008](#)



SMA Male Connector Solder Attachment for RG402

RF Connectors Technical Data Sheet

M39012/79-3008

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold
Insulation	PTFE	
Outer Conductor	Stainless Steel	Gold
Body	Stainless Steel	Gold
Coupling Nut	Stainless Steel	

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Connector Solder Attachment for RG402 M39012/79-3008](#)




SMA Male Connector Solder Attachment for RG402

RF Connectors Technical Data Sheet


M39012/79-3008

Assembly Instruction

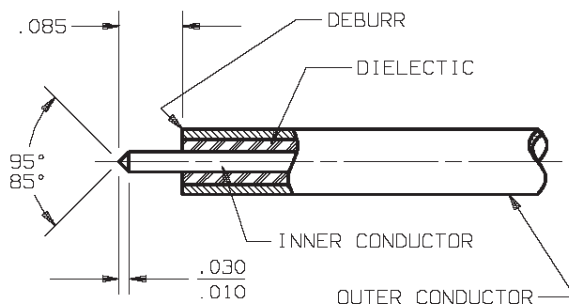

1) Prepare cable end

- Trim cable outer conductor/dielectric and inner conductor to dimensions shown. Do not nick the inner conductor.

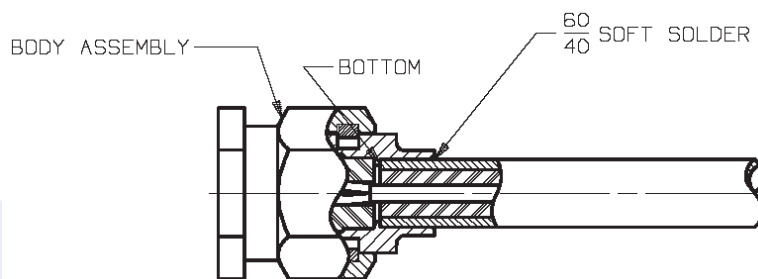

2) Solder cable to body

- Insert cable into body.
- As the inner conductor makes contact, bottom cable against the shoulder inside the body.
- Using 60/40 solder, solder cable to body all around while applying sufficient pressure to keep cable bottomed in body during process.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Connector Solder Attachment for RG402 M39012/79-3008](#)



SMA Male Connector Solder Attachment for RG402

RF Connectors Technical Data Sheet

M39012/79-3008

SMA Male Connector Solder Attachment for RG402 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Connector Solder Attachment for RG402 M39012/79-3008](https://www.pasternack.com/sma-male-rg402-connector-m39012-79-3008-p.aspx)

URL: <https://www.pasternack.com/sma-male-rg402-connector-m39012-79-3008-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

M39012/79-3008 CAD Drawing

SMA Male Connector Solder Attachment for RG402

