



BNC Male to BNC Male Right Angle Low Loss Cable Using TCOM-240 Coax with Times Microwave Components

RF Cable Assemblies Technical Data Sheet

PE3C9814

Configuration

- Connector 1: BNC Male
- Connector 2: BNC Male Right Angle
- Cable Type: TCOM-240
- Coax Flex Type: Flexible

Features

- Max Frequency 4 GHz
- Double Shielded
- PE Jacket
- 500 Mating Cycles

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C9814 BNC male to BNC male right angle cable using TCOM-240 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to BNC cable assembly has a male to male gender configuration with 50 ohm flexible TCOM-240 coax. The PE3C9814 BNC male to BNC male cable assembly operates to 4 GHz. The right angle BNC interface on the TCOM-240 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Right Angle Low Loss Cable Using TCOM-240 Coax with Times Microwave Components PE3C9814](#)



BNC Male to BNC Male Right Angle Low Loss Cable Using TCOM-240 Coax with Times Microwave Components

RF Cable Assemblies Technical Data Sheet

PE3C9814

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	4		GHz
Insertion Loss (Typ.)	0.036	0.052	0.075	0.155		dB/ft
	0.12	0.17	0.25	0.51		dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as $0.1 \cdot \sqrt{FGHz}$ dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly

Weight 0.23 lbs [104.33 g]

Cable

Cable Type TCOM-240
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper
 Dielectric Type PE (F)
 Number of Shields 2
 Shield Layer 1 Silver Plated Copper Braid
 Shield Layer 2 Tinned Copper Braid
 Jacket Material PE, Black
 Jacket Diameter 0.24 in [6.1 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Right Angle Low Loss Cable Using TCOM-240 Coax with Times Microwave Components PE3C9814](#)



BNC Male to BNC Male Right Angle Low Loss Cable Using TCOM-240 Coax with Times Microwave Components

RF Cable Assemblies Technical Data Sheet

PE3C9814

Connectors

Description	Connector 1	Connector 2
Type	BNC Male Bayonet	BNC Male Right Angle Bayonet
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold over nickel
Contact Plating Specification	50 µin minimum	50 µin minimum
Dielectric Type	PTFE	Teflon
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	80 µin minimum	80 µin minimum
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	80 µin minimum	80 µin minimum

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Right Angle Low Loss Cable Using TCOM-240 Coax with Times Microwave Components PE3C9814](#)



BNC Male to BNC Male Right Angle Low Loss Cable Using TCOM-240 Coax with Times Microwave Components

RF Cable Assemblies Technical Data Sheet

PE3C9814

How to Order

Part Number Configuration:

PE3C9814

- **xx**

uu

Unit of Measure:
 cm = Centimeters
 <blank> = Inches
 Length
 Base Number

Example: PE3C9814-12 = 12 inches long cable
 PE3C9814-100cm = 100 cm long cable

BNC Male to BNC Male Right Angle Low Loss Cable Using TCOM-240 Coax with Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Right Angle Low Loss Cable Using TCOM-240 Coax with Times Microwave Components PE3C9814](#)

URL: <https://www.pasternack.com/bnc-male-to-bnc-male-low-loss-cable-using-tcom-240-pe3c9814-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C9814 CAD Drawing

BNC Male to BNC Male Right Angle Low Loss Cable Using TCOM-240 Coax with Times Microwave Components

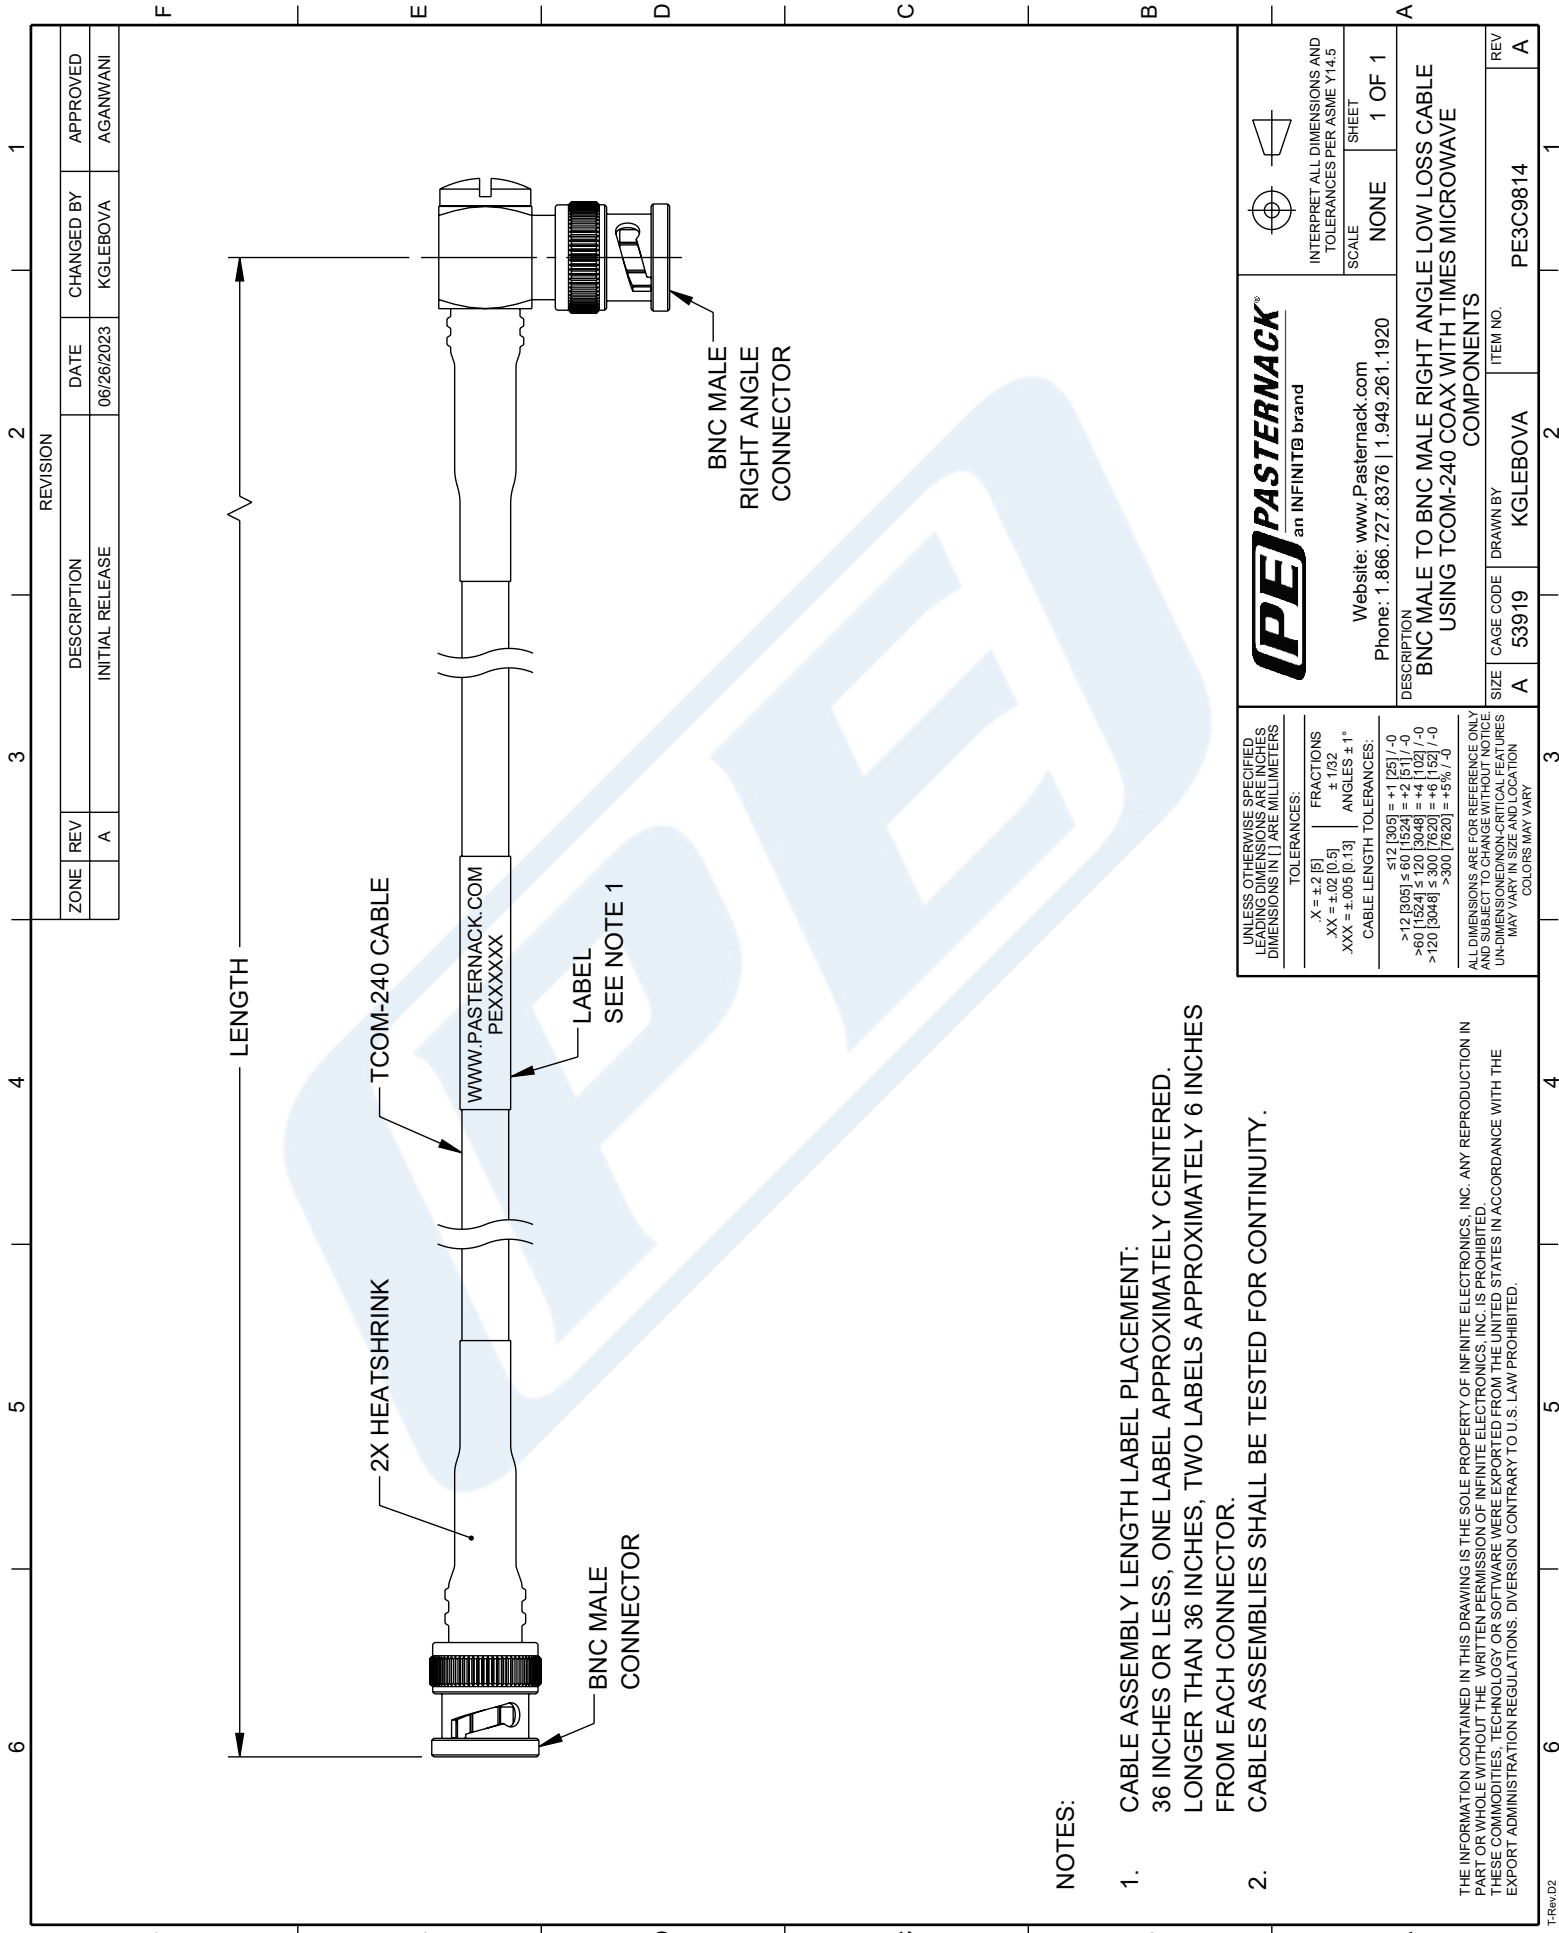

BNC MALE RIGHT ANGLE CONNECTOR

LABEL SEE NOTE 1

TCOM-240 CABLE

2X HEATSHRINK

BNC MALE CONNECTOR

LENGTH

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	06/26/2023	KGLEBOVA	AGANWANI

<p>PASTERNAK an INFINITI® brand</p> <p>Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920</p>	<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> <p>SCALE: NONE</p> <p>SHEET: 1 OF 1</p>																
	<p>DESCRIPTION: BNC MALE TO BNC MALE RIGHT ANGLE LOW LOSS CABLE USING TCOM-240 COAX WITH TIMES MICROWAVE COMPONENTS</p>																
<p>UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE INCHES, DIMENSIONS IN [] ARE MILLIMETERS.</p> <p>TOLERANCES:</p> <table border="0"> <tr> <td>.X = ±.2 [5]</td> <td>FRACTIONS ±.1/32</td> </tr> <tr> <td>.XX = ±.02 [0.5]</td> <td>ANGLES ± 1°</td> </tr> <tr> <td>.XXX = ±.005 [0.13]</td> <td>CABLE LENGTH TOLERANCES:</td> </tr> <tr> <td></td> <td><12 [305] = +1 [25] / -0</td> </tr> <tr> <td></td> <td>>12 [305] ≤ 60 [1524] = +2 [51] / -0</td> </tr> <tr> <td></td> <td>>60 [1524] ≤ 120 [3048] = +4 [102] / -0</td> </tr> <tr> <td></td> <td>>120 [3048] ≤ 300 [7620] = +6 [152] / -0</td> </tr> <tr> <td></td> <td>>300 [7620] = +5% / -0</td> </tr> </table>	.X = ±.2 [5]	FRACTIONS ±.1/32	.XX = ±.02 [0.5]	ANGLES ± 1°	.XXX = ±.005 [0.13]	CABLE LENGTH TOLERANCES:		<12 [305] = +1 [25] / -0		>12 [305] ≤ 60 [1524] = +2 [51] / -0		>60 [1524] ≤ 120 [3048] = +4 [102] / -0		>120 [3048] ≤ 300 [7620] = +6 [152] / -0		>300 [7620] = +5% / -0	<p>SIZE: A</p> <p>CAGE CODE: 53919</p> <p>DRAWN BY: KGLEBOVA</p> <p>ITEM NO.: PE3C9814</p>
.X = ±.2 [5]	FRACTIONS ±.1/32																
.XX = ±.02 [0.5]	ANGLES ± 1°																
.XXX = ±.005 [0.13]	CABLE LENGTH TOLERANCES:																
	<12 [305] = +1 [25] / -0																
	>12 [305] ≤ 60 [1524] = +2 [51] / -0																
	>60 [1524] ≤ 120 [3048] = +4 [102] / -0																
	>120 [3048] ≤ 300 [7620] = +6 [152] / -0																
	>300 [7620] = +5% / -0																

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.