

SMA Male Right Angle to SMA Female Cable 200 cm Length Using PE-SR405FLJ Coax




RF Cable Assemblies Technical Data Sheet

PE3W02994-200CM


Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Female
- Cable Type: PE-SR405FLJ



Features

- Max Frequency 10 GHz
- Shield Effectivity > 100 dB
- 69.5% Phase Velocity
- FEP Jacket

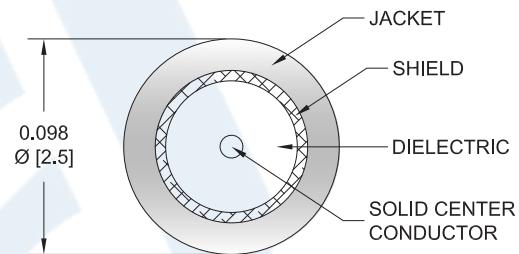

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W02994-200CM SMA male right angle to SMA female 200 cm cable using PE-SR405FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SMA cable assembly has a male to female gender configuration with 50 ohm formable PE-SR405FLJ coax. The PE3W02994-200CM SMA male to SMA female cable assembly operates to 10 GHz. The right angle SMA interface on the PE-SR405FLJ cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		10	GHz
VSWR			1.5:1	
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Cable 200 cm Length Using PE-SR405FLJ Coax PE3W02994-200CM](#)

SMA Male Right Angle to SMA Female Cable 200 cm Length Using PE-SR405FLJ Coax



RF Cable Assemblies Technical Data Sheet

PE3W02994-200CM

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	10	GHz
Insertion Loss (Max.)	1.29	1.78	2.57	3.91	5.63	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.3dB of connector loss.

Mechanical Specifications

Cable Assembly

Length*
Diameter

78.74 in [200 cm]
0.315 in [8 mm]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Outer Conductor Material and Plating
Jacket Material
Jacket Diameter

PE-SR405FLJ
50 Ohms
Solid
Copper Clad Steel, Silver
PTFE
1
Tinned Copper Braid
FEP, Black
0.098 in [2.49 mm]

One Time Minimum Bend Radius
Repeated Minimum Bend Radius

0.236 in [5.99 mm]
0.787 in [19.99 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Cable 200 cm Length Using PE-SR405FLJ Coax PE3W02994-200CM](#)

SMA Male Right Angle to SMA Female Cable 200 cm Length Using PE-SR405FLJ Coax



RF Cable Assemblies Technical Data Sheet

PE3W02994-200CM

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Female
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold over Nickel	Beryllium Copper, Gold over Nickel
Contact Plating Specification	0.2 μ in minimum	
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold over Nickel	Brass, Gold over Nickel
Body Plating Specification	0.1 μ in minimum	
Coupling Nut Material and Plating	Passivated Stainless Steel	
Hex Size	5/16 inch	
Torque	8 in-lbs [0.9 Nm]	

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8$ ", whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Cable 200 cm Length Using PE-SR405FLJ Coax PE3W02994-200CM](#)

SMA Male Right Angle to SMA Female Cable
200 cm Length Using PE-SR405FLJ Coax



RF Cable Assemblies Technical Data Sheet

PE3W02994-200CM

How to Order

Part Number Configuration:

PE3W02994

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W02994-12 = 12 inches long cable
PE3W02994-100cm = 100 cm long cable

SMA Male Right Angle to SMA Female Cable 200 cm Length Using PE-SR405FLJ Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Cable 200 cm Length Using PE-SR405FLJ Coax](#)
[PE3W02994-200CM](#)

URL: <https://www.pasternack.com/sma-male-sma-female-pe-sr405flj-cable-assembly-pe3w02994-200cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W02994-200CM CAD Drawing

SMA Male Right Angle to SMA Female Cable 200 cm Length Using PE-SR405FLJ Coax

