

SMA Male to N Female Bulkhead Cable Using LMR-400-UF Coax




PE3W05629

Configuration

- Connector 1: SMA Male
- Connector 2: N Female Bulkhead
- Cable Type: LMR-400-UF
- Coax Flex Type: Flexible

Features

- Max Frequency 8 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- TPE Jacket

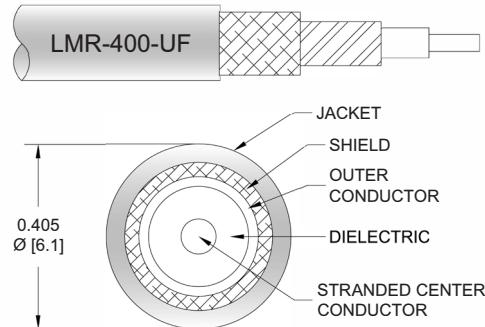

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W05629 SMA male to type N female bulkhead cable using LMR-400-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to type N cable assembly has a male to female gender configuration with 50 ohm flexible LMR-400-UF coax. The PE3W05629 SMA male to type N female cable assembly operates to 8 GHz. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|--------------|---------|-----------------------|
| Frequency Range | DC | | 8 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 85 | | % |
| RF Shielding | 90 | | | dB |
| Group Delay | | 1.2 [3.94] | | ns/ft [ns/m] |
| Capacitance | | 23.9 [78.41] | | pF/ft [pF/m] |
| Inductance | | 0.06 [0.2] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 1.07 [3.51] | | Ohms/1000ft [Ohms/Km] |
| DC Resistance Outer Conductor | | 1.65 [5.41] | | Ohms/1000ft [Ohms/Km] |

SMA Male to N Female Bulkhead Cable Using LMR-400-UF Coax



PE3W05629

Electrical Specifications

| Description | Minimum | Typical | | | | | Maximum | Units |
|--------------|---------|---------|--|--|--|-------|---------|-------|
| Jacket Spark | | | | | | 8,000 | | Vrms |

Specifications by Frequency

| Part Number | Length | Description | F1 | F2 | F3 | F4 | F5 | Units | Weight (lbs) |
|---------------|--------------------------|-----------------------|-------|------|-------|-------|------|-------|--------------|
| | | Frequency | 500 | 1000 | 2000 | 4000 | 8000 | MHz | |
| PE3W05629 | Custom Lengths Available | Insertion Loss (Typ.) | 0.035 | 0.05 | 0.072 | 0.094 | 0.13 | dB/ft | |
| | | | 0.12 | 0.17 | 0.24 | 0.31 | 0.43 | dB/m | |
| PE3W05629-12 | 12 inch | Insertion Loss (Typ.) | 0.24 | 0.25 | 0.28 | 0.3 | 0.33 | dB | 0.247 |
| PE3W05629-24 | 24 inch | Insertion Loss (Typ.) | 0.27 | 0.3 | 0.35 | 0.39 | 0.46 | dB | 0.334 |
| PE3W05629-36 | 36 inch | Insertion Loss (Typ.) | 0.31 | 0.35 | 0.42 | 0.49 | 0.59 | dB | 0.421 |
| PE3W05629-60 | 60 inch | Insertion Loss (Typ.) | 0.38 | 0.45 | 0.56 | 0.67 | 0.85 | dB | 0.595 |
| PE3W05629-300 | 300 inch | Insertion Loss (Typ.) | 1.08 | 1.45 | 2 | 2.55 | 3.45 | dB | 2.335 |

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB
Loss due to Connector 2: 0.1 dB
Base Weight: 0.247 pounds
Additional Weight per Inch: 0.00725 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter 0.5 in [12.7 mm]
Weight 0.247 lbs [112.04 g]

Cable

Cable Type LMR-400-UF
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper
Dielectric Type PE (F)
Number of Shields 2
Shield Layer 1 Aluminum Tape
Shield Layer 2 Tinned Copper Braid
Jacket Material TPE, Black
Jacket Diameter 0.405 in [10.29 mm]
One Time Minimum Bend Radius 1 in [25.4 mm]
Repeated Minimum Bend Radius 4 in [101.6 mm]
Bending Moment 0.38 lbs-ft [0.52 N-m]
Flat Plate Crush 20 lbs/in [0.36 Kg/mm]
Tensile Strength 160 lbs [72.57 Kg]

SMA Male to N Female Bulkhead Cable Using LMR-400-UF Coax



PE3W05629

Connectors

| Description | Connector 1 | Connector 2 |
|-----------------------------------|------------------|---------------------|
| Type | SMA Male | N Female Bulkhead |
| Specification | | MIL-STD-348A |
| Impedance | 50 Ohms | 50 Ohms |
| Configuration | Straight | Straight |
| Mating Cycles | | 500 |
| Contact Material and Plating | Brass, Gold | Brass, Gold |
| Contact Plating Specification | | 30 μ in minimum |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Gold | Brass, Tri-Metal |
| Coupling Nut Material and Plating | Brass, Gold | |
| Hex Size | 5/16 inch | |
| Torque | 3 in-lbs 0.34 Nm | |

Environmental Specifications

Operating Range Temperature -40 to +85 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

SMA Male to N Female Bulkhead Cable Using LMR-400-UF Coax



PE3W05629

Typical Performance Data

How to Order

Part Number Configuration:

PE3W05629 - xx uu

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length

Base Number

Example: PE3W05629-12 = 12 inches long cable
PE3W05629-100cm = 100 cm long cable

SMA Male to N Female Bulkhead Cable Using LMR-400-UF Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female Bulkhead Cable Using LMR-400-UF Coax PE3W05629](#)

URL: <https://www.pasternack.com/sma-male-to-n-female-bulkhead-cable-using-lmr-400-uf-pe3w05629-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W05629 CAD Drawing

SMA Male to N Female Bulkhead Cable Using LMR-400-UF Coax

