

SSMA Male to BNC Female Bulkhead Low Loss Cable Using LMR-100 Coax



RF Cable Assemblies Technical Data Sheet


PE3W08050

Configuration

- Connector 1: SSMA Male
- Connector 2: BNC Female Bulkhead
- Cable Type: LMR-100A

Features

- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

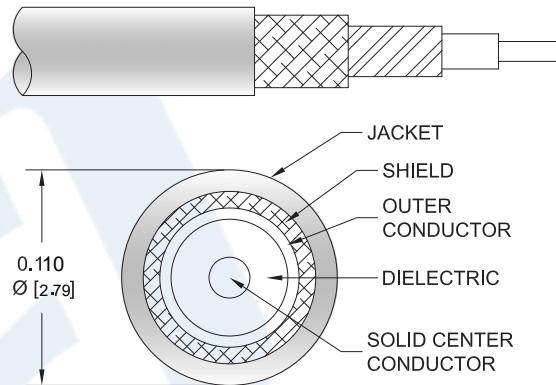

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W08050 SSMA male to BNC female bulkhead cable using LMR-100 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SSMA to BNC cable assembly has a male to female gender configuration with 50 ohm flexible LMR-100A coax. Our RF cable assembly with BNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMA Male to BNC Female Bulkhead Low Loss Cable Using LMR-100 Coax PE3W08050](#)



SSMA Male to BNC Female Bulkhead Low Loss Cable Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3W08050

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		9.5 [31.17]		Ω/1000ft [Ω/Km]
Jacket Spark			2,000	Vrms

Mechanical Specifications

Cable Assembly

Weight	0.061 lbs [27.67 g]
Cable	
Cable Type	LMR-100A
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.11 in [2.79 mm]
One Time Minimum Bend Radius	0.25 in [6.35 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	15 lbs [6.8 Kg]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMA Male to BNC Female Bulkhead Low Loss Cable Using LMR-100 Coax PE3W08050](#)



SSMA Male to BNC Female Bulkhead Low Loss Cable Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3W08050

Connectors

Description	Connector 1	Connector 2
Type	SSMA Male	BNC Female Bulkhead
Impedance	50 Ohms	50 Ohms
Contact Material and Plating		Brass, Gold
Contact Plating Specification		30 μ in minimum
Dielectric Type		PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification		100 μ in minimum

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMA Male to BNC Female Bulkhead Low Loss Cable Using LMR-100 Coax PE3W08050](#)



SSMA Male to BNC Female Bulkhead Low Loss Cable Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3W08050

How to Order

Part Number Configuration:

PE3W08050

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W08050-12 = 12 inches long cable
PE3W08050-100cm = 100 cm long cable

SSMA Male to BNC Female Bulkhead Low Loss Cable Using LMR-100 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMA Male to BNC Female Bulkhead Low Loss Cable Using LMR-100 Coax PE3W08050](#)


URL: <https://www.pasternack.com/ssma-male-to-bnc-female-bulkhead-low-loss-cable-using-lmr-100-pe3w08050-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W08050 CAD Drawing

SSMA Male to BNC Female Bulkhead Low Loss Cable Using LMR-100 Coax

ZONE	REV.	DESCRIPTION	DATE	CHANGED BY	APPROVED BY
	A	INITIAL RELEASE	01/25/2023	BPUCHASKI	AGANWANI

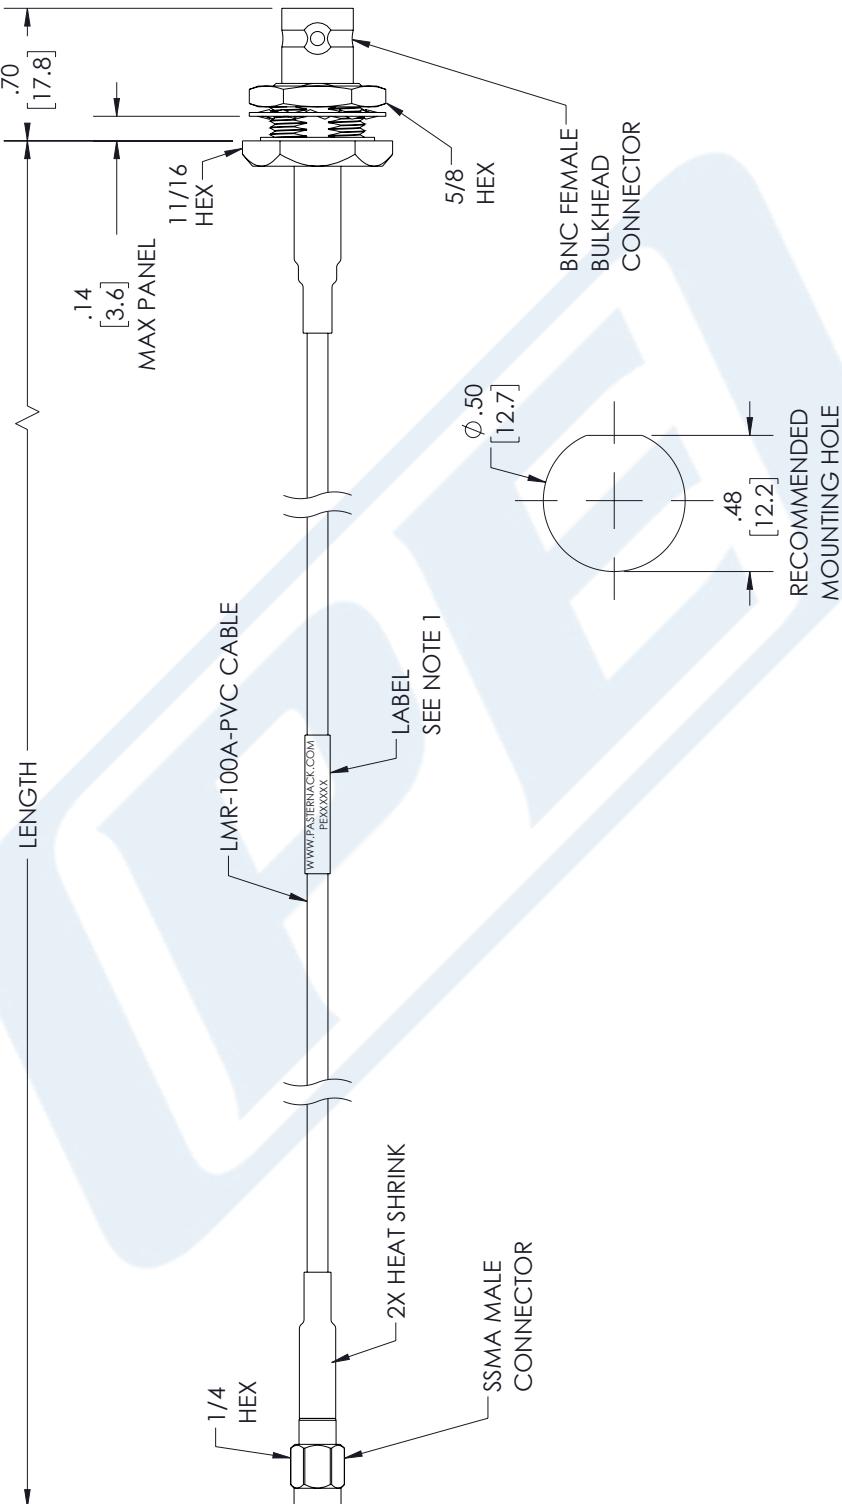

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS , ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.

2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINITY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.

				<p>PASTERNACK® an INFINITI® brand</p>	
				<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE SHEET</p>	
				<p>1 OF 1</p>	
					REV A
<p>OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p>		<p>FRACTIONS $\pm 1/32$ ± 0.05 [± 1.3]</p> <p>ANGLES $\pm 1^\circ$</p> <p>LENGTH TOLERANCES:</p>		<p>WEBSITE: www.Pasternack.com PHONE: 1.866.727.8376 1.949.261.1920</p>	
				<p>DESCRIPTION</p> <p>SSMA Male to BNC Female Bulkhead Low Loss Cable Using LMR-100 Coax</p>	
SIZE	CAGE CODE	DRAWN BY	ITEM NO.	PE3W08050	REV A
A	53919	BPUCHASKI			