



## Slide-On BMA Jack 2 Hole Flange to SMA Male Cable 100 cm Using RG402 Coax

### RF Cable Assemblies Technical Data Sheet

PE3W08629-100CM

#### Configuration

- Connector 1: Slide-OnBMA Jack 2 Hole Flange
- Connector 2: SMA Male
- Cable Type: RG402

#### Features

- Max Frequency 18 GHz
- 69.5% Phase Velocity

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W08629-100CM BMA jack slide-on 2 hole flange to SMA male 100 cm cable using RG402 coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack BMA to SMA cable assembly has a jack to male gender configuration with 50 ohm semi-rigid RG402 coax. The PE3W08629-100CM BMA jack to SMA male cable assembly operates to 18 GHz. Our RF cable assembly with BMA 2 hole flange interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	0.5	0.65	1.02	1.52	2.32	dB

Electrical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Slide-On BMA Jack 2 Hole Flange to SMA Male Cable 100 cm Using RG402 Coax PE3W08629-100CM](#)



## Slide-On BMA Jack 2 Hole Flange to SMA Male Cable 100 cm Using RG402 Coax

### RF Cable Assemblies Technical Data Sheet

PE3W08629-100CM

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss is estimated as  $0.03 * \text{SQRT}(F\text{GHz})$  dB per BMA jack connector and 0.1 dB per SMA male connector.

#### Mechanical Specifications

##### Cable Assembly

Length\*

39.37 in [100 cm]

Diameter

0.74 in [18.8 mm]

##### Cable

Cable Type

RG402

Impedance

50 Ohms

Inner Conductor Type

Solid

Inner Conductor Material and Plating

Copper Clad Steel, Silver

Dielectric Type

PTFE

Number of Shields

1

Outer Conductor Material and Plating

Copper

Repeated Minimum Bend Radius

0.25 in [6.35 mm]

#### Connectors

Description	Connector 1	Connector 2
Type	BMA Jack 2 Hole Flange	SMA Male
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Connection Method	Slide-On	
Mating Cycles	1,000	
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold
Contact Plating Specification	51.18 $\mu$ in. minimum	50 $\mu$ in minimum
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Beryllium Copper, Gold	Stainless Steel, Gold
Outer Conductor Plating Specification		10 $\mu$ in minimum
Body Material and Plating	Stainless Steel, Gold	Stainless Steel, Gold
Body Plating Specification	19.68 $\mu$ in. minimum	10 $\mu$ in minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 $\mu$ in minimum
Hex Size		5/16 inch
Torque		3 in-lbs [0.34 Nm]
Seal Gasket Material		Silicone

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Slide-On BMA Jack 2 Hole Flange to SMA Male Cable 100 cm Using RG402 Coax PE3W08629-100CM](#)



## Slide-On BMA Jack 2 Hole Flange to SMA Male Cable 100 cm Using RG402 Coax

### RF Cable Assemblies Technical Data Sheet

PE3W08629-100CM

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +100 deg C


#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

#### How to Order

Part Number Configuration:

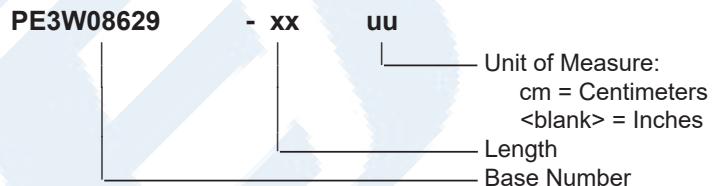

Example: PE3W08629-12 = 12 inches long cable  
PE3W08629-100cm = 100 cm long cable

Slide-On BMA Jack 2 Hole Flange to SMA Male Cable 100 cm Using RG402 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Slide-On BMA Jack 2 Hole Flange to SMA Male Cable 100 cm Using RG402 Coax PE3W08629-100CM](#)



URL: <https://www.pasternack.com/bma-jack-sma-male-rg402u-cable-assembly-pe3w08629-100cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3W08629-100CM CAD Drawing

Slide-On BMA Jack 2 Hole Flange to SMA Male Cable 100 cm Using RG402 Coax

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/29/2020	S.ELLIS

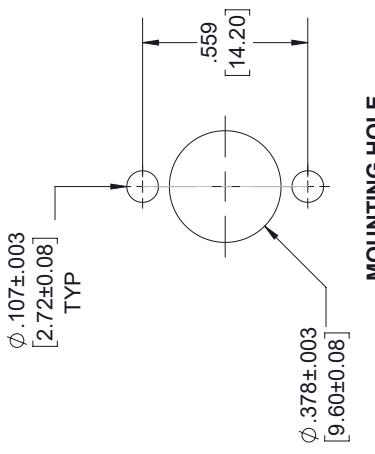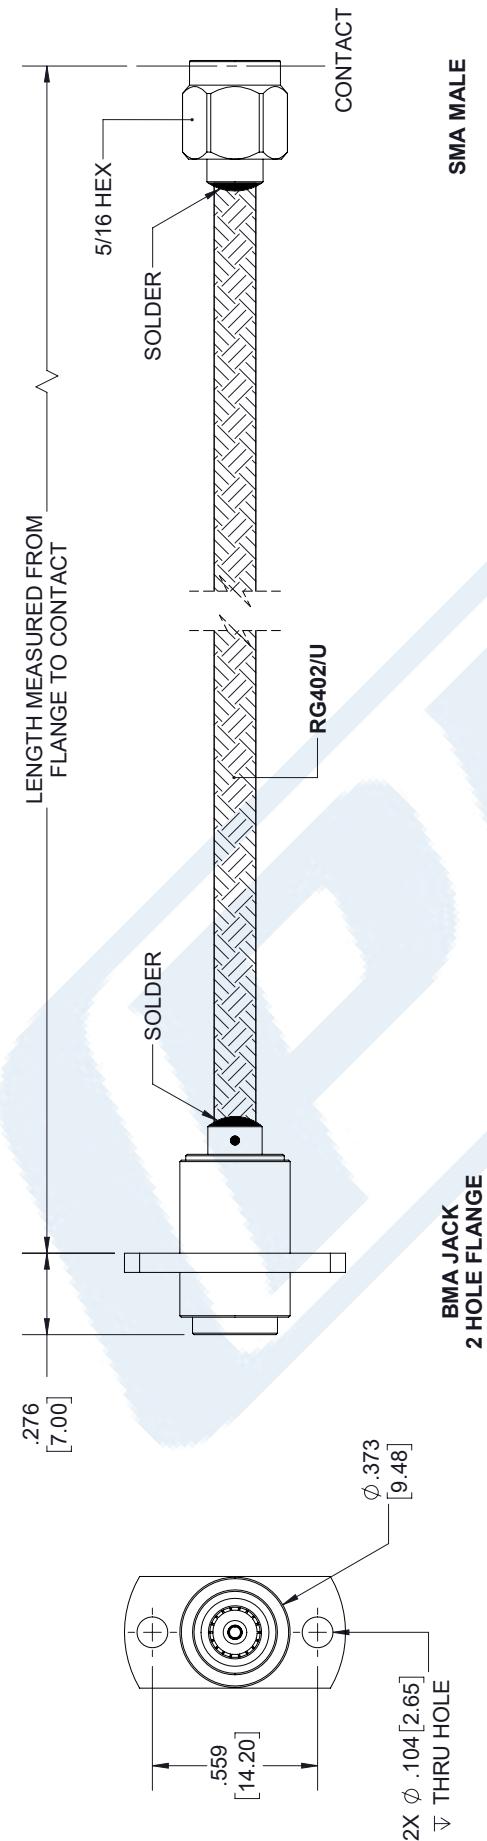

THIRD ANGLE PROJECTION	
THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.	
<b>PASTERNAK</b> an INFINITE brand	
Pasternak Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920   1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternak.com E-mail: sales@pasternak.com	
SCALE	1 OF 1
ITEM NO.	PE3W08629
REV	A

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS  
TOLERANCES:

X = ± 2 [5.08]	FRACTIONS ± 1/32
XXX = ± .005 [±.13]	ANGLES ± 1°
CABLE LENGTH (L) TOLERANCES:	
L ≤ 12 [305] = +1 [25] / -0	
12 [305] < L ≤ 60 [1524] = +2 [51] / -0	
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0	
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0	
300 [7620] < L = +5% L / -0	

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE  
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.