

## SMA Male to SMA Male Low Loss Cable Using LMR-LW400 Coax



### RF Cable Assemblies Technical Data Sheet

**PE3W12498**

#### Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male
- Cable Type: LMR-LW400

#### Features

- Max Frequency 8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W12498 SMA male to SMA male cable using LMR-LW400 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible LMR-LW400 coax. The PE3W12498 SMA male to SMA male cable assembly operates to 8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Low Loss Cable Using LMR-LW400 Coax PE3W12498](#)



## SMA Male to SMA Male Low Loss Cable Using LMR-LW400 Coax

**RF Cable Assemblies Technical Data Sheet**
**PE3W12498**
**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.2 [3.94]		ns/ft [ns/m]
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		1.39 [4.56]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		6.1 [20.01]		Ω/1000ft [Ω/Km]
Jacket Spark			8,000	Vrms

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2	4	8	GHz
Insertion Loss (Typ.)	0.028	0.041	0.06	0.086	0.13	dB/ft
	0.09	0.13	0.2	0.28	0.43	dB/m

**Electrical Specification Notes:**

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

**Mechanical Specifications**
**Cable Assembly**

Weight 0.19 lbs [86.18 g]

**Cable**

Cable Type	LMR-LW400
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	Foam PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Aluminum
Jacket Material	PE, Black
Jacket Diameter	0.405 in [10.29 mm]
One Time Minimum Bend Radius	1 in [25.4 mm]
Repeated Minimum Bend Radius	4 in [101.6 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Low Loss Cable Using LMR-LW400 Coax PE3W12498](#)



## SMA Male to SMA Male Low Loss Cable Using LMR-LW400 Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W12498**

Bending Moment  
Flat Plate Crush  
Tensile Strength

0.5 lbs-ft [0.68 N-m]  
40 lbs/in [0.71 Kg/mm]  
160 lbs [72.57 Kg]

#### Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Gold
Coupling Nut Material and Plating	Brass, Gold	Brass, Gold
Hex Size	16-May inch	16-May inch
Torque	3 in-lbs [0.34 Nm]	3 in-lbs [0.34 Nm]

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +85 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Low Loss Cable Using LMR-LW400 Coax PE3W12498](#)



## SMA Male to SMA Male Low Loss Cable Using LMR-LW400 Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W12498**

#### How to Order

Part Number Configuration:

**PE3W12498**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W12498-12 = 12 inches long cable  
PE3W12498-100cm = 100 cm long cable

SMA Male to SMA Male Low Loss Cable Using LMR-LW400 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Low Loss Cable Using LMR-LW400 Coax PE3W12498](#)


URL: <https://www.pasternack.com/sma-male-to-sma-male-low-loss-cable-using-lmr-lw400-pe3w12498-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W12498 CAD Drawing

## SMA Male to SMA Male Low Loss Cable Using LMR-LW400 Coax

A INITIAL RELEASE U 12/01/2023 U21111 AGANWANI

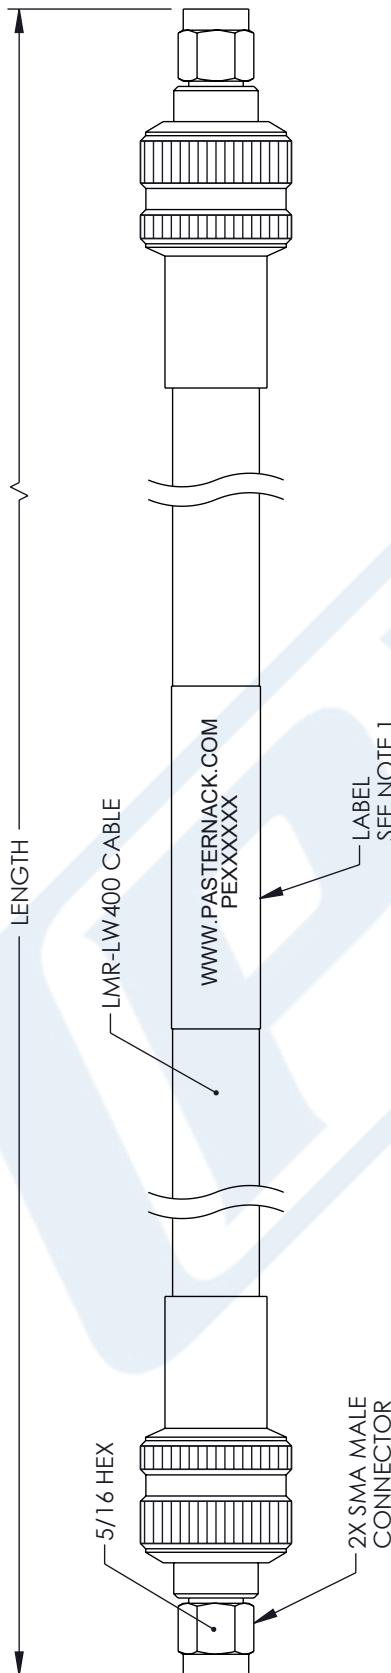

## NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:  
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.  
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES  
FROM EACH CONNECTOR.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.  
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE

 <b>PASTERНАК®</b> an INFINITI® brand			
LESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES: $\pm 0.005$ [0.13]		SCALE NONE	SHEET 1 OF 1
FRACTIONS: $\pm 1/32$ $\pm 1/16$ $\pm 1/8$		ANGLES: $\pm 1^\circ$ ADJUSTABLE LENGTH TOLERANCES: $\pm 0.05$ [1.3]	
DESCRIPTION <b>SMA MALE TO SMA MALE LOW LOSS CABLE USING LMR-W400 COAX</b>		Website: <a href="http://www.Pasterнак.com">www.Pasterнак.com</a> Phone: 1.866.727.8376   1.949.261.1920	
PE3W12498	ITEM NO.	DRAWN BY DZINN	SIZE A
REV A	CAGE CODE 53919		
TOLERANCES ARE FOR REFERENCE ONLY SUBJECT TO CHANGE WITHOUT NOTICE			