



SMA Male to SMA Male Right Angle Precision Cable 72 Inch Length Using 160 Series Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE301-72

Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male Right Angle
- Cable Type: 160 Series

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
RF Shielding	90			dB
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			1,900	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	1.8	2.34	3.3	4.92	7.02	dB

Electrical Specification Notes:

Short lengths up to 24" long may exhibit VSWR measurements up to 9% higher.

Mechanical Specifications

Cable Assembly

Length	72 in [182.88 cm]
Diameter	0.17 in [4.32 mm]
Weight	0.07 lbs [31.75 g]

Cable

Cable Type	160 Series
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	3

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Precision Cable 72 Inch Length Using 160 Series Coax, RoHS PE301-72](#)



SMA Male to SMA Male Right Angle Precision Cable 72 Inch Length Using 160 Series Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE301-72

Shield Layer 1	Silver Plated Copper Tape
Shield Layer 2	Mylar Tape
Shield Layer 3	Silver Plated Copper Braid
Jacket Material	FEP, Blue
Jacket Diameter	0.163 in [4.14 mm]
One Time Minimum Bend Radius	1 in [25.4 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male Right Angle
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Gold	Gold
Dielectric Type	PTFE	PTFE
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Hex Size	5/16 in.	5/16 in.
Torque	8 in-lbs [0.9 Nm]	8 in-lbs [0.9 Nm]
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel

Environmental Specifications

Temperature

Operating Range	-50 to +205 deg C
-----------------	-------------------

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
REACH Compliant	12/17/2014

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Precision Cable 72 Inch Length Using 160 Series Coax, RoHS PE301-72](#)



SMA Male to SMA Male Right Angle Precision Cable 72 Inch Length Using 160 Series Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE301-72

How to Order

Part Number Configuration:

PE301

- xx

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE301-12 = 12 inches long cable
PE301-100cm = 100 cm long cable

SMA Male to SMA Male Right Angle Precision Cable 72 Inch Length Using 160 Series Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Precision Cable 72 Inch Length Using 160 Series Coax, RoHS PE301-72](http://www.pasternack.com/sma-male-sma-male-160-series-cable-assembly-pe301-72-p.aspx)

URL: <http://www.pasternack.com/sma-male-sma-male-160-series-cable-assembly-pe301-72-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE301-72 CAD Drawing

SMA Male to SMA Male Right Angle Precision Cable
72 Inch Length Using 160 Series Coax, RoHS

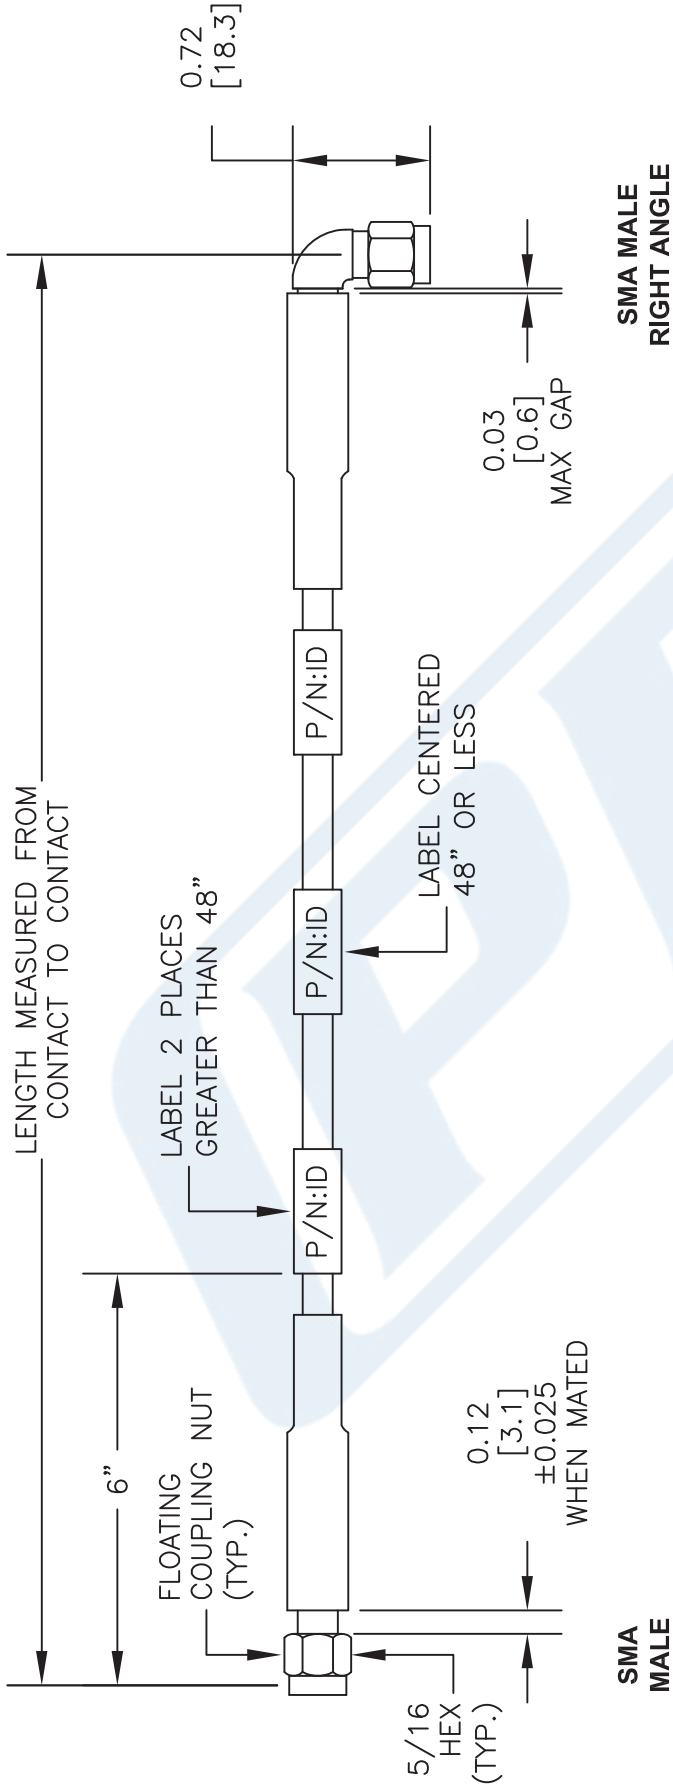

How To Order			
Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
-12	12"	-25CM	25Cm
-24	24"	-50CM	50Cm
-36	36"	-75CM	75Cm
-48	48"	-100CM	100Cm
-60	60"	-125CM	125Cm
-XX	Custom Length	-XXCM	Custom Length

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE
PE301

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919
CAD FILE 071012-B
SCALE N/A
SIZE A
2233