



WR-430 CMR-430 Flange to SMA Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band

Waveguide to Coax Adapters Technical Data Sheet

PE9835

Features

- L-S Band, 1.7 to 2.6 GHz Frequency Range
- WR-430 Waveguide Interface with CMR-430 Flange
- SMA Female Coaxial Interface
- Comprehensive waveguide offerings also include E-Bends, H-Bends, Sections, Filters, Terminations, Couplers, and more.

Description

The PE9835 is a waveguide to coaxial adapter operating in the L-S band with a 1.7 to 2.6 GHz frequency range. This adapter offers a WR-430 waveguide interface size coupled with a precision tolerance CMR-430 flange. The PE9835 is constructed of aluminum to ensure durability and repeatable RF performance. The SMA female connector mates with commercially available 2.92mm and 3.5mm connectors. The package is REACH and RoHS compliant.

Configuration

Waveguide Size	WR-430
Flange	CMR-430
RF Connector	SMA Female
Impedance	50 Ohms
Body Geometry	Right Angle

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	1.7		2.6	GHz
VSWR			1.3:1	
Input Power (Peak)			150	Watts

Mechanical Specifications

Size	
Length	3.5 in [88.9 mm]
Width	6.34 in [161.04 mm]
Height	4.19 in [106.43 mm]
Weight	1.464 lbs [664.06 g]

RF Connector	
Connector Type	SMA Female
Body Material and Plating	Stainless Steel

Waveguide Interface	
Waveguide Type	WR-430
Flange Type	CMR-430
Body Material and Plating	Aluminum

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-430 CMR-430 Flange to SMA Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band PE9835](#)



WR-430 CMR-430 Flange to SMA Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band

Waveguide to Coax Adapters Technical Data Sheet

PE9835

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

REACH Compliant


12/17/2015

Plotted and Other Data

Notes:

- Values at +25 °C, sea level unless stated otherwise

Typical Performance Data

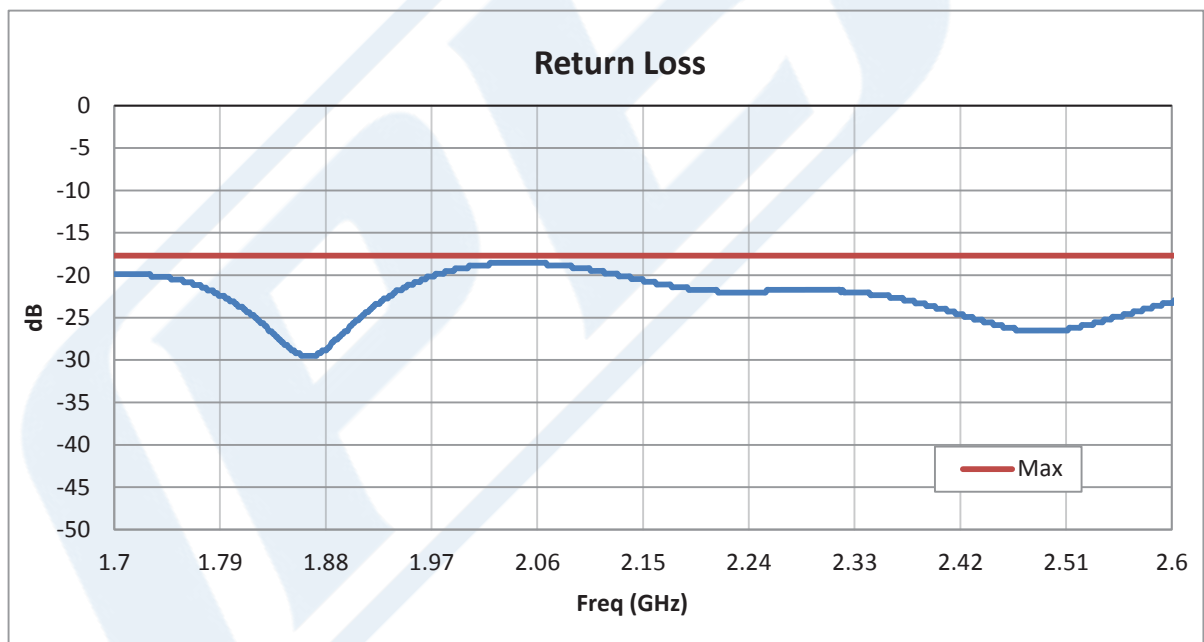

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-430 CMR-430 Flange to SMA Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band PE9835](#)



WR-430 CMR-430 Flange to SMA Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band

Waveguide to Coax Adapters Technical Data Sheet

PE9835

WR-430 CMR-430 Flange to SMA Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-430 CMR-430 Flange to SMA Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band PE9835](http://www.pasternack.com/wr-430-sma-female-waveguide-coax-adapter-1.7-ghz-2.6-ghz-pe9835-p.aspx)

URL: <http://www.pasternack.com/wr-430-sma-female-waveguide-coax-adapter-1.7-ghz-2.6-ghz-pe9835-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9835 CAD Drawing

WR-430 CMR-430 Flange to SMA Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band

WR430 Dimension	Inches	mm
A	6.340	161.04
B	5.591	142.01
C	2.795	70.99
D	3.574	90.78
E	1.787	45.39
F	4.190	106.43
G	3.440	87.38
H	1.720	43.69
I	1.876	47.65
J	0.938	23.83
K	4.300	109.22
L	2.150	54.61

M	0.372	9.45
N	3.500	88.90
O	2.684	68.17
P	3.624	92.05
Q	1.652	41.96

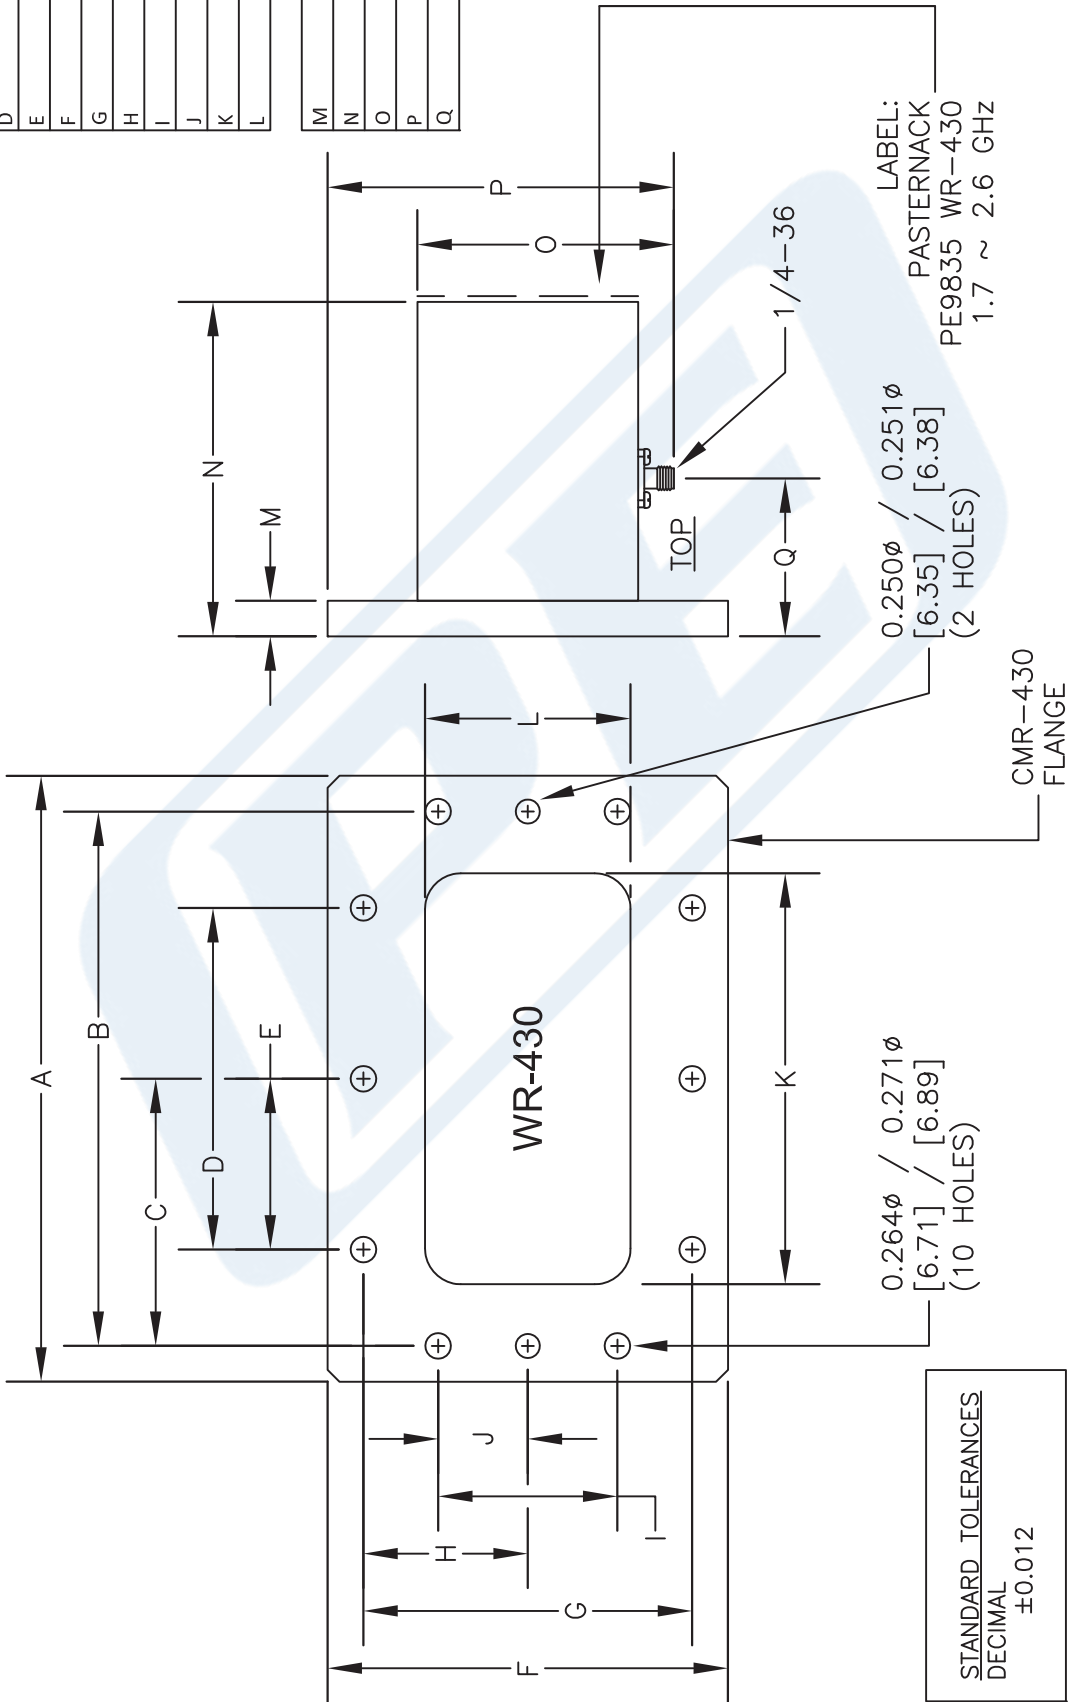

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE9835

FSCM NO. 53919

CAD FILE 041116

SCALE N/A

SIZE A

3045

PE PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com