



WR-430 CPR-430G Grooved Flange to N Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band

Waveguide to Coax Adapters Technical Data Sheet

PE9843

**Features**

- L-S Band, 1.7 to 2.6 GHz Frequency Range
- WR-430 Waveguide Interface with CPR-430G Flange
- N Female Coaxial Interface
- Comprehensive waveguide offerings also include E-Bends, H-Bends, Sections, Filters, Terminations, Couplers, and more.

**Description**

The PE9843 is a waveguide to coaxial adapter operating in the L-S band with a 1.7 to 2.6 GHz frequency range. This adapter offers a WR-430 waveguide interface size coupled with a precision tolerance CPR-430G flange. The PE9843 is constructed of aluminum to ensure durability and repeatable RF performance. The coaxial connector offered by this adapter uses an N type female connector and the package is REACH and RoHS compliant.

**Configuration**

Waveguide Size	WR-430
Flange	CPR-430G
RF Connector	N Female
Impedance	50 Ohms
Body Geometry	Right Angle

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	1.7		2.6	GHz
VSWR			1.3:1	
Input Power (Peak)			500	Watts

**Mechanical Specifications**

<b>Size</b>	
Length	6.34 in [161.04 mm]
Width	4.36 in [110.74 mm]
Height	3.5 in [88.9 mm]
Weight	1.491 lbs [676.31 g]

<b>RF Connector</b>	
Connector Type	N Female
Body Material and Plating	Stainless Steel

<b>Waveguide Interface</b>	
Waveguide Type	WR-430
Flange Type	CPR-430G
Body Material and Plating	Aluminum

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-430 CPR-430G Grooved Flange to N Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band PE9843](#)



WR-430 CPR-430G Grooved Flange to N Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band

Waveguide to Coax Adapters Technical Data Sheet

PE9843

**Environmental Specifications**

**Temperature**

Operating Range

-40 to +85 deg C


**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

- Values at +25 °C, sea level unless stated otherwise

**Typical Performance Data**

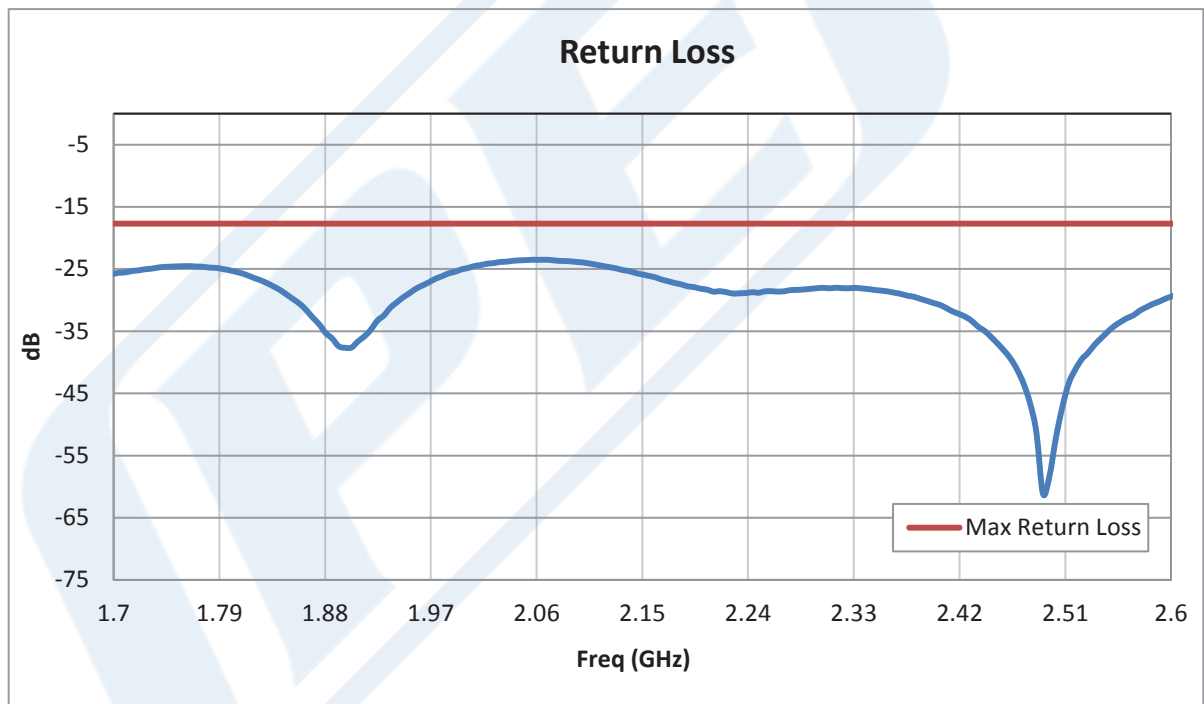

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-430 CPR-430G Grooved Flange to N Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band PE9843](#)



## WR-430 CPR-430G Grooved Flange to N Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band

### Waveguide to Coax Adapters Technical Data Sheet

PE9843

WR-430 CPR-430G Grooved Flange to N Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-430 CPR-430G Grooved Flange to N Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band PE9843](https://www.pasternack.com/grooved-wr-430-n-female-waveguide-coax-adapter-1.7-ghz-2.6-ghz-pe9843-p.aspx)

URL: <https://www.pasternack.com/grooved-wr-430-n-female-waveguide-coax-adapter-1.7-ghz-2.6-ghz-pe9843-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE9843 CAD Drawing

WR-430 CPR-430G Grooved Flange to N Female Waveguide to Coax Adapter Operating From 1.7 GHz to 2.6 GHz, L-S Band

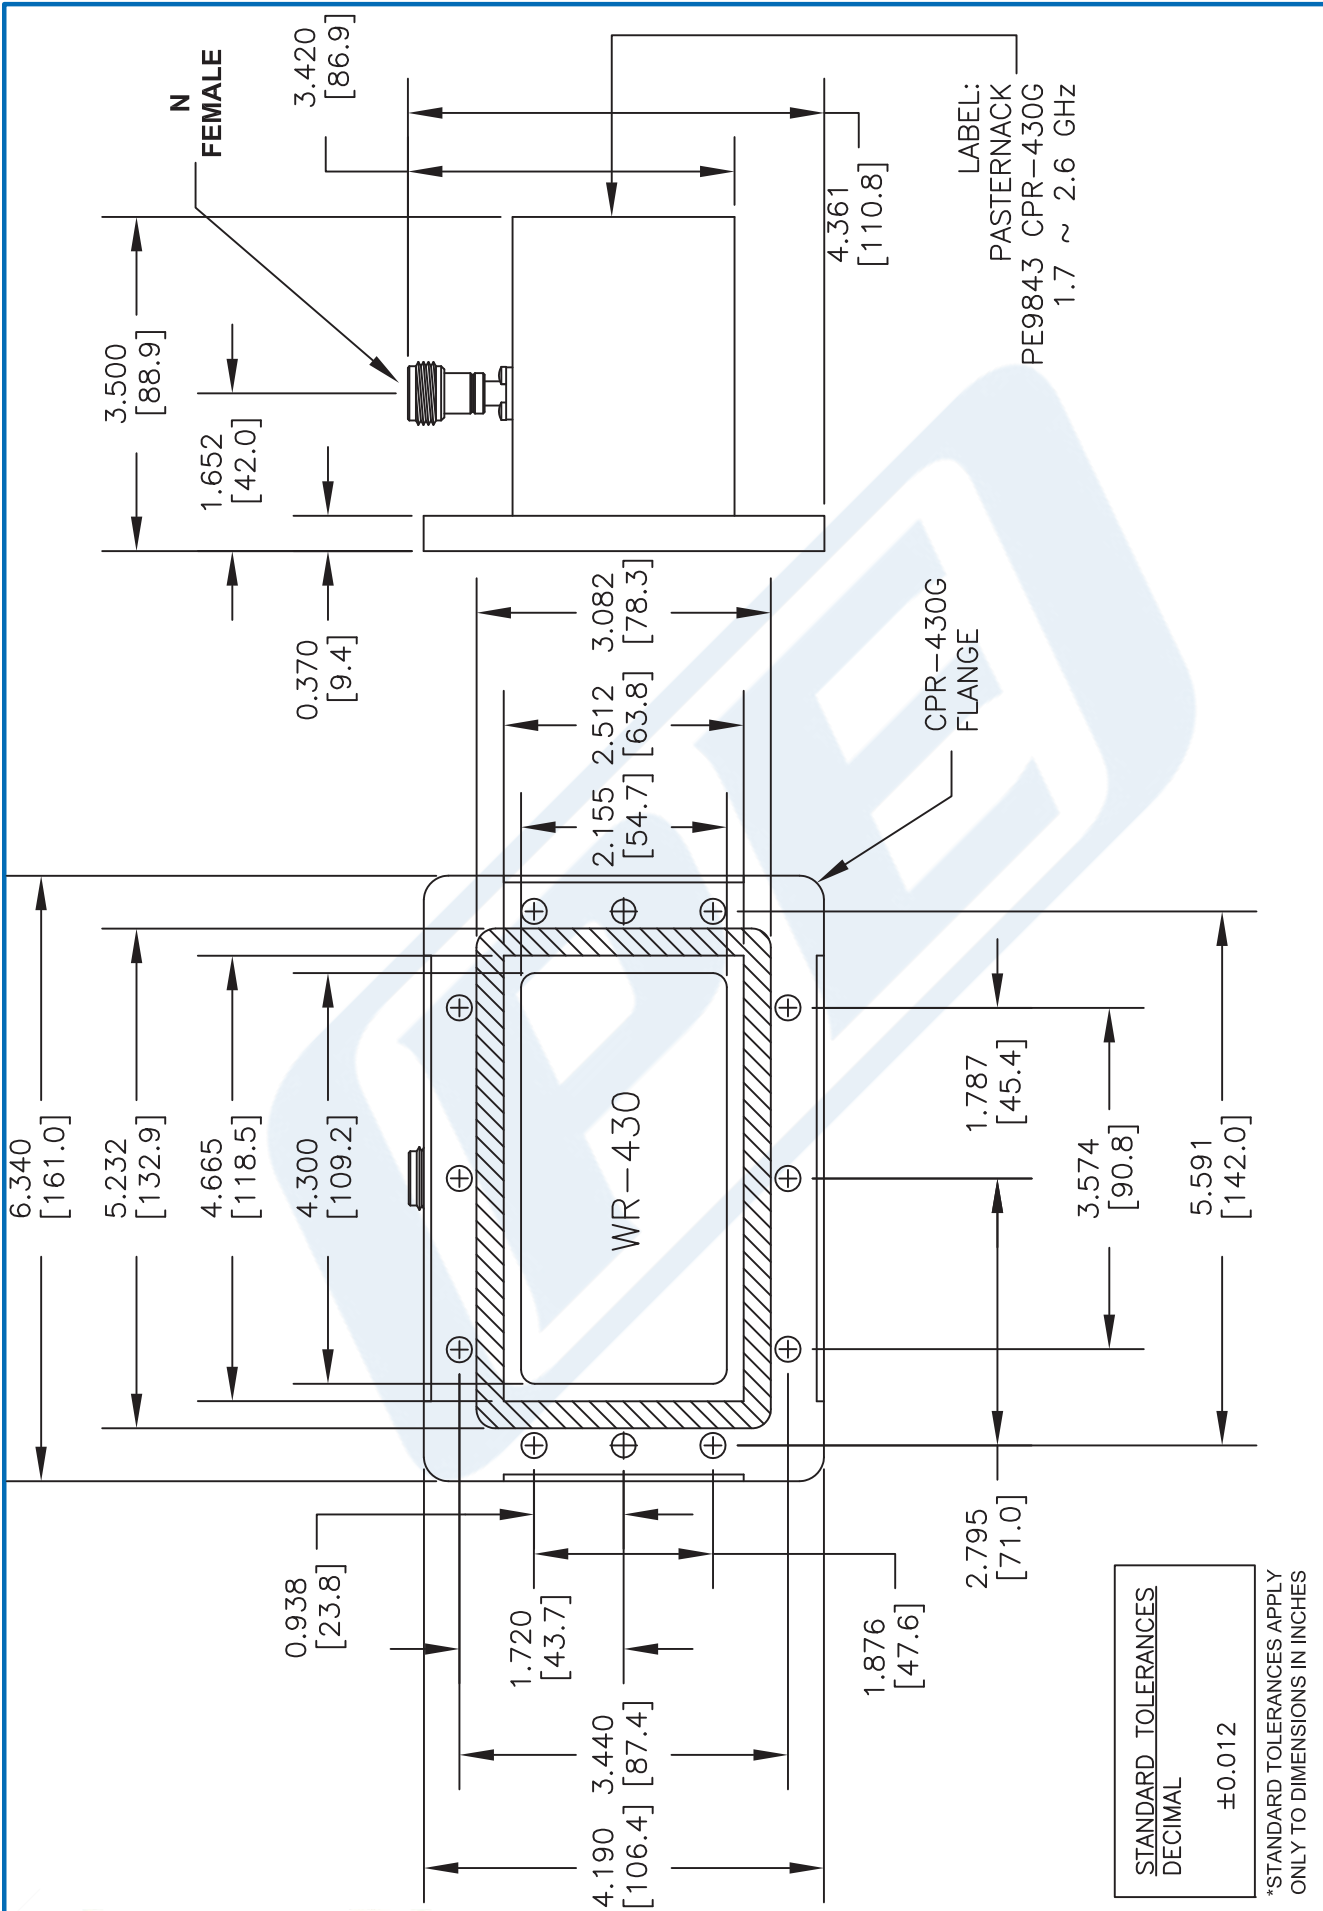

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE9843**

FSCM NO. 53919

CAD FILE 041916

SCALE N/A

SIZE A

3045

**PE PASTERNAK**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com