

2 Way WR-34 Waveguide Power Divider UG Square Cover Flange From 27 GHz to 31 GHz, Brass

Waveguide Power Dividers Technical Data Sheet

PEW34DV001

Features

- 2-Way Waveguide Power Divider
- WR-34 Waveguide Interface
- 27 to 31 GHz Frequency Range
- Max Power 4 Watts (CW)
- Insertion Loss 0.4 dB max
- Isolation 17 dB min

Applications

- Test Benches
- Radar/Satellite
- Microwave Radio
- Attenuation Measurements
- Power Measurements

Description

Pasternack carries a wide selection of waveguide power dividers to fit your needs. These components are essential in many systems, allowing the combination of multiple signals or splitting of a single signal into multiple signals with equal magnitude and phase.


The PEW34DV001 is a 2-way waveguide power divider that operates from 27 to 31 GHz and can handle up to 4 Watts (CW) with 0.4 dB max insertion loss and 17 dB min isolation. The package uses WR-34 waveguide interface.

Electrical Specifications

Number of Output Ports 2

Description	Minimum	Typical	Maximum	Units
Frequency Range	27		31	GHz
Input VSWR			1.25:1	
Output VSWR			1.25:1	
Insertion Loss			0.4	dB
Isolation	17			dB
Amplitude Balance			0.3	dB
Phase Balance			3	Degrees
Input Power (CW)			4	Watts
Input Power (Peak)			4	kWatts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way WR-34 Waveguide Power Divider UG Square Cover Flange From 27 GHz to 31 GHz, Brass PEW34DV001](#)



2 Way WR-34 Waveguide Power Divider UG Square
Cover Flange From 27 GHz to 31 GHz, Brass

Waveguide Power Dividers Technical Data Sheet

PEW34DV001

Mechanical Specifications

Size

Length	1.42 in [36.07 mm]
Width	1.97 in [50.04 mm]
Height	1.5 in [38.1 mm]
Weight	0.185 lbs [83.91 g]

Housing Material and Plating	Copper, Gray
------------------------------	--------------

Configuration

Input Waveguide Size	WR-34
Input Flange Type	UG Cover
Output Waveguide Size	WR-34
Output Flange Type	UG Cover

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

2 Way WR-34 Waveguide Power Divider UG Square Cover Flange From 27 GHz to 31 GHz, Brass from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way WR-34 Waveguide Power Divider UG Square Cover Flange From 27 GHz to 31 GHz, Brass PEW34DV001](#)

URL: <https://www.pasternack.com/pew34dv001-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEW34DV001 CAD Drawing

2 Way WR-34 Waveguide Power Divider UG Square
Cover Flange From 27 GHz to 31 GHz, Brass

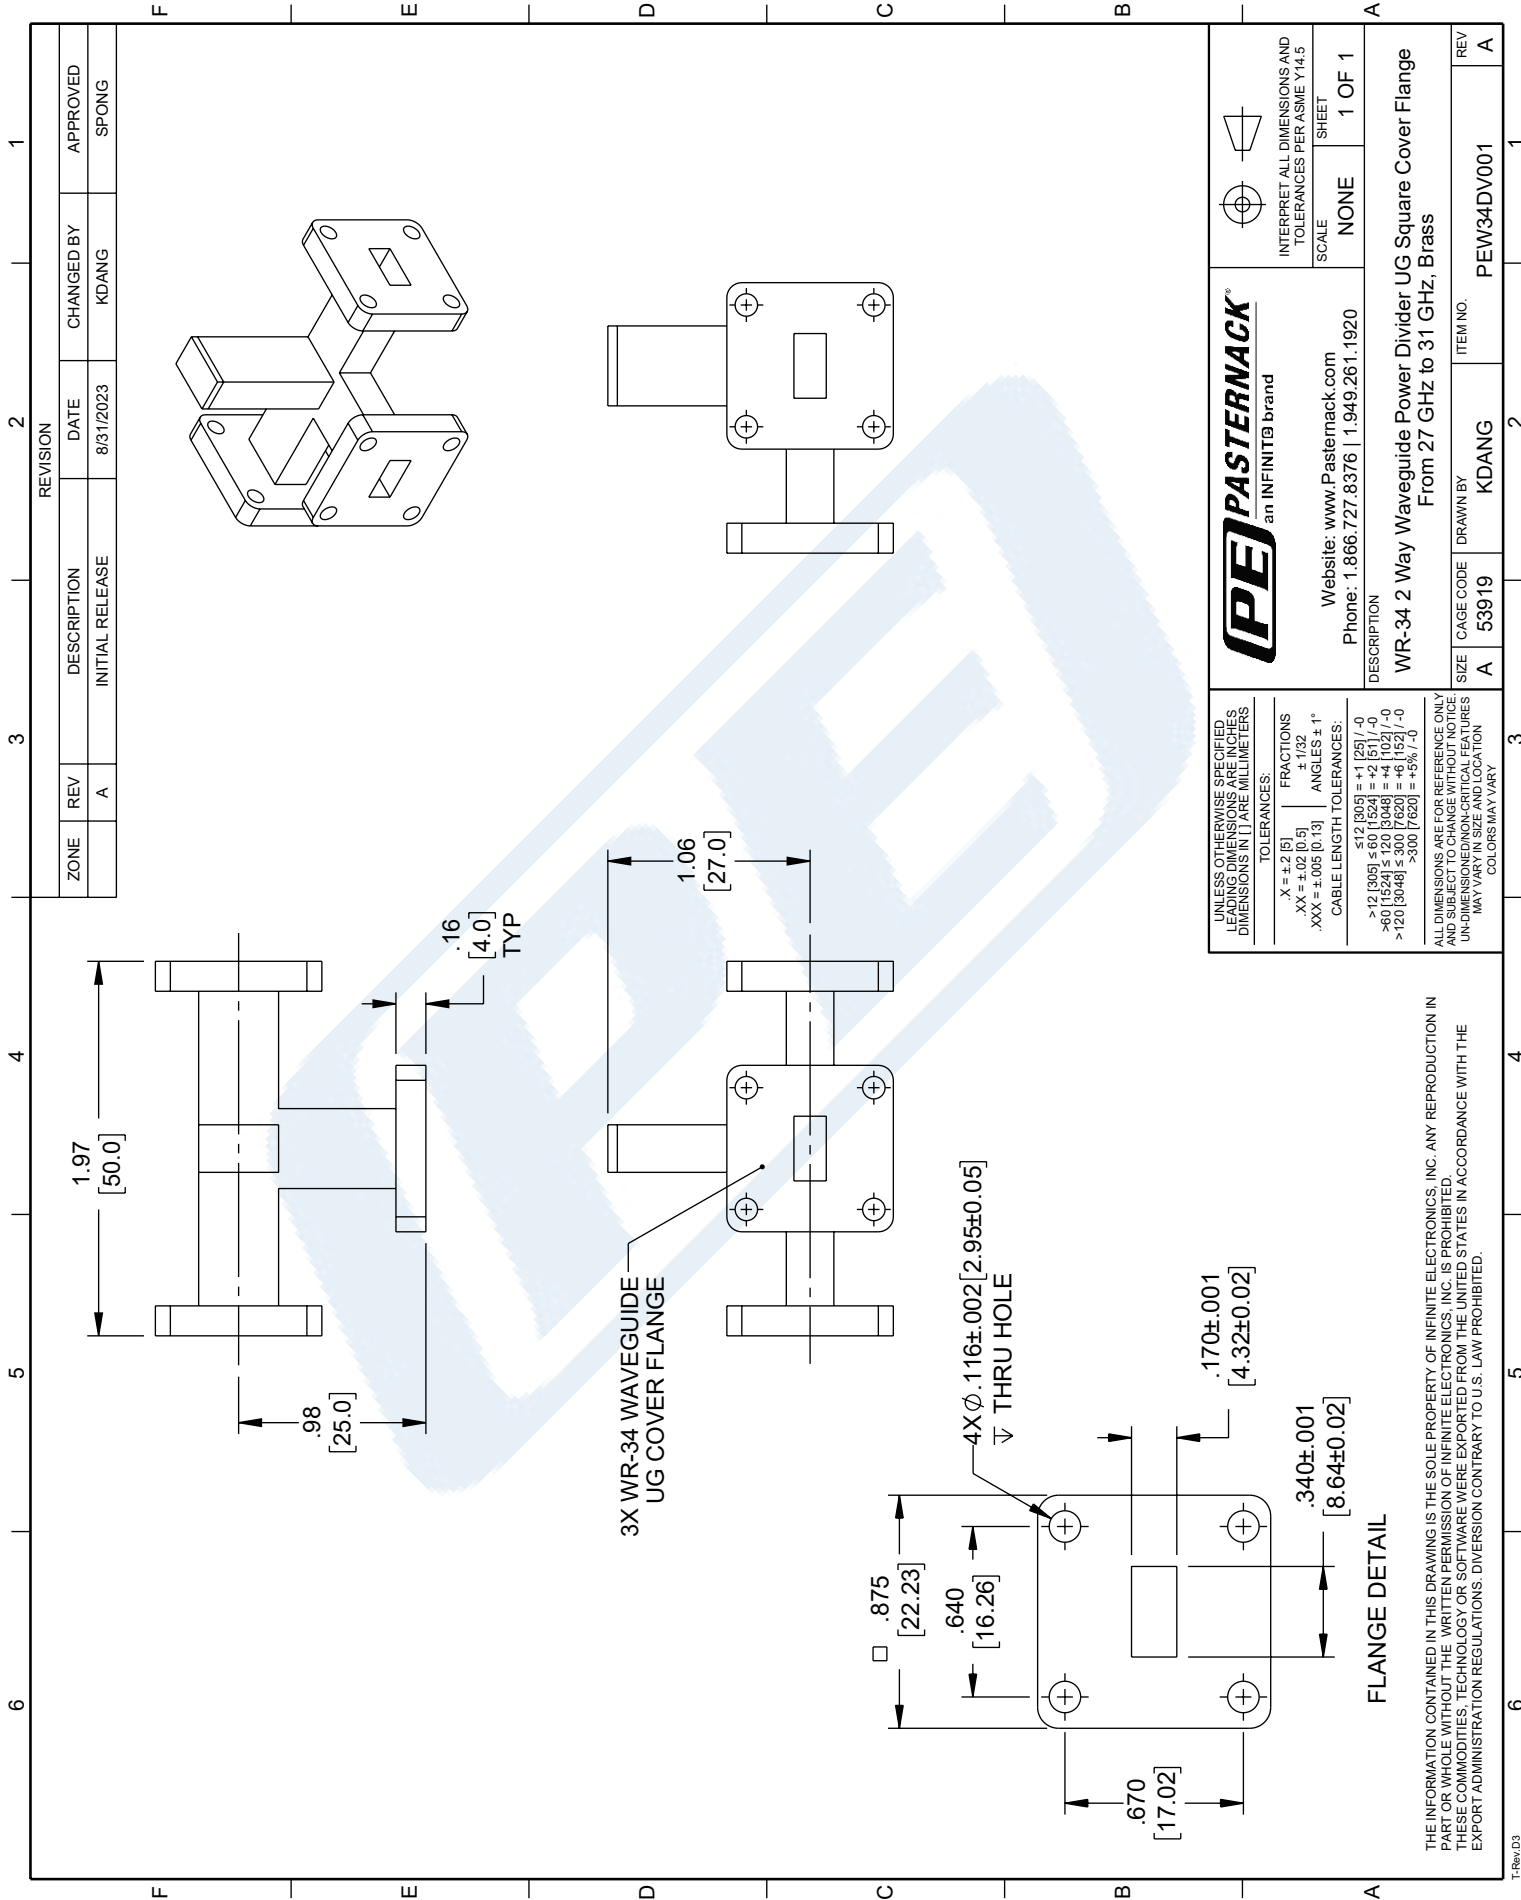

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	8/31/2023	KDANG	SPONG

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE IN MILLIMETERS.

TOLERANCES:

.X = ±.2 [5]	FRACTIONS
.XX = ±.02 [0.5]	± 1/32
.XXX = ±.005 [0.13]	ANGLES ± 1°

CABLE LENGTH TOLERANCES:

<12 [305]	±.1 [2.5]
>12 [305] ≤ 60 [1524]	±.2 [5.1]
>60 [1524] ≤ 120 [3048]	±.4 [10.2]
>120 [3048] ≤ 300 [7620]	±.6 [15.2]
>300 [7620]	±.8 [20.3]

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UNDIMENSIONED NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE: NONE

SHEET: 1 OF 1

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION: WR-34 2 Way Waveguide Power Divider UG Square Cover Flange From 27 GHz to 31 GHz, Brass

SIZE	A	CAGE CODE	53919	DRAWN BY	KDANG	ITEM NO.	PEW34DV001
REV	A						

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.