



WR-28 Waveguide Circulator, 26.5 GHz to 40 GHz,  
16 dB min Isolation, Cover Flange, Brass

## Waveguide Circulators Technical Data Sheet

**PE-W28CR001**

### Features

- WR-28 Waveguide Circulator
- Ka Band Frequency Range 26.5 to 40 GHz
- UG Cover Flange Configuration
- Maximum VSWR 1.4:1
- Minimum 16 dB isolation
- Maximum Power 15 W (CW)

### Applications

- Radar Systems
- Military
- Wireless Radio Systems
- Telecom Infrastructure
- Communication Systems
- R&D Labs
- Microwave Radio Systems

### Description

The PE-W28CR001 is a Waveguide Circulator offering 16 dB minimum isolation over the Ka band frequency range of 26.5 to 40 GHz. The design achieves high isolation with wide band performance and the WR-28 waveguide uses UG Square Cover compatible flanges on all ports and has a power rating of 15 watts (CW).

Pasternack offers a wide variety of circulators and waveguide circulators to fit your needs. These unique devices enable two signals to use one channel. The classic use of this three port device is for the line between an antenna and a transceiver, allowing the receive signal to come from the antenna (port 1) to the receiver (port 2) while the transmit signal goes from the transmitter (port 3) to the antenna (port 1). An isolator can be created by terminating one port into a matched load. These components can be used in antenna transmitting and receiving, radar, amplifier systems and anything that requires isolation from a signal reflection and the ability to send signals in opposite directions down a single channel. These circulators feature excellent insertion loss, high isolation and reliability.

### Electrical Specifications

| Description        | Minimum | Typical | Maximum | Units |
|--------------------|---------|---------|---------|-------|
| Frequency Range    | 26.5    |         | 40      | GHz   |
| VSWR               |         |         | 1.4:1   |       |
| Insertion Loss     |         |         | 0.4     | dB    |
| Isolation          | 16      |         |         | dB    |
| Forward Power (CW) |         |         | 15      | Watts |
| Input Power (Peak) |         |         | 300     | Watts |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-28 Waveguide Circulator, 26.5 GHz to 40 GHz, 16 dB min Isolation, Cover Flange, Brass PE-W28CR001](#)



WR-28 Waveguide Circulator, 26.5 GHz to 40 GHz,  
16 dB min Isolation, Cover Flange, Brass

## Waveguide Circulators Technical Data Sheet

**PE-W28CR001**

### Mechanical Specifications

#### Size

|        |                    |
|--------|--------------------|
| Length | 0.98 in [24.89 mm] |
| Width  | 0.98 in [24.89 mm] |
| Height | 0.98 in [24.89 mm] |
| Weight | 0.1 lbs [45.36 g]  |

|                             |             |
|-----------------------------|-------------|
| Waveguide Size              | WR-28       |
| Flange Designation          | None        |
| Flange Type                 | Cover       |
| Flange Material and Plating | Brass, Gold |


### Environmental Specifications

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

#### Typical Performance Data

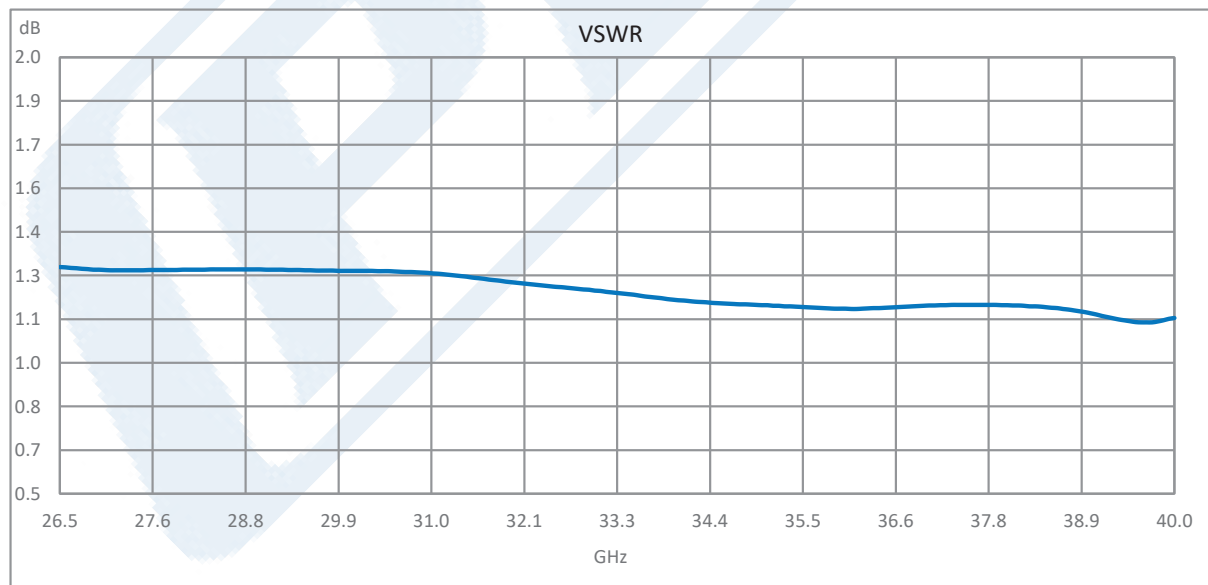


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-28 Waveguide Circulator, 26.5 GHz to 40 GHz, 16 dB min Isolation, Cover Flange, Brass PE-W28CR001](#)



WR-28 Waveguide Circulator, 26.5 GHz to 40 GHz,  
16 dB min Isolation, Cover Flange, Brass

## Waveguide Circulators Technical Data Sheet

**PE-W28CR001**

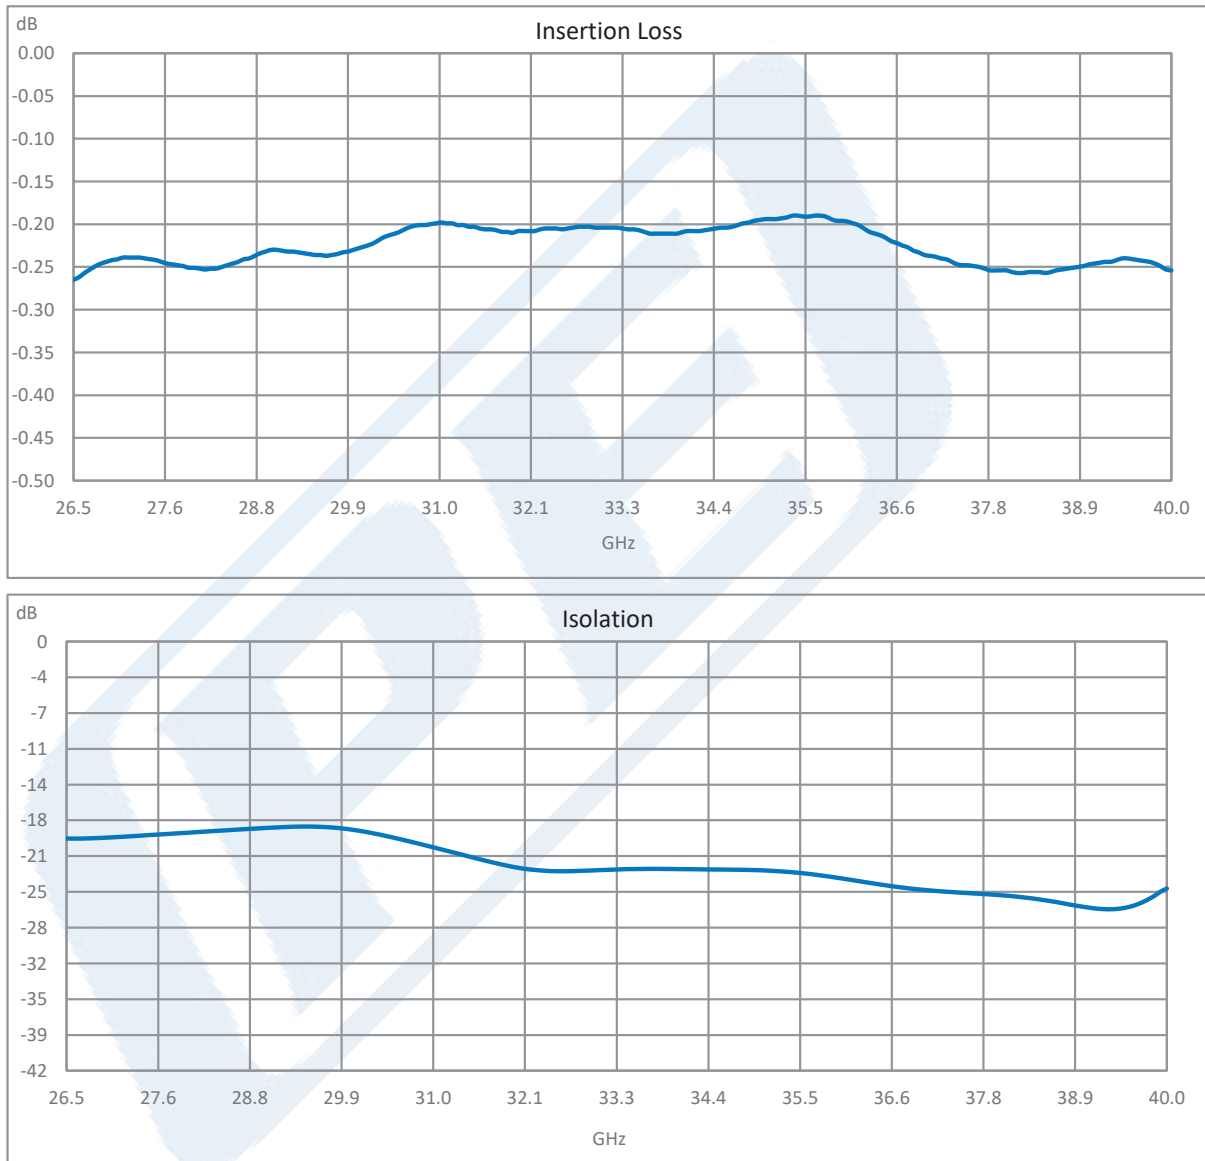

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-28 Waveguide Circulator, 26.5 GHz to 40 GHz, 16 dB min Isolation, Cover Flange, Brass PE-W28CR001](#)



WR-28 Waveguide Circulator, 26.5 GHz to 40 GHz,  
16 dB min Isolation, Cover Flange, Brass

## Waveguide Circulators Technical Data Sheet

**PE-W28CR001**

WR-28 Waveguide Circulator, 26.5 GHz to 40 GHz, 16 dB min Isolation, Cover Flange, Brass from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-28 Waveguide Circulator, 26.5 GHz to 40 GHz, 16 dB min Isolation, Cover Flange, Brass PE-W28CR001](#)

URL:

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

WR-28 Waveguide Circulator, 26.5 GHz to 40 GHz, 16 dB min Isolation, Cover Flange, Brass

[illegible]

|      |           |          |             |     |
|------|-----------|----------|-------------|-----|
| SIZE | CAGE CODE | DRAWN BY | ITEM NO.    | REV |
| A    | 53919     | DMAY     | PE-W28CR001 | A   |

$$0.1\% \text{ C} = [0.29] \text{ MC}$$

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.