

## BNC Male to BNC Male Cable 36 Inch Length Using PE-C200 Coax

### PE35256-36




#### Configuration

- Connector 1: BNC Male
- Connector 2: BNC Male
- Cable Type: PE-C200
- Coax Flex Type: Flexible

#### Features

- Shielding Effectivity > 90 dB
- 83% Phase Velocity
- Double Shielded
- PE Jacket

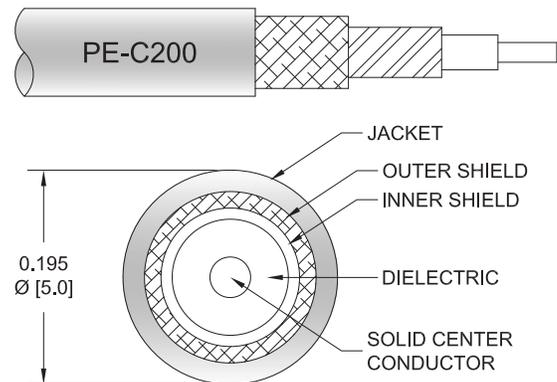

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE35256-36 BNC male to BNC male 36 inch cable using PE-C200 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to BNC cable assembly has a male to male gender configuration with 50 ohm flexible PE-C200 coax. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		83		%
RF Shielding	90			dB
Capacitance		24.5 [80.38]		pF/ft [pF/m]
Jacket Spark			3,000	Vrms

#### Mechanical Specifications

##### Cable Assembly

Length	36 in [914.4 mm]
Weight	0.146 lbs [66.22 g]

##### Cable

Cable Type	PE-C200
Impedance	50 Ohms

## BNC Male to BNC Male Cable 36 Inch Length Using PE-C200 Coax



### PE35256-36

Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.195 in [4.95 mm]

### Connectors

Description	Connector 1	Connector 2
Type	BNC Male	BNC Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Body Material and Plating	Brass, Nickel	Brass, Nickel

### Environmental Specifications

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:  
Values at 25°C, sea level.

## BNC Male to BNC Male Cable 36 Inch Length Using PE-C200 Coax




### PE35256-36

#### Typical Performance Data

#### How to Order

Part Number Configuration:

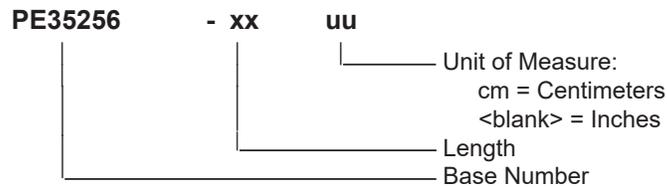

Example: PE35256-12 = 12 inches long cable  
PE35256-100cm = 100 cm long cable

BNC Male to BNC Male Cable 36 Inch Length Using PE-C200 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable 36 Inch Length Using PE-C200 Coax PE35256-36](https://www.pasternack.com/bnc-male-bnc-male-pe-c200-cable-assembly-pe35256-36-p.aspx)

URL: <https://www.pasternack.com/bnc-male-bnc-male-pe-c200-cable-assembly-pe35256-36-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE35256-36 CAD Drawing

BNC Male to BNC Male Cable 36 Inch Length Using PE-C200 Coax

