

Fire Rated N Male Right Angle to N Male Right Angle Low Loss Cable Using TCOM-400-FR Coax With Times Microwave Components

PE3C10415




Configuration

- Connector 1: N Male Right Angle
- Connector 2: N Male Right Angle
- Cable Type: TCOM-400-FR
- Coax Flex Type: Flexible

Features

- Max Frequency 10 GHz
- Shielding Effectivity > 100 dB
- 85% Phase Velocity
- Double Shielded
- PE Jacket
- 500 Mating Cycles

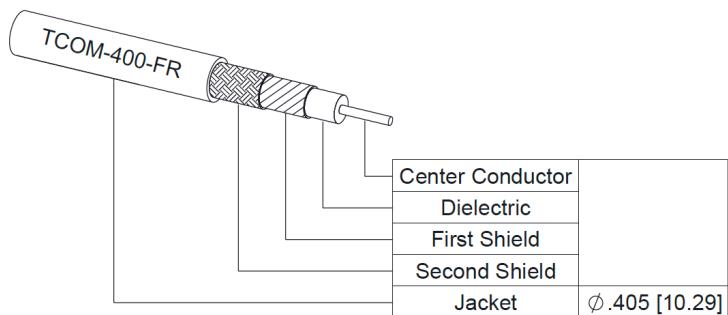

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C10415 type N male right angle to type N male right angle cable using TCOM-400-FR coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible TCOM-400-FR coax. The PE3C10415 type N male to type N male cable assembly operates to 10 GHz. The right angle type N interfaces on the TCOM-400-FR cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 100 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		10	GHz
VSWR			1.4:1	
Velocity of Propagation		85		%
RF Shielding	100			dB
Group Delay		1.2 [3.94]		ns/ft [ns/m]
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		1.39 [4.56]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		1.47 [4.82]		Ohms/1000ft [Ohms/Km]

Fire Rated N Male Right Angle to N Male
Right Angle Low Loss Cable Using TCOM-400-FR Coax With Times Microwave Components



PE3C10415

Electrical Specifications

Description	Minimum	Typical					Maximum	Units
Jacket Spark						8,000		Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	500	1000	2500	5000	10000	MHz	
PE3C10415	Custom Lengths Available	Insertion Loss (Typ.)	0.03	0.044	0.072	0.092	0.157	dB/ft	
			0.1	0.15	0.24	0.31	0.52	dB/m	
PE3C10415-12	12 inch	Insertion Loss (Typ.)	0.43	0.45	0.48	0.5	0.56	dB	0.352
PE3C10415-24	24 inch	Insertion Loss (Typ.)	0.46	0.49	0.55	0.59	0.72	dB	0.432
PE3C10415-36	36 inch	Insertion Loss (Typ.)	0.49	0.54	0.62	0.68	0.88	dB	0.512
PE3C10415-48	48 inch	Insertion Loss (Typ.)	0.52	0.58	0.69	0.77	1.03	dB	0.592
PE3C10415-60	60 inch	Insertion Loss (Typ.)	0.55	0.62	0.76	0.86	1.19	dB	0.672

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.2 dB
Loss due to Connector 2:	0.2 dB
Base Weight:	0.352 pounds
Additional Weight per Inch:	0.00666 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.352 lbs [159.66 g]

Cable

Cable Type	TCOM-400-FR
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Aluminum
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.405 in [10.29 mm]
One Time Minimum Bend Radius	1 in [25.4 mm]
Repeated Minimum Bend Radius	4 in [101.6 mm]
Bending Moment	0.5 lbs·ft [0.68 N·m]
Flat Plate Crush	40 lbs/in [0.71 Kg/mm]
Tensile Strength	160 lbs [72.57 Kg]

Fire Rated N Male Right Angle to N Male
Right Angle Low Loss Cable Using TCOM-400-
FR Coax With Times Microwave Components



PE3C10415

Connectors

Description	Connector 1	Connector 2
Type	N Male Right Angle	N Male Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Right Angle
Mating Cycles	500	500
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Hex Size	13/16 inch	13/16 inch
Torque	30 in-lbs 3.39 Nm	30 in-lbs 3.39 Nm

Environmental Specifications

Operating Range Temperature -40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Fire Rated N Male Right Angle to N Male
Right Angle Low Loss Cable Using TCOM-400-
FR Coax With Times Microwave Components




PE3C10415

Typical Performance Data

How to Order

Part Number Configuration:

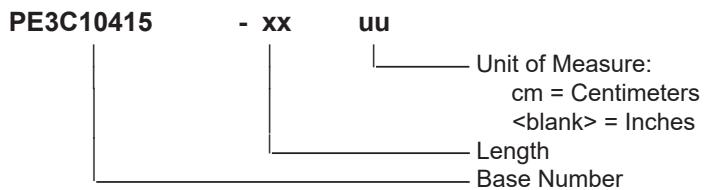

Example: PE3C10415-12 = 12 inches long cable
PE3C10415-100cm = 100 cm long cable

Fire Rated N Male Right Angle to N Male Right Angle Low Loss Cable Using TCOM-400-FR Coax With Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Fire Rated N Male Right Angle to N Male Right Angle Low Loss Cable Using TCOM-400-FR Coax With Times Microwave Components PE3C10415](#)

URL: <https://www.pasternack.com/fire-rated-n-male-right-angle-to-n-male-low-loss-cable-using-tcom-400-fr-pe3c10415-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C10415 CAD Drawing

Fire Rated N Male Right Angle to N Male Right Angle Low Loss Cable Using
TCOM-400-FR Coax With Times Microwave Components

