

## MMCX Plug Right Angle to MMCX Plug Right Angle Cable Using RG405 Coax




### PE3C1559

#### Configuration

- Connector 1: MMCX Plug Right Angle
- Connector 2: MMCX Plug Right Angle
- Cable Type: RG405
- Coax Flex Type: Semi-Rigid

#### Features

- Max Frequency 6 GHz

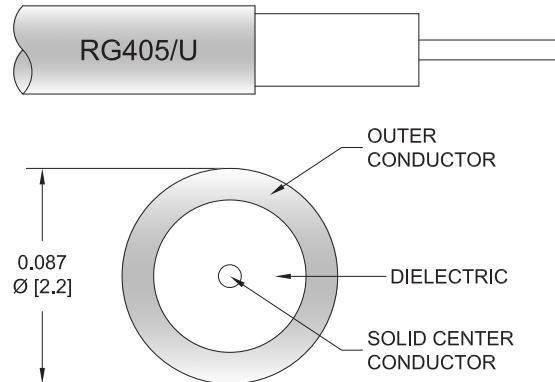

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C1559 MMCX plug right angle to MMCX plug right angle cable using RG405 coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack MMCX to MMCX cable assembly has a plug to plug gender configuration with 50 ohm semi-rigid RG405 coax. The PE3C1559 MMCX plug to MMCX plug cable assembly operates to 6 GHz. The right angle MMCX interfaces on the RG405 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz

#### Specifications by Frequency

## MMCX Plug Right Angle to MMCX Plug Right Angle Cable Using RG405 Coax



### PE3C1559

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
PE3C1559	Custom Lengths Available	Insertion Loss (Typ.)	0.06	0.11	0.22	0.32	0.542	dB/ft	
			0.19	0.37	0.73	1.04	1.78	dB/m	
PE3C1559-6	6 inch	Insertion Loss (Typ.)	0.43	0.46	0.51	0.56	0.68	dB	0.015
PE3C1559-12	12 inch	Insertion Loss (Typ.)	0.46	0.51	0.62	0.72	0.95	dB	0.021
PE3C1559-18	18 inch	Insertion Loss (Typ.)	0.49	0.57	0.73	0.88	1.22	dB	0.028
PE3C1559-24	24 inch	Insertion Loss (Typ.)	0.51	0.62	0.84	1.04	1.49	dB	0.035
PE3C1559-36	36 inch	Insertion Loss (Typ.)	0.57	0.73	1.06	1.35	2.03	dB	0.048

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.2 dB

Loss due to Connector 2: 0.2 dB

Base Weight: 0.021 pounds

Additional Weight per Inch: 0.00109 pounds

## Mechanical Specifications

### Cable Assembly

Width/Diameter 0.5 in [12.7 mm]  
Weight 0.021 lbs [9.53 g]

### Cable

Cable Type	RG405
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Copper
Jacket Material	Tan

## Connectors

Description	Connector 1	Connector 2
Type	MMCX Plug Right Angle	MMCX Plug Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Right Angle
Contact Material and Plating	Phosphor Bronze, Gold	Phosphor Bronze, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Gold

## MMCX Plug Right Angle to MMCX Plug Right Angle Cable Using RG405 Coax



### PE3C1559

#### Environmental Specifications

**Compliance Certifications** (see product page for current document)

#### Plotted and Other Data


Notes:

Values at 25°C, sea level.

#### Typical Performance Data

#### How to Order

Part Number Configuration:

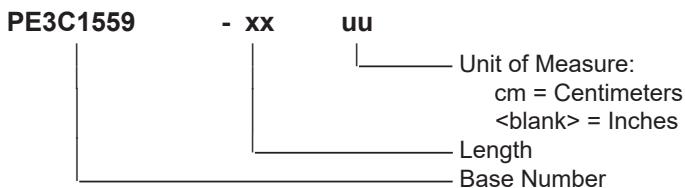

Example: PE3C1559-12 = 12 inches long cable  
PE3C1559-100cm = 100 cm long cable

MMCX Plug Right Angle to MMCX Plug Right Angle Cable Using RG405 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug Right Angle to MMCX Plug Right Angle Cable Using RG405 Coax PE3C1559](#)

URL: <https://www.pasternack.com/mmcx-plug-right-angle-to-mmcx-plug-cable-using-rg405-pe3c1559-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C1559 CAD Drawing

MMCX Plug Right Angle to MMCX Plug Right Angle Cable Using RG405 Coax

