

BNC Male to SMB Plug Cable Using RG316-DS Coax




PE3C335

Configuration

- Connector 1: BNC Male
- Connector 2: SMB Plug
- Cable Type: RG316-DS
- Coax Flex Type: Flexible

Features

- Max Frequency 3 GHz
- 70% Phase Velocity
- Double Shielded
- FEP Jacket

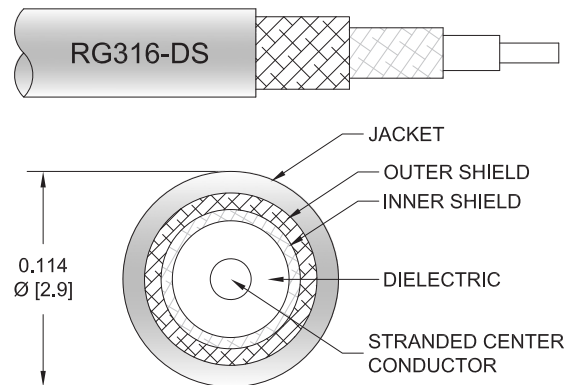

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C335 BNC male to SMB plug cable using RG316-DS coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to SMB cable assembly has a male to plug gender configuration with 50 ohm flexible RG316-DS coax. The PE3C335 BNC male to SMB plug cable assembly operates to 3 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR		1.4:1		
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			335	Vrms

Specifications by Frequency

BNC Male to SMB Plug Cable Using RG316-DS Coax



PE3C335

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	100	250	500	1000	3000	MHz	
PE3C335	Custom Lengths Available	Insertion Loss (Typ.)	0.08	0.13	0.194	0.29	0.535	dB/ft	
			0.27	0.42	0.64	0.96	1.76	dB/m	
PE3C335-6	6 inch	Insertion Loss (Typ.)	0.25	0.27	0.3	0.35	0.47	dB	0.109
PE3C335-12	12 inch	Insertion Loss (Typ.)	0.29	0.33	0.4	0.49	0.74	dB	0.116
PE3C335-24	24 inch	Insertion Loss (Typ.)	0.37	0.46	0.59	0.78	1.27	dB	0.131
PE3C335-36	36 inch	Insertion Loss (Typ.)	0.45	0.59	0.79	1.07	1.81	dB	0.145
PE3C335-48	48 inch	Insertion Loss (Typ.)	0.53	0.72	0.98	1.36	2.34	dB	0.159

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.116 pounds
Additional Weight per Inch:	0.00117 pounds

Mechanical Specifications

Cable Assembly

Weight	0.116 lbs [52.62 g]
--------	---------------------

Cable

Cable Type	RG316-DS
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.114 in [2.9 mm]
Repeated Minimum Bend Radius	0.6 in [15.24 mm]

BNC Male to SMB Plug Cable Using RG316-DS Coax



PE3C335

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	SMB Plug
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	50 µin minimum	30 µin minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 µin minimum	

Environmental Specifications

Operating Range Temperature -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

BNC Male to SMB Plug Cable Using RG316-DS Coax



PE3C335

Typical Performance Data

How to Order

Part Number Configuration:

PE3C335

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches

Length

Base Number

Example: PE3C335-12 = 12 inches long cable
PE3C335-100cm = 100 cm long cable


BNC Male to SMB Plug Cable Using RG316-DS Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMB Plug Cable Using RG316-DS Coax PE3C335](#)

URL: <https://www.pasternack.com/bnc-male-to-smb-plug-cable-using-rg316-ds-pe3c335-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C335 CAD Drawing
BNC Male to SMB Plug Cable Using RG316-DS Coax

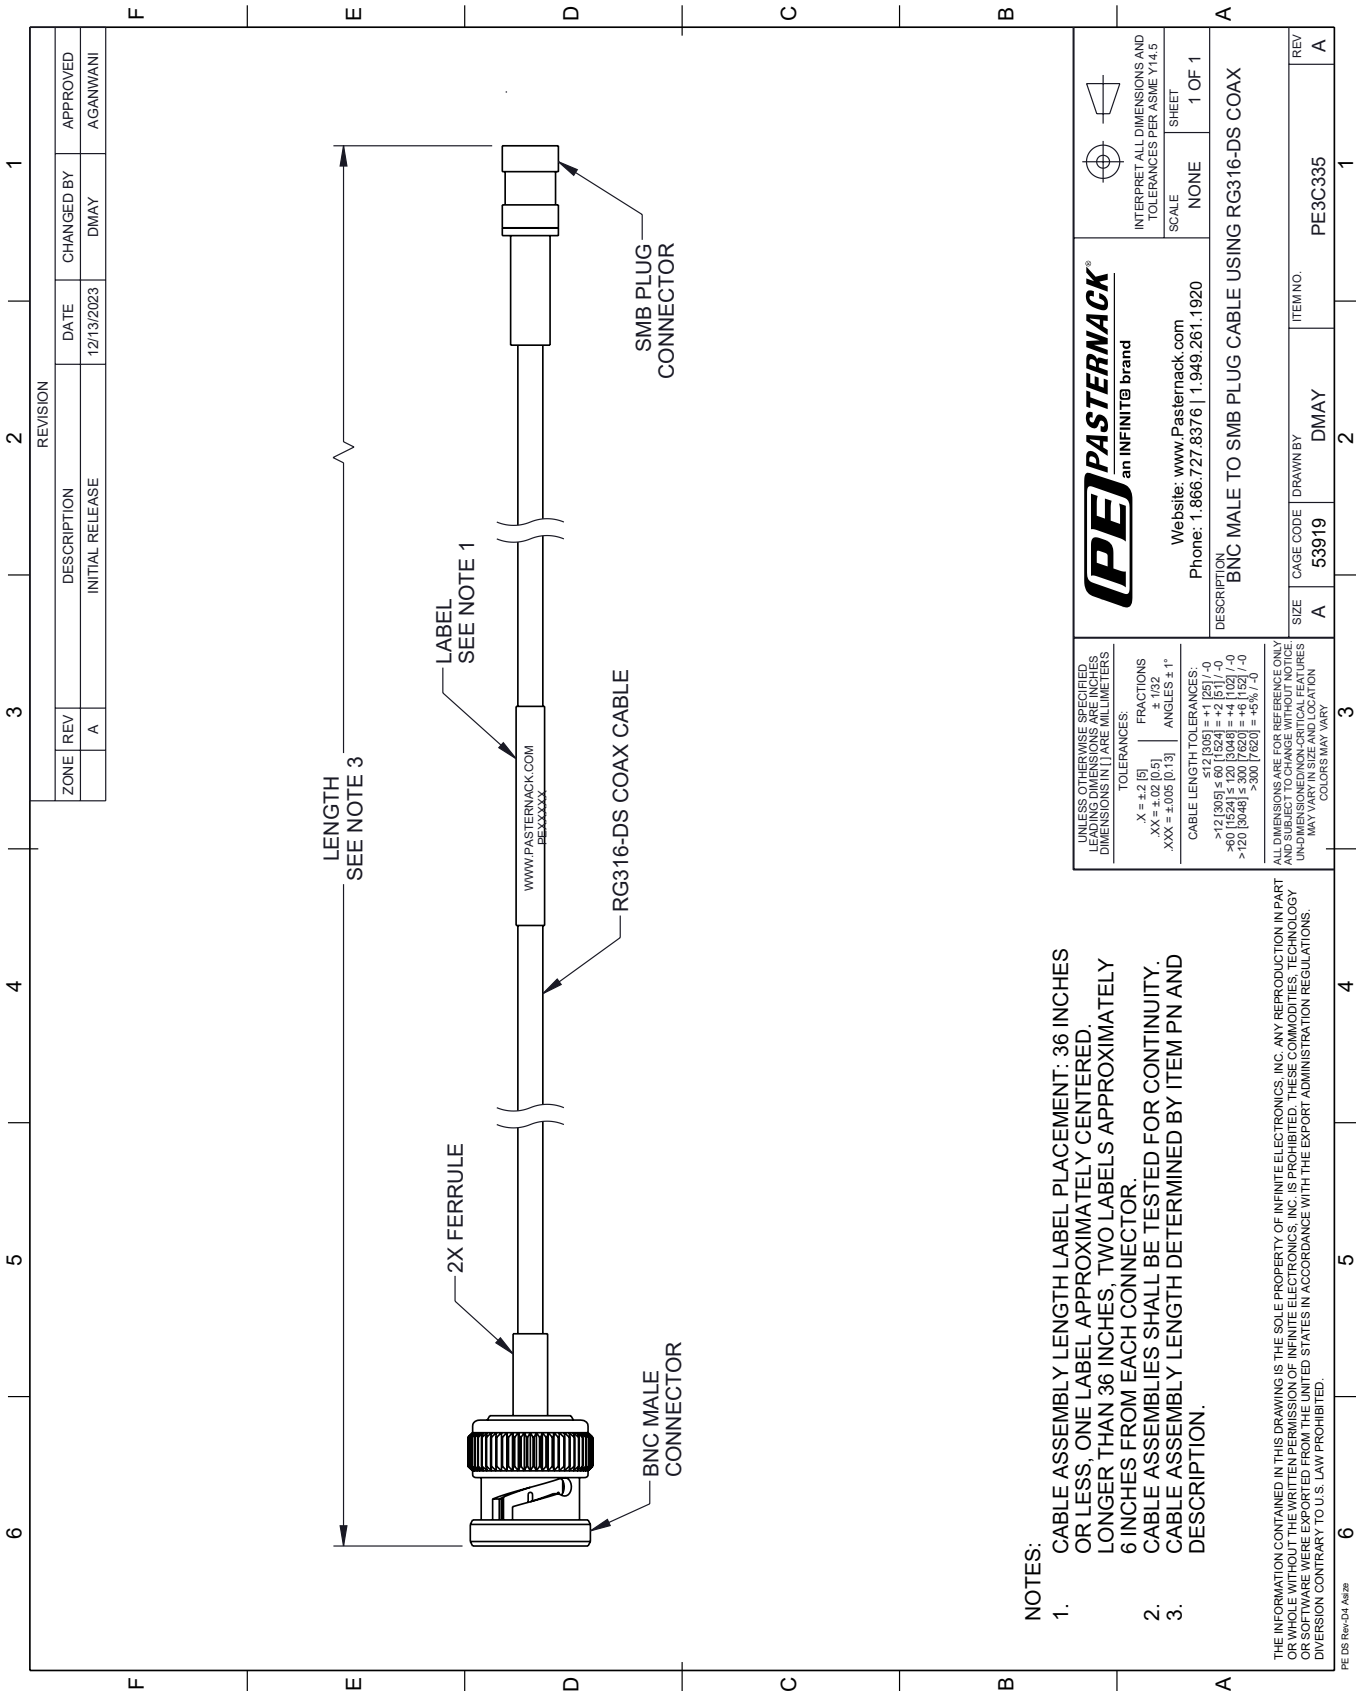

- NOTES:
1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLY LENGTH SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.