



BNC Male to SMA Female Bulkhead Low Loss Cable Using LMR-100 Coax

TECHNICAL DATA SHEET


PE3C4528

Configuration

- Connector 1: BNC Male
- Connector 2: SMA Female Bulkhead
- Cable Type: LMR-100A
- Coax Flex Type: Flexible

Features

- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

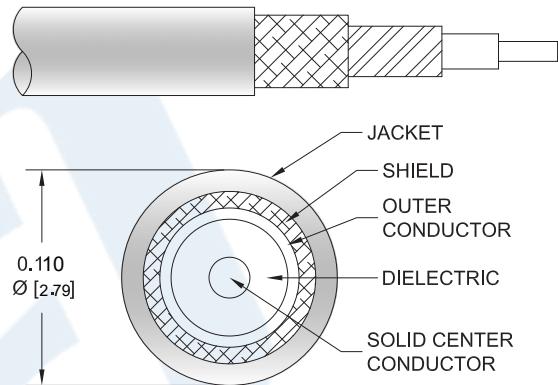

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C4528 BNC male to SMA female bulkhead cable using LMR-100 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to SMA cable assembly has a male to female gender configuration with 50 ohm flexible LMR-100A coax. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMA Female Bulkhead Low Loss Cable Using LMR-100 Coax PE3C4528](#)



BNC Male to SMA Female Bulkhead Low Loss Cable Using LMR-100 Coax

TECHNICAL DATA SHEET

PE3C4528

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		9.5 [31.17]		Ω/1000ft [Ω/Km]
Jacket Spark			2,000	Vrms

Mechanical Specifications

Cable Assembly

Weight 0.044 lbs [19.96 g]

Cable

Cable Type LMR-100A
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper Clad Steel
Dielectric Type PE
Number of Shields 2
Shield Layer 1 Aluminum Tape
Shield Layer 2 Tinned Copper Braid
Jacket Material PVC, Black
Jacket Diameter 0.11 in [2.79 mm]

One Time Minimum Bend Radius 0.25 in [6.35 mm]
Repeated Minimum Bend Radius 1 in [25.4 mm]
Bending Moment 0.1 lbs-ft [0.14 N-m]
Flat Plate Crush 10 lbs/in [0.18 Kg/mm]
Tensile Strength 15 lbs [6.8 Kg]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMA Female Bulkhead Low Loss Cable Using LMR-100 Coax PE3C4528](#)



BNC Male to SMA Female Bulkhead Low Loss Cable Using LMR-100 Coax

TECHNICAL DATA SHEET

PE3C4528

Connectors

Description	Connector 1	Connector 2
Type	BNC Male Bayonet	SMA Female Bulkhead Threaded
Specification	MIL-STD-348A	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	50 μ in minimum	MIL-G-45204
Dielectric Type	PTFE	
Outer Conductor Material and Plating		Brass, Nickel
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 μ in minimum	

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMA Female Bulkhead Low Loss Cable Using LMR-100 Coax PE3C4528](#)



BNC Male to SMA Female Bulkhead Low Loss Cable Using LMR-100 Coax

TECHNICAL DATA SHEET

PE3C4528

How to Order

Part Number Configuration:

PE3C4528- **xx****uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C4528-12 = 12 inches long cable
PE3C4528-100cm = 100 cm long cable

BNC Male to SMA Female Bulkhead Low Loss Cable Using LMR-100 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMA Female Bulkhead Low Loss Cable Using LMR-100 Coax PE3C4528](#)


URL: <https://www.pasternack.com/bnc-male-to-sma-female-bulkhead-low-loss-cable-using-lmr-100-pe3c4528-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C4528 CAD Drawing

BNC Male to SMA Female Bulkhead Low Loss Cable Using LMR-100 Coax

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
A		INITIAL RELEASE	09/27/2023	HBAKKE	AGANWANI

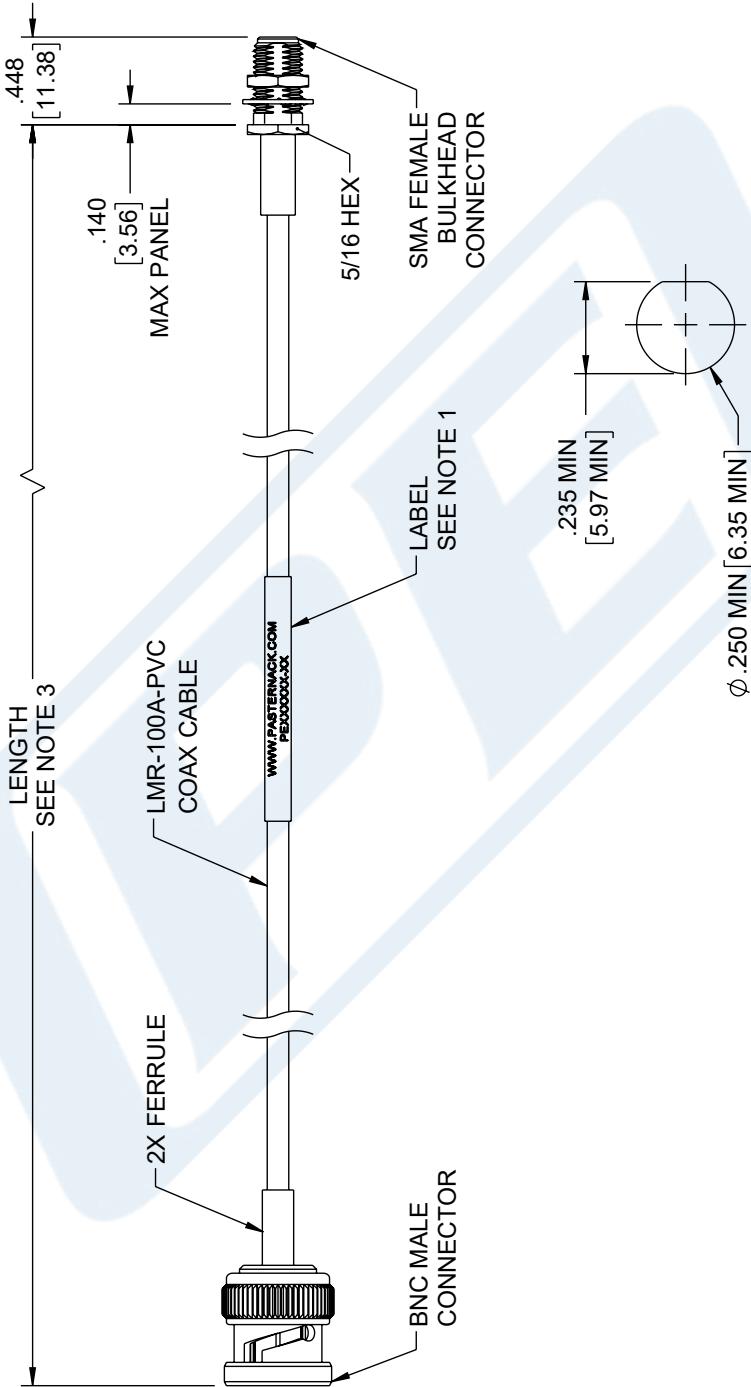

NOTES.

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6
INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND
DESCRIPTION.

RECOMMENDED
MOUNTING HOLE

PASTERNACK® an INFINIT® brand											
<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE IN MILLIMETERS</p> <p>TOLERANCES:</p> <table border="1"> <tr> <td>$X = \pm 2.2 [5]$</td> <td>FRACTIONS $\pm 1/32$</td> </tr> <tr> <td>$XX = \pm 0.02 [0.13]$</td> <td>ANGLES $\pm 1^\circ$</td> </tr> <tr> <td colspan="2">CABLE LENGTH TOLERANCES:</td> </tr> <tr> <td colspan="2"> $\leq 12 [305] = \pm 1 [25] / -0$ $> 12 [305] \leq 60 [1524] = \pm 2 [51] / -0$ $> 60 [1524] \leq 120 [3048] = \pm 4 [102] / -0$ $> 120 [3048] \leq 300 [7620] = \pm 6 [152] / -0$ $> 300 [7620] = \pm 5% / -0$ </td> </tr> </table>				$X = \pm 2.2 [5]$	FRACTIONS $\pm 1/32$	$XX = \pm 0.02 [0.13]$	ANGLES $\pm 1^\circ$	CABLE LENGTH TOLERANCES:		$\leq 12 [305] = \pm 1 [25] / -0$ $> 12 [305] \leq 60 [1524] = \pm 2 [51] / -0$ $> 60 [1524] \leq 120 [3048] = \pm 4 [102] / -0$ $> 120 [3048] \leq 300 [7620] = \pm 6 [152] / -0$ $> 300 [7620] = \pm 5% / -0$	
$X = \pm 2.2 [5]$	FRACTIONS $\pm 1/32$										
$XX = \pm 0.02 [0.13]$	ANGLES $\pm 1^\circ$										
CABLE LENGTH TOLERANCES:											
$\leq 12 [305] = \pm 1 [25] / -0$ $> 12 [305] \leq 60 [1524] = \pm 2 [51] / -0$ $> 60 [1524] \leq 120 [3048] = \pm 4 [102] / -0$ $> 120 [3048] \leq 300 [7620] = \pm 6 [152] / -0$ $> 300 [7620] = \pm 5% / -0$											
<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> <p>SCALE SHEET</p> <p>WEBSITE: www.Pasternack.com</p> <p>PHONE: 1.866.727.8376 1.949.261.1920</p> <p>DESCRIPTION</p> <p>BNC MALE TO SMA FEMALE BULKHEAD LOW LOSS CABLE USING LMR-100 COAX</p>											
SIZE A	CAGE CODE 53919	DRAWN BY HBAKKE	ITEM NO. PE3C4528								
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE UNDIMENSIONED NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION COLORS MAY VARY		REV A									

THE INFORMATION CONTAINED IN THIS BERMINGHAM IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE, WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THIS BERMINGHAM IS EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE COMMUNITIES, TECHNOLOGY OR SOFTWARE, WHETHER EXPORTED FROM THE UNITED STATES OR NOT, ARE SUBJECT TO EXPORT CONTROL LAWS OF THE UNITED STATES AND THE BERMINGHAM IS SUBJECT TO DIVERSION CONTROL. THESE ADMINISTRATIVE REGULATIONS, DIVERSION CONTROL, TOOLS, LAW PROHIBITED