

## SMA Male Right Angle to N Male Cable Using RG142 Coax




**PE3379**

### Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: N Male
- Cable Type: RG142
- Coax Flex Type: Flexible

### Features

- Max Frequency 8 GHz
- Shielding Effectivity > 90 dB
- 69.2% Phase Velocity
- Double Shielded
- FEP Jacket

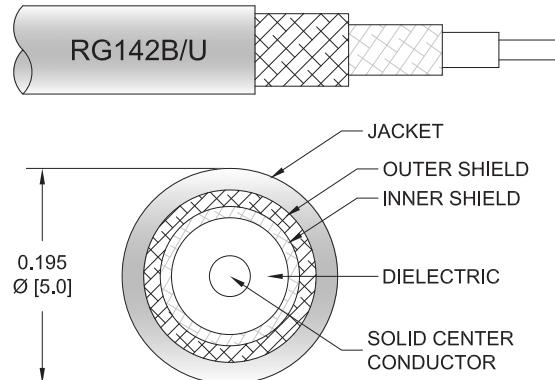

### Applications

- General Purpose
- Laboratory Use

### Description

Pasternack's PE3379 SMA male right angle to type N male cable using RG142 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to type N cable assembly has a male to male gender configuration with 50 ohm flexible RG142 coax. The PE3379 SMA male to type N male cable assembly operates to 8 GHz. The right angle SMA interface on the RG142 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.4:1	
Velocity of Propagation		69.2		%
RF Shielding	90			dB
Capacitance		29.4 [96.46]		pF/ft [pF/m]

### Specifications by Frequency

## SMA Male Right Angle to N Male Cable Using RG142 Coax



**PE3379**

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	500	1000	2000	4000	8000	MHz	
PE3379	Custom Lengths Available	Insertion Loss (Typ.)	0.087 0.29	0.129 0.43	0.184 0.61	0.28 0.92	0.514 1.69	dB/ft dB/m	
PE3379-12	12 inch	Insertion Loss (Typ.)	0.39	0.43	0.49	0.58	0.82	dB	0.134
PE3379-24	24 inch	Insertion Loss (Typ.)	0.48	0.56	0.67	0.86	1.33	dB	0.176
PE3379-36	36 inch	Insertion Loss (Typ.)	0.57	0.69	0.86	1.14	1.85	dB	0.218
PE3379-48	48 inch	Insertion Loss (Typ.)	0.65	0.82	1.04	1.42	2.36	dB	0.26
PE3379-60	60 inch	Insertion Loss (Typ.)	0.74	0.95	1.22	1.7	2.87	dB	0.302

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.2 dB  
Loss due to Connector 2: 0.1 dB  
Base Weight: 0.134 pounds  
Additional Weight per Inch: 0.0035 pounds

## Mechanical Specifications

### Cable Assembly

Weight 0.134 lbs [60.78 g]

### Cable

Cable Type RG142  
Impedance 50 Ohms  
Inner Conductor Type Solid  
Inner Conductor Material and Plating Copper Clad Steel, Silver  
Dielectric Type PTFE  
Number of Shields 2  
Shield Layer 1 Silver Plated Copper Braid  
Shield Layer 2 Silver Plated Copper Braid  
Jacket Material FEP, Tan  
Jacket Diameter 0.195 in [4.95 mm]  
One Time Minimum Bend Radius 0.984 in [24.99 mm]  
Repeated Minimum Bend Radius 2 in [50.8 mm]

## SMA Male Right Angle to N Male Cable Using RG142 Coax

**PE3379**



### Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	N Male
Specification	MIL-STD-348A	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Contact Material and Plating	Brass, Gold	Brass, Silver
Contact Plating Specification	50 $\mu$ in minimum	ASTM-B700
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 $\mu$ in minimum	ASTM-B689
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 $\mu$ in minimum	ASTM-B689
Hex Size	5/16 in	
Torque	5 in-lbs 0.57 Nm	

### Environmental Specifications

Operating Range Temperature -55 to +165 deg C

### Compliance Certifications

(see [product page](#) for current document)


### Plotted and Other Data

Notes:  
Values at 25°C, sea level.

## SMA Male Right Angle to N Male Cable Using RG142 Coax

**PE3379****Typical Performance Data****How to Order**

Part Number Configuration:

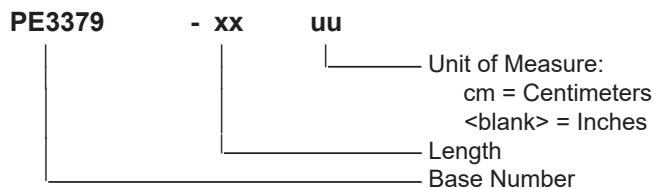

Example: PE3379-12 = 12 inches long cable  
PE3379-100cm = 100 cm long cable

SMA Male Right Angle to N Male Cable Using RG142 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to N Male Cable Using RG142 Coax PE3379](#)

URL: <https://www.pasternack.com/sma-male-right-angle-to-n-male-cable-using-rg142-pe3379-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3379 CAD Drawing

## SMA Male Right Angle to N Male Cable Using RG142 Coax

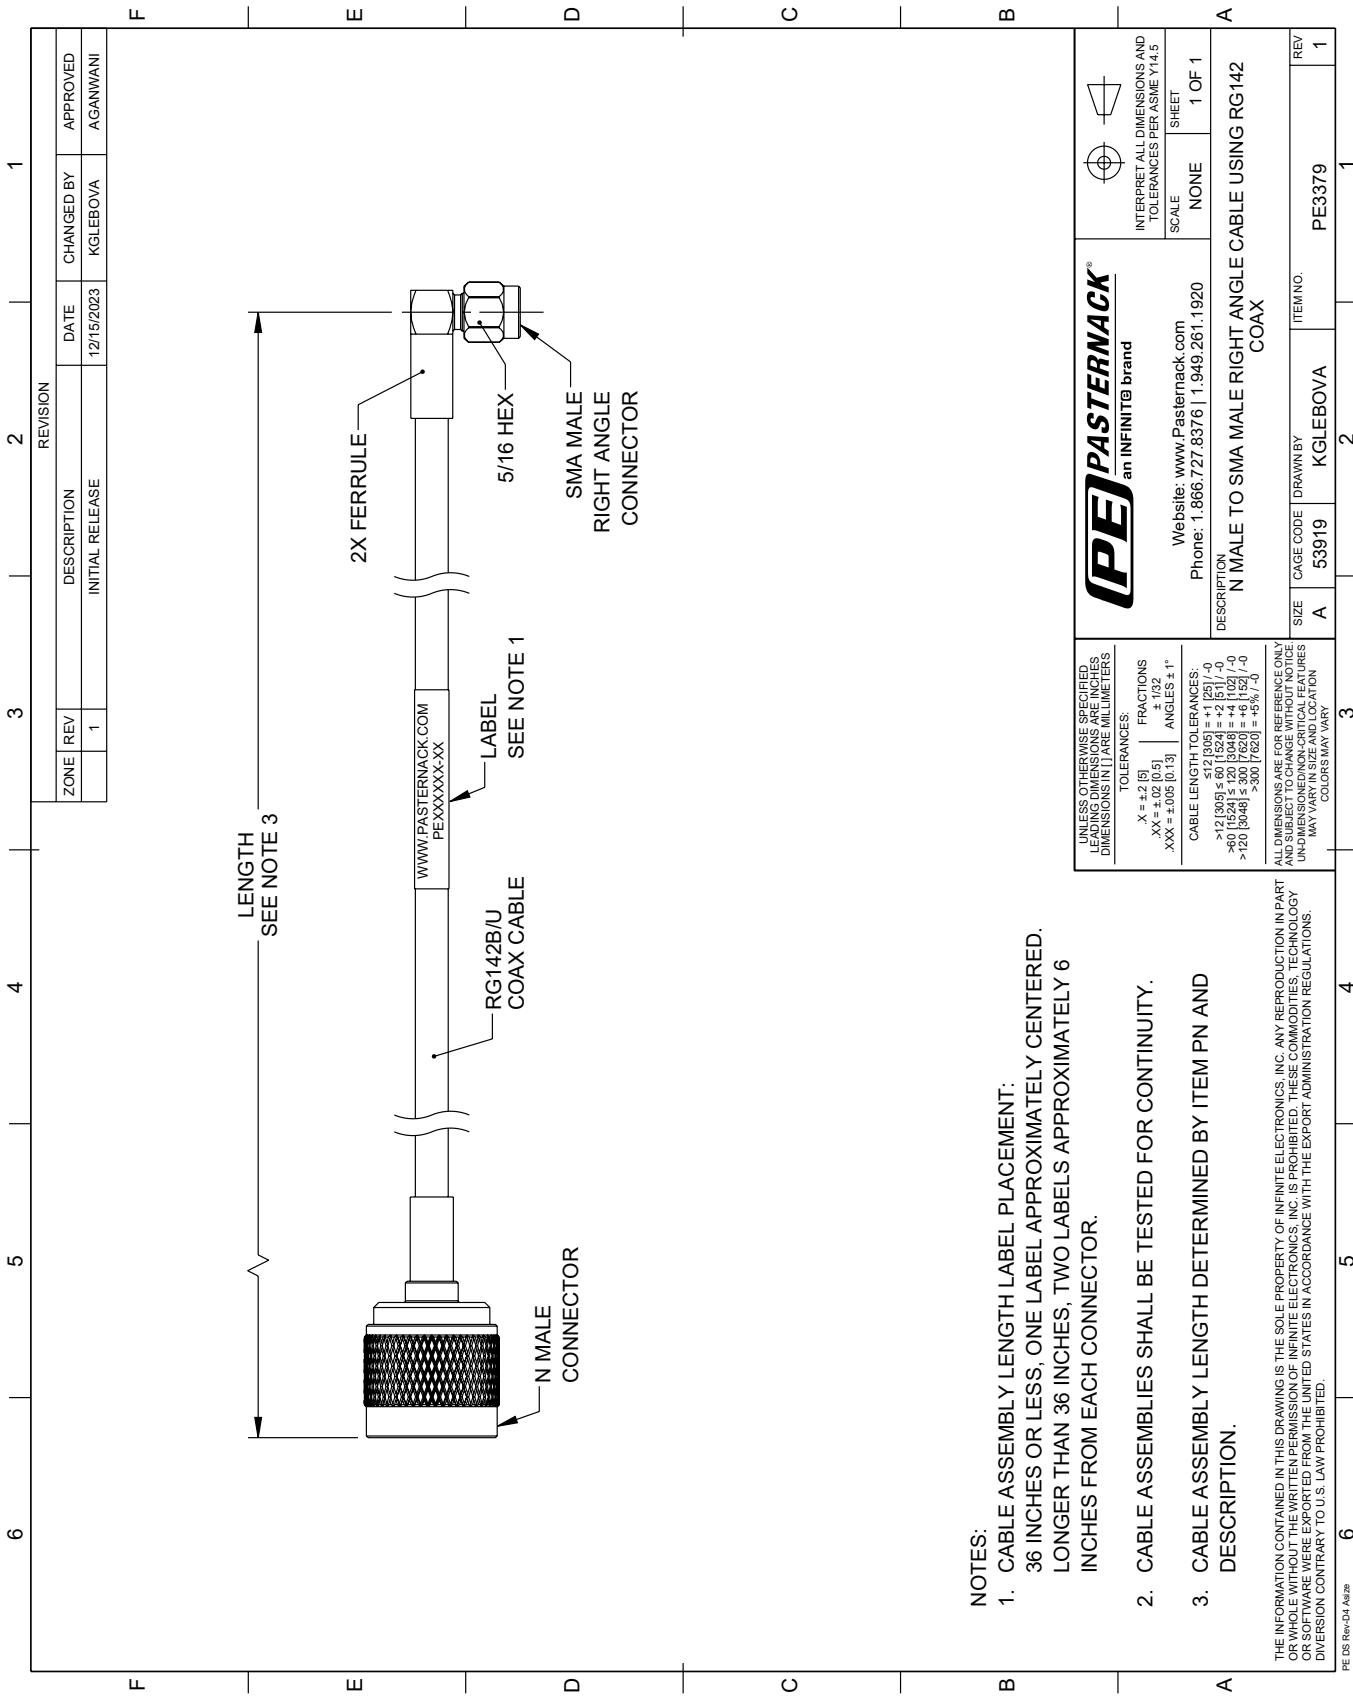

NOTES:  
1. CABL 36 INCHES LONG

2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.