



Fire Rated BNC Female Bulkhead to Mini UHF Male
Low Loss Cable Using LMR-195-FR Coax

RF Cable Assemblies Technical Data Sheet


PE3C5983

Configuration

- Connector 1: BNC Female Bulkhead
- Connector 2: Mini UHF Male
- Cable Type: LMR-195-FR

Features

- Shielding Effectivity > 90 dB
- 76% Phase Velocity
- Double Shielded
- FRPE Jacket

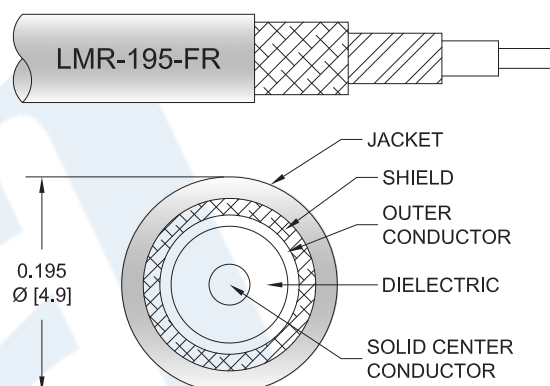

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C5983 BNC female bulkhead to Mini UHF male cable using LMR-195-FR coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to Mini UHF cable assembly has a female to male gender configuration with 50 ohm flexible LMR-195-FR coax. Our RF cable assembly with BNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Fire Rated BNC Female Bulkhead to Mini UHF Male Low Loss Cable Using LMR-195-FR Coax PE3C5983](#)



Fire Rated BNC Female Bulkhead to Mini UHF Male
Low Loss Cable Using LMR-195-FR Coax

RF Cable Assemblies Technical Data Sheet

PE3C5983

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		76		%
RF Shielding	90			dB
Group Delay		1.27 [4.17]		ns/ft [ns/m]
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Inductance		0.064 [0.21]		uH/ft [uH/m]
DC Resistance Inner Conductor		7.6 [24.93]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		4.9 [16.08]		Ω/1000ft [Ω/Km]
Jacket Spark			3,000	Vrms

Mechanical Specifications

Cable Assembly

Weight 0.081 lbs [36.74 g]

Cable

Cable Type	LMR-195-FR
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	FRPE, Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]
Bending Moment	0.2 lbs-ft [0.27 N-m]
Flat Plate Crush	15 lbs/in [0.27 Kg/mm]
Tensile Strength	40 lbs [18.14 Kg]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Fire Rated BNC Female Bulkhead to Mini UHF Male Low Loss Cable Using LMR-195-FR Coax PE3C5983](#)



Fire Rated BNC Female Bulkhead to Mini UHF Male
Low Loss Cable Using LMR-195-FR Coax

RF Cable Assemblies Technical Data Sheet

PE3C5983

Connectors

Description	Connector 1	Connector 2
Type	BNC Female Bulkhead	Mini UHF Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating		Brass, Gold
Contact Plating Specification		30 µin minimum
Dielectric Type		PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification		100 µin minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Fire Rated BNC Female Bulkhead to Mini UHF Male Low Loss Cable Using LMR-195-FR Coax PE3C5983](#)



Fire Rated BNC Female Bulkhead to Mini UHF Male Low Loss Cable Using LMR-195-FR Coax

RF Cable Assemblies Technical Data Sheet

PE3C5983

How to Order

Part Number Configuration:

PE3C5983

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C5983-12 = 12 inches long cable
PE3C5983-100cm = 100 cm long cable

Fire Rated BNC Female Bulkhead to Mini UHF Male Low Loss Cable Using LMR-195-FR Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Fire Rated BNC Female Bulkhead to Mini UHF Male Low Loss Cable Using LMR-195-FR Coax PE3C5983](https://www.pasternack.com/fire-rated-bnc-female-bulkhead-to-mini-uhf-male-low-loss-cable-using-lmr-195-fr-pe3c5983)

URL: <https://www.pasternack.com/fire-rated-bnc-female-bulkhead-to-mini-uhf-male-low-loss-cable-using-lmr-195-fr-pe3c5983-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C5983 CAD Drawing

Fire Rated BNC Female Bulkhead to Mini UHF Male

Low Loss Cable Using LMR-195-FR Coax

