

BNC Male to UHF Male Low Loss Cable Using LMR-400 Coax with Times Microwave Components



PE3C6720

Configuration

- Connector 1: BNC Male
- Connector 2: UHF Male
- Cable Type: LMR-400
- Coax Flex Type: Flexible

Features

- Max Frequency 3 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- PE Jacket
- 500 Mating Cycles


Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C6720 BNC male to UHF male cable using LMR-400 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to UHF cable assembly has a male to male gender configuration with 50 ohm flexible LMR-400 coax. The PE3C6720 BNC male to UHF male cable assembly operates to 3 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

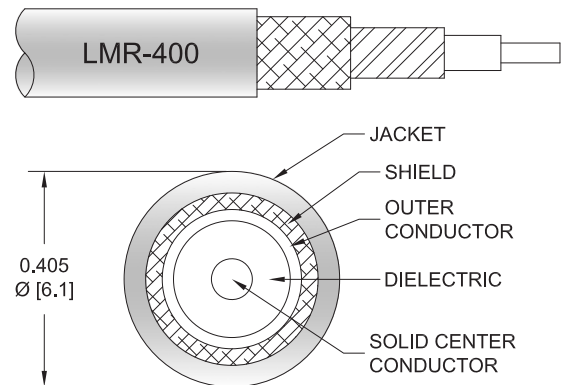

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		85		%
RF Shielding	90			dB
Group Delay		1.2 [3.94]		ns/ft [ns/m]
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		1.39 [4.56]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		1.65 [5.41]		Ohms/1000ft [Ohms/Km]

BNC Male to UHF Male Low Loss Cable Using LMR-400 Coax with Times Microwave Components



PE3C6720

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Jacket Spark			8,000	Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency					MHz	
PE3C6720	Custom Lengths Available	Insertion Loss (Typ.)	0.012	0.02	0.028	0.041	0.073	dB/ft	
			0.04	0.07	0.1	0.14	0.24	dB/m	
PE3C6720-12	12 Inch	Insertion Loss (Typ.)	0.44	0.44	0.45	0.47	0.5	dB	0.243
PE3C6720-24	24 Inch	Insertion Loss (Typ.)	0.45	0.46	0.48	0.51	0.57	dB	0.31
PE3C6720-36	36 Inch	Insertion Loss (Typ.)	0.46	0.48	0.51	0.55	0.64	dB	0.377
PE3C6720-48	48 Inch	Insertion Loss (Typ.)	0.47	0.5	0.54	0.59	0.72	dB	0.444
PE3C6720-60	60 Inch	Insertion Loss (Typ.)	0.48	0.52	0.56	0.63	0.79	dB	0.511

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.25 dB
Loss due to Connector 2:	0.17 dB
Base Weight:	0.243 pounds
Additional Weight per Inch:	0.1325 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.243 lbs [110.22 g]

Cable

Cable Type	LMR-400
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Aluminum
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.405 in [10.29 mm]
One Time Minimum Bend Radius	1 in [25.4 mm]
Repeated Minimum Bend Radius	4 in [101.6 mm]
Bending Moment	0.5 lbs-ft [0.68 N-m]
Flat Plate Crush	40 lbs/in [0.71 Kg/mm]
Tensile Strength	160 lbs [72.57 Kg]

BNC Male to UHF Male Low Loss Cable Using LMR-400 Coax with Times Microwave Components



PE3C6720

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	UHF Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles	500	500
Contact Material and Plating	Brass, Gold	Phosphor Bronze, Silver
Contact Plating Specification	50 microns	200 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tin/Nickel
Body Plating Specification	80 microns	100 µin minimum
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tin/Nickel
Coupling Nut Plating Specification	80 microns	100 µin minimum

Environmental Specifications

Operating Range Temperature -40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

BNC Male to UHF Male Low Loss Cable Using LMR-400 Coax with Times Microwave Components



PE3C6720

Typical Performance Data

How to Order

Part Number Configuration:

PE3C6720

- xx

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3C6720-12 = 12 inches long cable
PE3C6720-100cm = 100 cm long cable

BNC Male to UHF Male Low Loss Cable Using LMR-400 Coax with Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to UHF Male Low Loss Cable Using LMR-400 Coax with Times Microwave Components PE3C6720](#)

URL: <https://www.pasternack.com/bnc-male-to-uhf-male-low-loss-cable-using-lmr-400-pe3c6720-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C6720 CAD Drawing

BNC Male to UHF Male Low Loss Cable Using LMR-400 Coax with Times Microwave Components

