

## N Male to N Male Cable 6 Inch Length Using PE-SR402AL Coax, LF Solder




### PE34138LF-6

#### Configuration

- Connector 1: N Male
- Connector 2: N Male
- Cable Type: PE-SR402AL
- Coax Flex Type: Semi-Rigid

#### Features

- Max Frequency 11 GHz

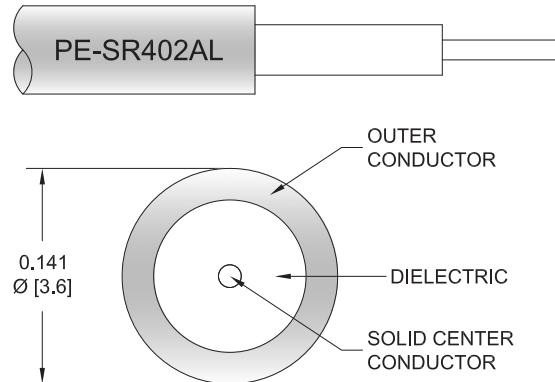

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE34138LF-6 type N male to type N male 6 inch cable using PE-SR402AL coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm semi-rigid PE-SR402AL coax. The PE34138LF-6 type N male to type N male cable assembly operates to 11 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		11	GHz
VSWR			1.4:1	

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	11	GHz
Insertion Loss (Typ.)	0.233	0.265	0.292	0.338	0.443	dB

#### Mechanical Specifications

##### Cable Assembly

Width/Diameter  
Weight

0.827 in [21.01 mm]  
0.175 lbs [79.38 g]

## N Male to N Male Cable 6 Inch Length Using PE-SR402AL Coax, LF Solder



### PE34138LF-6

#### Cable

Cable Type	PE-SR402AL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Outer Conductor 1 Material and Plating	Tinned Aluminum
Repeated Minimum Bend Radius	0.15 in [3.81 mm]

#### Connectors

Description	Connector 1	Connector 2
Type	N Male	N Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	20 $\mu$ in minimum	20 $\mu$ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Gold
Body Plating Specification	80 $\mu$ in minimum	80 $\mu$ in minimum
Seal Gasket Material	Silicone	Silicone

#### Environmental Specifications

Operating Range Temperature -55 to +125 deg C

#### Compliance Certifications

(see product page for current document)

#### Plotted and Other Data

Notes:

Values at 25°C, sea level.

## N Male to N Male Cable 6 Inch Length Using PE-SR402AL Coax, LF Solder




### PE34138LF-6

#### Typical Performance Data

#### How to Order

Part Number Configuration:

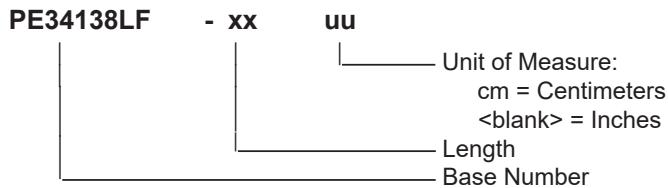

Example: PE34138LF-12 = 12 inches long cable  
PE34138LF-100cm = 100 cm long cable

N Male to N Male Cable 6 Inch Length Using PE-SR402AL Coax, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Cable 6 Inch Length Using PE-SR402AL Coax, LF Solder PE34138LF-6](#)

URL: <https://www.pasternack.com/n-male-to-n-male-cable-6-inch-length-using-pe-sr402al-lf-solder-pe34138lf-6-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE34138LF-6 CAD Drawing

N Male to N Male Cable 6 Inch Length Using PE-SR402AL Coax, LF Solder

