

TNC Male to TNC Male Cable Using RG174 Coax with HeatShrink




PE3425/HS

Configuration

- Connector 1: TNC Male
- Connector 2: TNC Male
- Cable Type: RG174
- Coax Flex Type: Flexible

Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

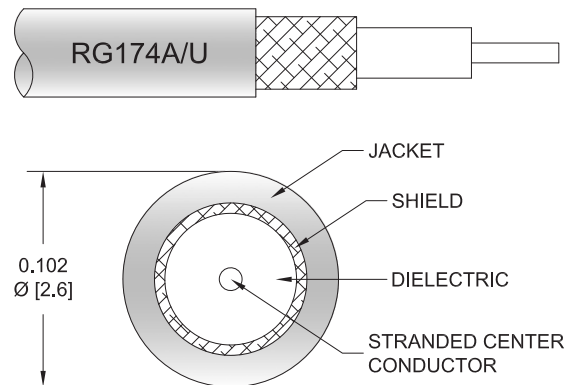

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3425/HS TNC male to TNC male cable using RG174 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to TNC cable assembly has a male to male gender configuration with 50 ohm flexible RG174 coax. The PE3425/HS TNC male to TNC male cable assembly operates to 1 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		31.1 [102.03]		pF/ft [pF/m]

Specifications by Frequency

TNC Male to TNC Male Cable Using
RG174 Coax with HeatShrink



PE3425/HS

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency		50	100	250	500	
PE3425/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.04	0.08	0.14	0.21	0.32	dB/ft	
			0.14	0.28	0.45	0.7	1.05	dB/m	
PE3425/HS-12	12 inch	Insertion Loss (Typ.)	0.25	0.29	0.34	0.42	0.52	dB	0.079
PE3425/HS-24	24 inch	Insertion Loss (Typ.)	0.29	0.37	0.48	0.63	0.84	dB	0.088
PE3425/HS-36	36 inch	Insertion Loss (Typ.)	0.33	0.46	0.62	0.84	1.16	dB	0.097
PE3425/HS-48	48 inch	Insertion Loss (Typ.)	0.37	0.54	0.75	1.05	1.48	dB	0.106
PE3425/HS-72	72 inch	Insertion Loss (Typ.)	0.46	0.71	1.03	1.47	2.12	dB	0.124

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB
 Loss due to Connector 2: 0.1 dB
 Base Weight: 0.079 pounds
 Additional Weight per Inch: 0.00075 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter: 0.5 in [12.7 mm]
 Weight: 0.079 lbs [35.83 g]

Cable

Cable Type: RG174
 Impedance: 50 Ohms
 Inner Conductor Type: Stranded
 Inner Conductor Material and Plating: Copper Clad Steel, Silver
 Dielectric Type: PE (LD)
 Number of Shields: 1
 Shield Layer 1: Tinned Copper Braid
 Jacket Material: PVC, Black
 Jacket Diameter: 0.11 in [2.79 mm]

TNC Male to TNC Male Cable Using RG174 Coax with HeatShrink



PE3425/HS

Connectors

Description	Connector 1	Connector 2
Type	TNC Male	TNC Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	100 µin minimum

Environmental Specifications

Operating Range Temperature -40 to +80 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

TNC Male to TNC Male Cable Using RG174 Coax with HeatShrink




PE3425/HS

Typical Performance Data

How to Order

Part Number Configuration:

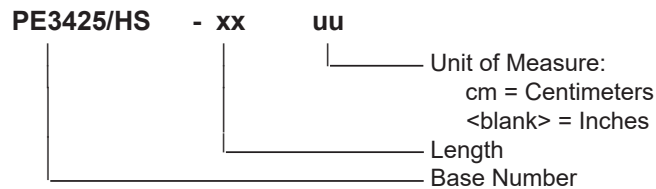

Example: PE3425/HS-12 = 12 inches long cable
PE3425/HS-100cm = 100 cm long cable

TNC Male to TNC Male Cable Using RG174 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Cable Using RG174 Coax with HeatShrink PE3425/HS](#)

URL: <https://www.pasternack.com/tnc-male-to-tnc-male-cable-using-rg174-with-heatshrink-pe3425-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3425/HS CAD Drawing

TNC Male to TNC Male Cable Using RG174 Coax with HeatShrink

